


STATE OF IDAHO
DEPARTMENT OF RECLAMATION
BOISE

REPORT OF EXAMINER

PERMIT NO. G-32233/25-2148

REPORT ON PROOF OF B/U - Jerry Pancheri

Hollowshell Pump Motor
H.P. 30 3000 60°
Serial: 3293987
Byron Jackson Pump
Serial 896624
8' discharge

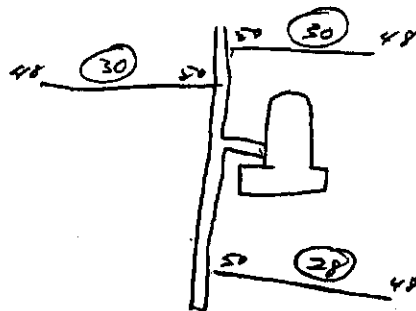

6
5.7
90
448 5130
448
620
448
2020

65

46.

T. 4 N

R

40

E

Sec. 27

20 9

38

Sec. 34

88 heads $\frac{1}{64}$ " 49 lbs

$$590 \times 88 = 519 \text{ gpm}$$

$$519 \div 447 = 1.16 \text{ cfs}$$

$$\text{Area} = 67 \text{ acres}$$

$$Q = 1.16 \text{ cfs}$$


$$V = 3.5 \times 67 = 234.5 \text{ A.F.}$$

$$\text{Acre Foot} = 3.5$$

$$\text{Sub} = 3$$

$$\text{Answer} = \text{Non-a}$$

Fe chari

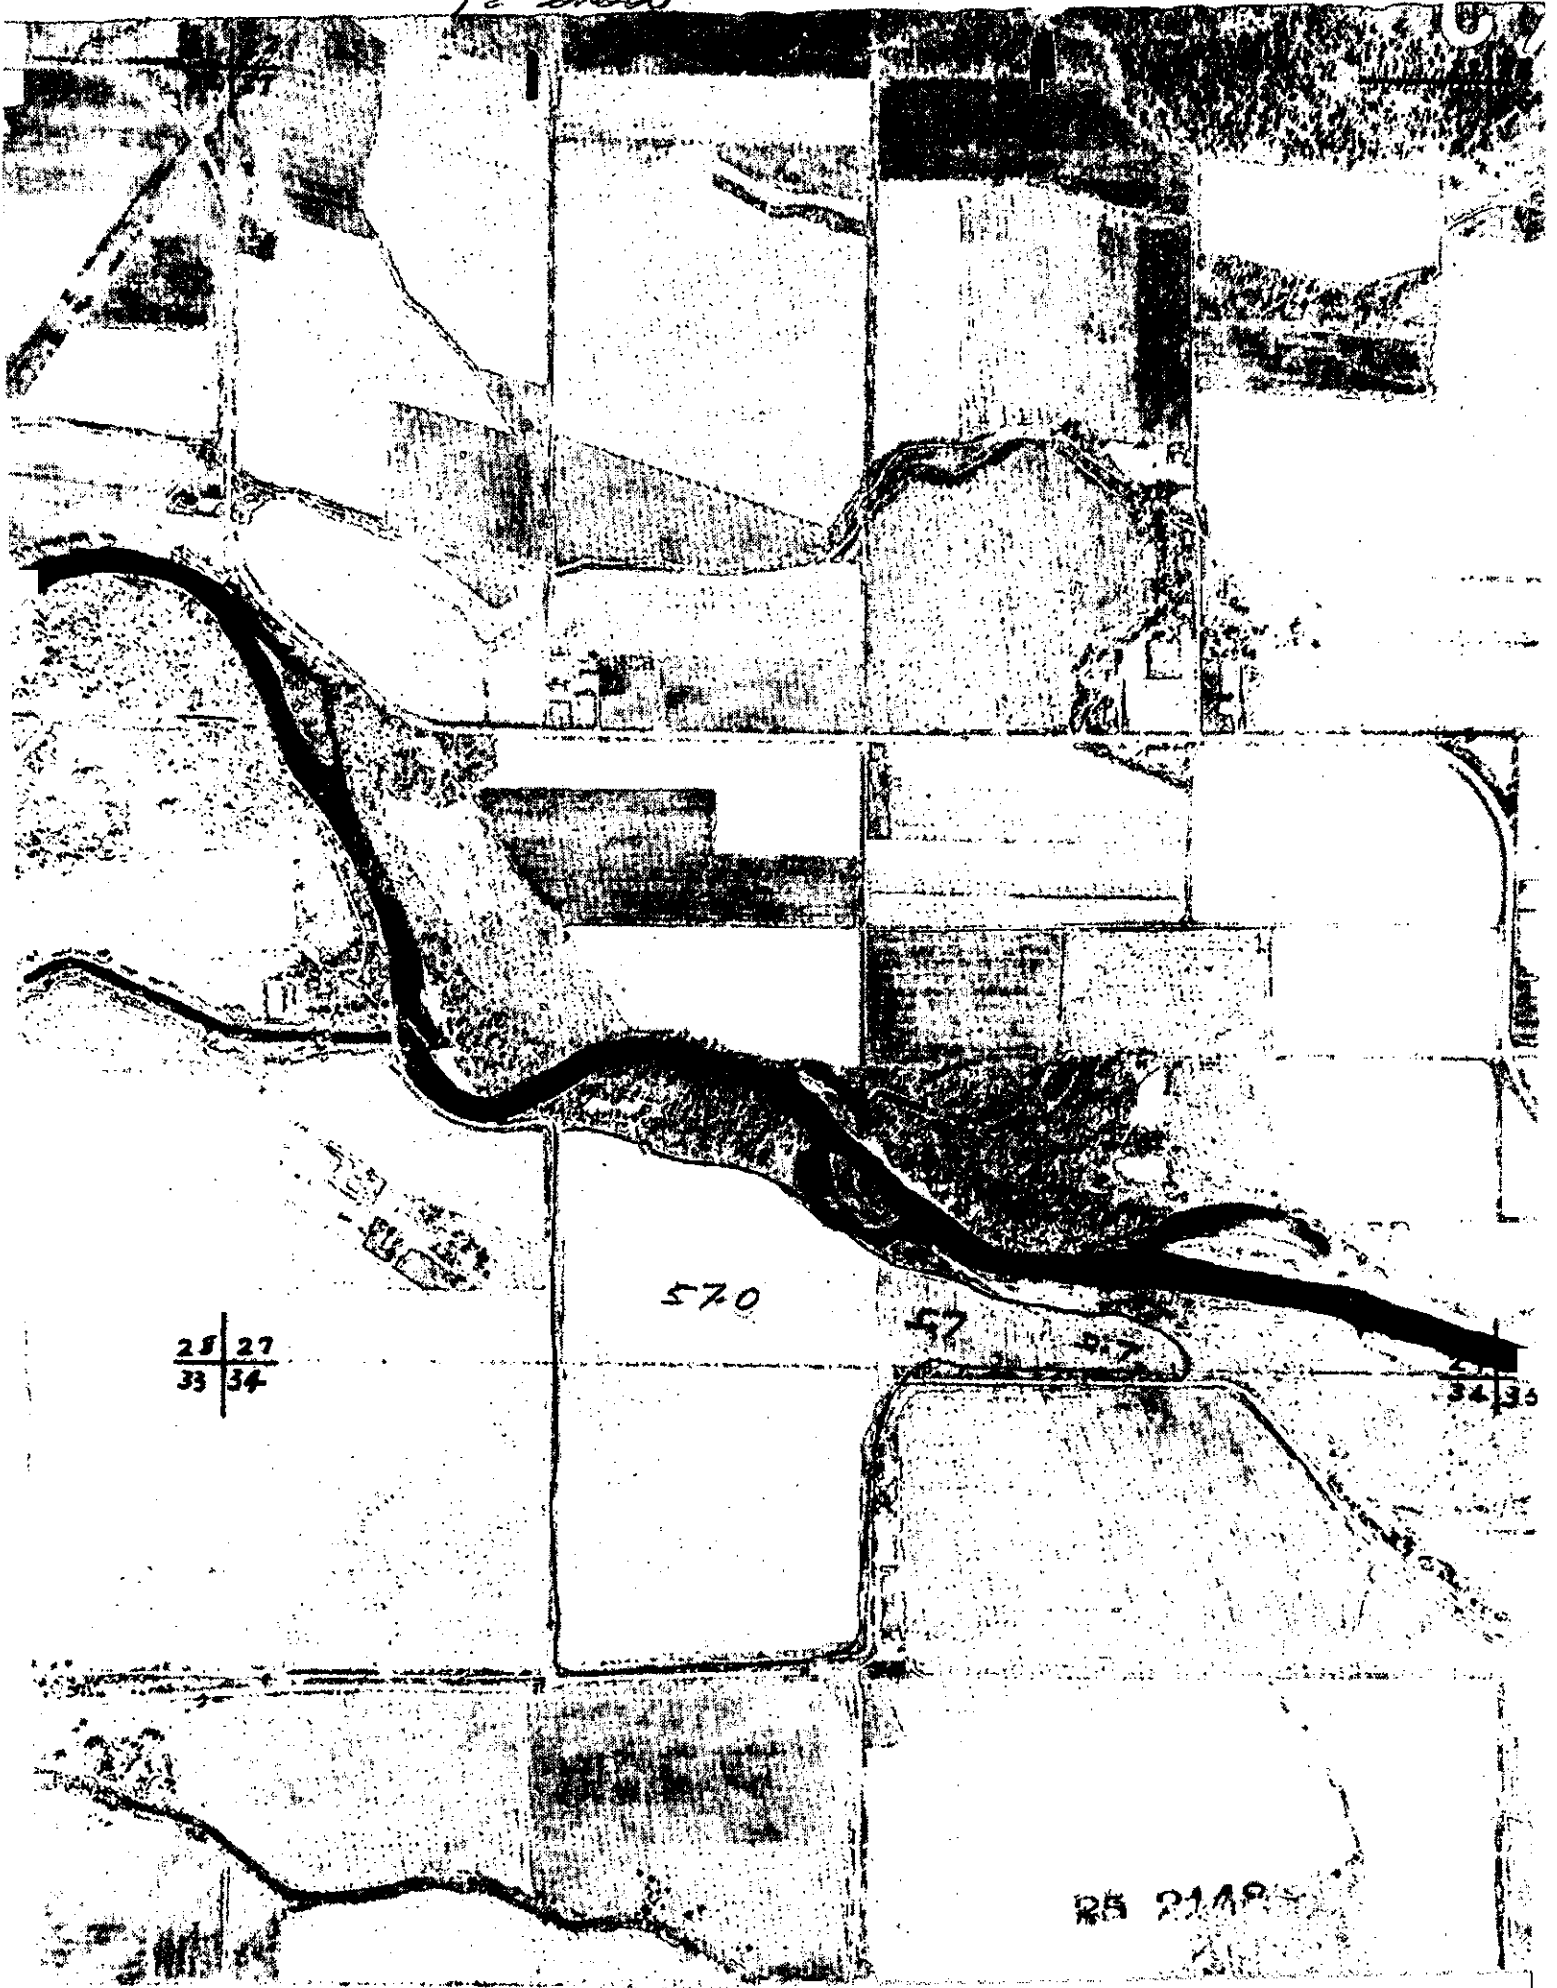

LICENSING DATA ANALYSIS

1. Permit No. 25-2198
2. Name license is to be issued in Terry Paraheri
Assignment required - Yes No ✓
3. Date of first receipt 1-26-65 Date proof due 2-19-70 Made 1-23-70
4. Priority Late proof - Yes No ✓
5. Source groundwater tributary
6. Point of diversion:
Twp. 4 N/S, Rge. 45 E/W, B.M., Sec. 34, NE $\frac{1}{4}$ NW $\frac{1}{4}$
Twp. N/S, Rge. E/W, B.M., Sec. , $\frac{1}{4}$ $\frac{1}{4}$
Twp. N/S, Rge. E/W, B.M., Sec. , $\frac{1}{4}$ $\frac{1}{4}$
Amendment required - Yes No ✓
7. Beneficial use for license:
Amt. 1.14 for irrigation from April 1 to Nov 1 AF 234.5
Amt. for from to AF
Amt. for from to AF
Amount not to exceed at any one time 1.16 c.f.s. or 234.5 acre feet per season or 3.5 acre feet per acre
Amendment required - Yes No ✓
8. Permitted Amount: 1.14 c.f.s. Volume for season AF
9. Measured Amount: 1.14 Reason for reduction
0. Description and location of place of use:

[illegible]

Total No. of acres 67

Supplemental acreage - Yes No /

Total permitted acres 85

Amendment required - Yes _____ No ✓

11. Remarks: _____

12. Measuring device required - Yes _____ No ✓

13. Type of letter required: Fee Notice

14. Analysis by JPB Date 13/1/70 Checked by D Date 5-2-71

STATE OF IDAHO
DEPARTMENT OF RECLAMATION
BOISE, IDAHO
REPORT OF EXAMINER

Permit No. G-32233/25-2148

This proof is for b/u In Water District No. _____

1. Name of applicant Jerry Pancheri, Route 2, Box 266, Rigby, Idaho
2. Source of water supply: groundwater
3. Location of point of diversion: Is in the NE 1/4 of Section 34
T. 4 N R. 40 E County of Jefferson
4. Describe works as they exist, giving dimensions and capacities of same: 16" wall depth cased complete to 60'. 30 HP motor 6" column - 40' in length 10" bowls - 4 stage 700 GPM - 6" mainline with 4" lateral sprinklerlines

5. Water is used for irrigation
6. State whether or not water has been turned into works of diversion: _____

7. List legal subdivisions of lands to be irrigated. If proof is for beneficial use, give exact number of acres under cultivation in each forty-acre tract. (Describe manner and place of use if other than irrigation):

T. 4 N. R. 40 E.	Sec. 27	SE 1/4, SW 1/4	35 acres
	34	NE 1/4	40 acres

(Submit map on attached plat, showing location and details of above description.)

8. What large stream would the water here appropriated finally reach? _____

Remarks: Irrigated with Sprinklers:
measured with pressure gauge

88 Nozzles 1 1/4" 49 lbs

$$\frac{59.0 \times 88}{448.8} = 1.16 \text{ c.f.s.}$$

This examination was made on the 16th day of July, 19 30

(Signed) [Signature]
Examiner.

25 2148

my
8-19-30

6/25/2003

Talked with Todd Sutton (538-6971) regarding 3 wells. Said they have not been used since he's been there (16 years.).

25-11526

25-11528

25-11533

7/9/2003 Talked w/ Todd Sutton. Will let me know next week about the last time the wells were used. They no longer use these wells because their process water and supplemental canal shares is sufficient for the irrigation of the ground formerly irrigated by these wells.



IDAHO DEPARTMENT OF WATER RESOURCES

SNAKE RIVER BASIN ADJUDICATION - BASIN 23-27

RIGHT ID 25 11526
POD ID 147198
Folder No. A2511526
Claim Status Not in Use
IDTMEAST 682309
IDTMNORTH 284744
GPSID A0011946

Diversion Description

16" X 100' WELL W/ 30HP PUMP TO SPRINKLER SYSTEM. Casing is on the East side of the road. Well is not used (per Nathan Taylor, Idaho Pacific Corp.).

Assumptions

POD is no longer in use.

Invoice

2000-055-23-27-0

Phase-0 (No Attention)
Phase-I (Ready to Go to Field)
Phase-II (Site Visit - Data Missing)
Phase-III (Complete w/issues)

Linked

photos\25-11526-001.JPG photos\25-11526-003.JPG photos\25-11526-005.JPG

Photos

photos\25-11526-002.JPG photos\25-11526-004.JPG

GPS Accuracy (ft)

14 Feet

Date (M/D/Y)

07-02-02

Time

14:30

Flow Rate (CFS)

#Error

Open Channel Flow

☐ Complete one box from both Area and Calculation sections

Cross Sectional Area

☐ Circular Channel

- ☐ Less than half full
☐ Half full
☐ More than half full
☐ Full

Diameter 0

Depth 0

☐ Rectangular Channel

Width 0

Depth 0

Flow Calculation

☐ Continuity Velocity 0

☐ Orifice

(Use only for head over a pipe flowing full with free discharge)

Depth of Water above orifice centerline 0

☐ Weir

(Use only for water flowing freely over weir)

Height of water above nappe 0

Width of weir 0

☐ Manning (If used, include photo of representative channel section)

Channel Slope

Channel Description

Concrete lined	.016
Smooth earth	.025
Earth	.033
Rough bed, weeds on sides	.04
Smooth natural stream	.033
Rough natural stream	.1

Pumped System



HP 0

Pressure Head (psi) 0

Elevation Head (ft) 0

Motor Mfg N/A

Motor Serial # N/A

Pump Type N/A

Pump Mfg N/A

Pump Serial# N/A

New Contact Information



New Contact Comments

Nathan Taylor, Idaho Pacific Corporation

This Form and the associated query are the exclusive intellectual property of Intrepid Technology Resources Inc., and may not be copied, modified, or distributed without the express written consent of Intrepid Technology and Resources, Inc.



intrepid technology & resources
incorporated

FOLDER NO. A2511526