

STATE OF IDAHO
DEPARTMENT OF WATER RESOURCES
BENEFICIAL USE FIELD REPORT

A. GENERAL INFORMATION

Permit No: 97-07370

Exam Date: ~~7/10/2004~~

6/22/2018

1. Current Owner:
HUCKLEBERRY BAY CO 818 W RIVERSIDE STE 300 SPOKANE WA 99201 (509) 459-6100

2. Accompanied by: Dean Fiedler
Phone No: : (208) 443.2258
Address: 1086 S Shores RD Coolin ID 83821
Relationship to Permit Holder: Operator

3. SOURCE:
GROUND WATER

TRIBUTARY:

B. OVERLAP REVIEW

- Other water rights with the same place of use:
- Other water rights with the same point-of-diversion: 97-07293 (HUCKLEBERRY BAY CO)

C. DIVERSION AND DELIVERY SYSTEM Two wells pump directly to two storage reservoirs with water lines to separate subdivisions and un-platted lots in Huckleberry Bay Co. development on Northeast shore of Priest Lake. The two wells used for 97-07370 also are used to provide water to the Sandy Shores subdivision and one unplatted lot under License 97-07293.

1. LOCATION OF POINT(S) OF DIVERSION:

GROUND WATER L4 (SW¼SE¼) Sec. 27, Twp 62N, Rge 04W, B.M. BONNER County

GROUND WATER L4 (SW¼SE¼) Sec. 27, Twp 62N, Rge 04W, B.M. BONNER County

Method of Determination: Map-'Priest Lake NE' U.S. Geological Survey 7.5' Quadrangle (Topographic) 1967, ArcMap™
Geographic Information System (GIS) software, Garmin GPS Receiver

2.

PLACE OF USE: DOMESTIC

Twp	Rge	Sec	NE				NW				SW				SE				Totals
			NE	NW	SW	SE	NE	NW	SW	SE	NE	NW	SW	SE	NE	NW	SW	SE	
62N	04W	15													X L 1		X L 2	X L 1	
62N	04W	22	X	X L 1															
62N	04W	26									X	X	X						
62N	04W	27															X L 4		
62N	04W	35					X	X L 1		X L 2									

PLACE OF USE: IRRIGATION

Twp	Rge	Sec	NE				NW				SW				SE				Totals
			NE	NW	SW	SE	NE	NW	SW	SE	NE	NW	SW	SE	NE	NW	SW	SE	
62N	04W	15													0.1 L 1	0.1 L 2	1.5 L 2	0.8 L 1	2.5
62N	04W	22	0.1	0.1 L 1															.2
62N	04W	26									2.0	2.0	1.4						5.4
62N	04W	27															0.3 L 4		.3
62N	04W	35					3.5	2.8 L 1		0.6 L 2									6.9

Total Acres: 15.3

97-07370

3.

✓ Delivery System Diagram Attached (required). Indicate all major components and distances between components. Indicate weir size/pipe as applicable.

✓ Map Attached Showing Location(s) of point(s) of diversion and place(s) of use (required). Scale must be 1:24,000 or greater.

✓ Aerial Photo Attached (required for irrigation of 10+ acres).

✓ Photo of Diversion and System Attached

4.

Well or Diversion ID No.*	Motor Make	Hp	Motor Serial No.	Pump Make	Pump Serial No. or Discharge Size
Well 1	Franklin	7.5	Submersible	Grundfos	95S10-1270 per 2001 IDWR Exam
Well 2	Franklin	10	Submersible	Grundfos	75S-12 per 2001 IDWR Exam

*Code to correspond with No. on map and aerial photo

D. FLOW MEASUREMENTS (None: See Theoretical Measurement below)

1. IDWR Flow meter not used (See Narrative)

2. Measurements: Theoretical

		PUMP	EQUATIONS	WATER RIGHT	97-07370	Well 1
		HP	H in feet	Efficiency as a decimal	Pumping lift in feet	System pressure in PSI
Q =	$\frac{HP \cdot 8.8 \cdot \text{Eff}}{H}$	7.5	234.0816327	0.7	130	45
Q =		0.198 CFS	88.7 GPM			

		PUMP	EQUATIONS	WATER RIGHT	97-07370	Well 2
		HP	H in feet	Efficiency as a decimal	Pumping lift in feet	System pressure in PSI
Q =	$\frac{HP \cdot 8.8 \cdot \text{Eff}}{H}$	10.0	154.0816	0.7	50	45
Q =		0.400 CFS	179.7 GPM			

E. FLOW CALCULATIONS

Measured Method:

F. VOLUME CALCULATIONS

1. Volume Calculations for Irrigation:

$$V_{IR} = (\text{Acres Irrigated}) \times (\text{Irrigation Requirement}) = (15.3 \text{ Acres}) \times (3.0 \text{ AF per Acre}) = 45.9 \text{ AF}$$

Additional Computation Sheets Attached

$$V_{DR} = [\text{Diversion Rate (cfs)}] \times (\text{Days in Irrigation season}) \times 1.9835 = (0.32 \text{ cfs}) \times (214) \times (1.9835) = 135.83$$

$$V = \text{Smaller of } V_{IR} \text{ and } V_{DR} = 45.9 \text{ AF}$$

2. Volume Calculations for Other Uses: Domestic (51 homes/stub-ins) $\times 0.6 \text{ AFA} = 30.6 \text{ AF}$
 30.6 AF and .33 cfs determined by IDWR Administrative Memo #22.

97-07370

G. NARRATIVE/REMARKS/COMMENTS

A second 97-07370 Exam was done in June 2018 to correct problems in the original 2001 Exam. First Exam problems are the correct number of homes connected or stubbed-in to the water system on the Proof Of Beneficial Use date (3/28/2001), the correct location(s) for the connected homes/ stub-ins, and the correct legal description for the additional homes / stub ins that have been connected to the Huckleberry Bay Co. water system but not covered by Water Right 97-07293, licensed in 2007, and/or Permit 97-07370. 51 homes / stub-ins and 15.3 acres irrigation are recommended for licensing.

Legal descriptions for the Permit 97-07370 well Points of Diversion shown in the 2001 Exam are correct. Two wells pump directly to two storage reservoirs. Well configuration and pipes leading to the storage reservoirs don't permit accurate measurement with IDWR portable flowmeters for the 2018 Exam.

Well information shown in the 2001 Exam is correct. The Well 1 pump was a 7.5 Horsepower (HP) Grundfos in 2001 and has been replaced by a 7.5 HP Franklin according to a 2017 Idaho Department of Environmental Quality (IDEQ) Drinking Water Supply Report. A 10 HP Well 2 Grundfos pump in the 2001 Exam remains in use according to the IDEQ Report.

2018 flows are slightly higher than those shown in the 2001 Exam and IDEQ's 2017 Report. Both wells have circular vaults with a flowmeter and gate valve. I climbed into the vaults and saw fluctuating Gallon Per Minute (GPM) readings on both flowmeters. The Well 2 flowmeter's transparent cover had been knocked off during recent repair work and dirt was present on the meter dial. The flowmeter needle moved and appeared to be operating normally. The flowmeters showed Well 1 produced 100 Gallons Per Minute (GPM) and Well 2 produced 90 GPM. Theoretical calculations for each well are shown separately in this report. IDEQ well tag E0005720 was on the Well 1 casing. GPM readings from the 2001 and 2018 IDWR Exams and IDEQ's 2017 report are summarized below. I recommend that the 2001 IDWR Field Examiner's recommendation of .40 CFS be used for licensing 97-07370.

<u>Data Source</u>	<u>Well 1 GPM</u>	<u>Well 2 GPM</u>	<u>Total GPM</u>	<u>CFS Total</u>
2001 IDWR Exam	75	100	175	.40 CFS
2017 IDEQ	70	110	180	.40 CFS
2018 IDWR Exam	100	90	190	.42 CFS

The 2001 Proof Of Beneficial Use submitted to IDWR shows 98 households / stub-ins connected to the water system. The total of 98 households /stub-ins includes 36 connections previously licensed under Water Right 97-07293, an eight lot subdivision (Cedars at Huckleberry) that was not included in Condition 8 of Permit 97-07370 or the Permit Place Of Use legal descriptions, and one home (Gamon) in Huckleberry Waterfront Estates. I found evidence for 51 of the 53 households /stub-ins shown on the Permit, as summarized below, by the 2001 Proof of Beneficial Use date.

<u>Subdivision</u>	<u>Permit (# of lots)</u>	<u>Developed-Stub In by 3/28/2001</u>
Canoe Point Family Estates	8	8
Huckleberry Family Estates	1	1 (Added to Canoe Point Line)
Huckleberry Waterfront Estates	3	1 (Added to Sandy Shores line)
Ridgeview Terrace Family Estates	27	27
<u>Huckleberry Bay Family Estates</u>	<u>14</u>	<u>14</u>
	53	51

The Permit was issued for 15.9 acres of Irrigation (.3 acres per lot). Eight lots are occupied by full time residences according to the 2017 IDEQ report. Several lots in the Canoe Point subdivision exceed .3 acres of Irrigation. Most lots showed well under .3 acres of Irrigation. 15.3 acres of irrigation is recommended for the license.

Huckleberry Bay Co. has extended water lines or stub-ins, and/or connected homes or buildings, to several places of use that are not covered by License 97-07293 or Permit 97-07370. These include the Cedars at Huckleberry subdivision, North of the Narrows Fire Station / Community Center, Sandy Shores Ridge subdivision and South Shores subdivision.

The 2001 Exam report narrative incorrectly indicates 45 lots in Section 3, Township 62N, Range 04 West should be added to the Permit. This can't be done without expanding the CFS amounts for Domestic and Irrigation use. The 45 lots refers to the South Shores subdivision that are in Section 3, Township 61N, Range 04 West and outside the Permit 97-07370 POU.

97-07370 should have a combined use limit of .40 CFS & 125.1 Acre Feet (AF) when used in combination with the License (97-07293). **Have conditions of permit approval been met** ☒ Yes ☐ No

H. RECOMMENDATIONS

1. Recommended Amounts

<u>BENEFICIAL USE</u>	<u>PERIOD OF USE</u>	<u>DIVERSION RATE</u>	<u>ANNUAL VOLUME</u>
IRRIGATION	04/01 to 10/31	0.32 CFS	45.9 AF
DOMESTIC	01/01 to 12/31	0.33 CFS	30.6 AF
	<u>Totals:</u>	0.40 CFS	76.5 AF

2. Recommended Amendments

☐ Change P.D. as reflected above ☐ Add P.D. as reflected above ☒ None

☐ Change P.U. as reflected above ☐ Add P.U. as reflected above ☒ None


Season of Use incorrectly stated on Permit as 3-15 to 11-15.

I. AUTHENTICATION

Field Examiner's Name William M. Maly Date 11/14/2018

Reviewer Douglas J. [Signature] Date 11/14/18

DELIVERY SYSTEM DIAGRAM (NOT TO SCALE)

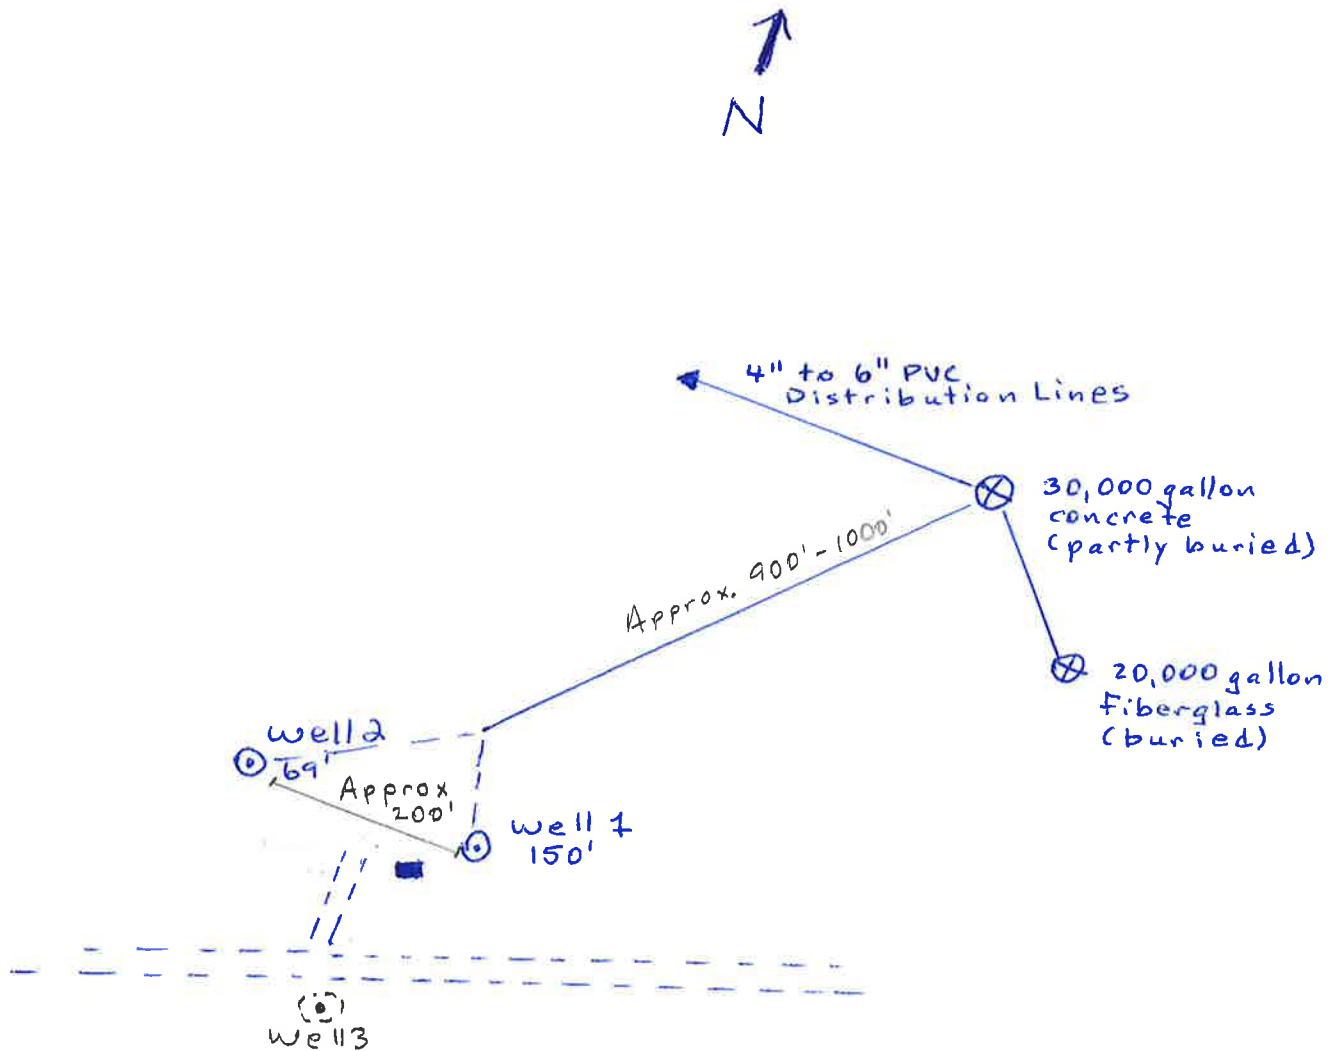


Legend

- ⊙ Planned Well
- ⊙ Well
- ⊗ Reservoir
- Pump House

—●—●— Water Line
 --- Road

97-07370

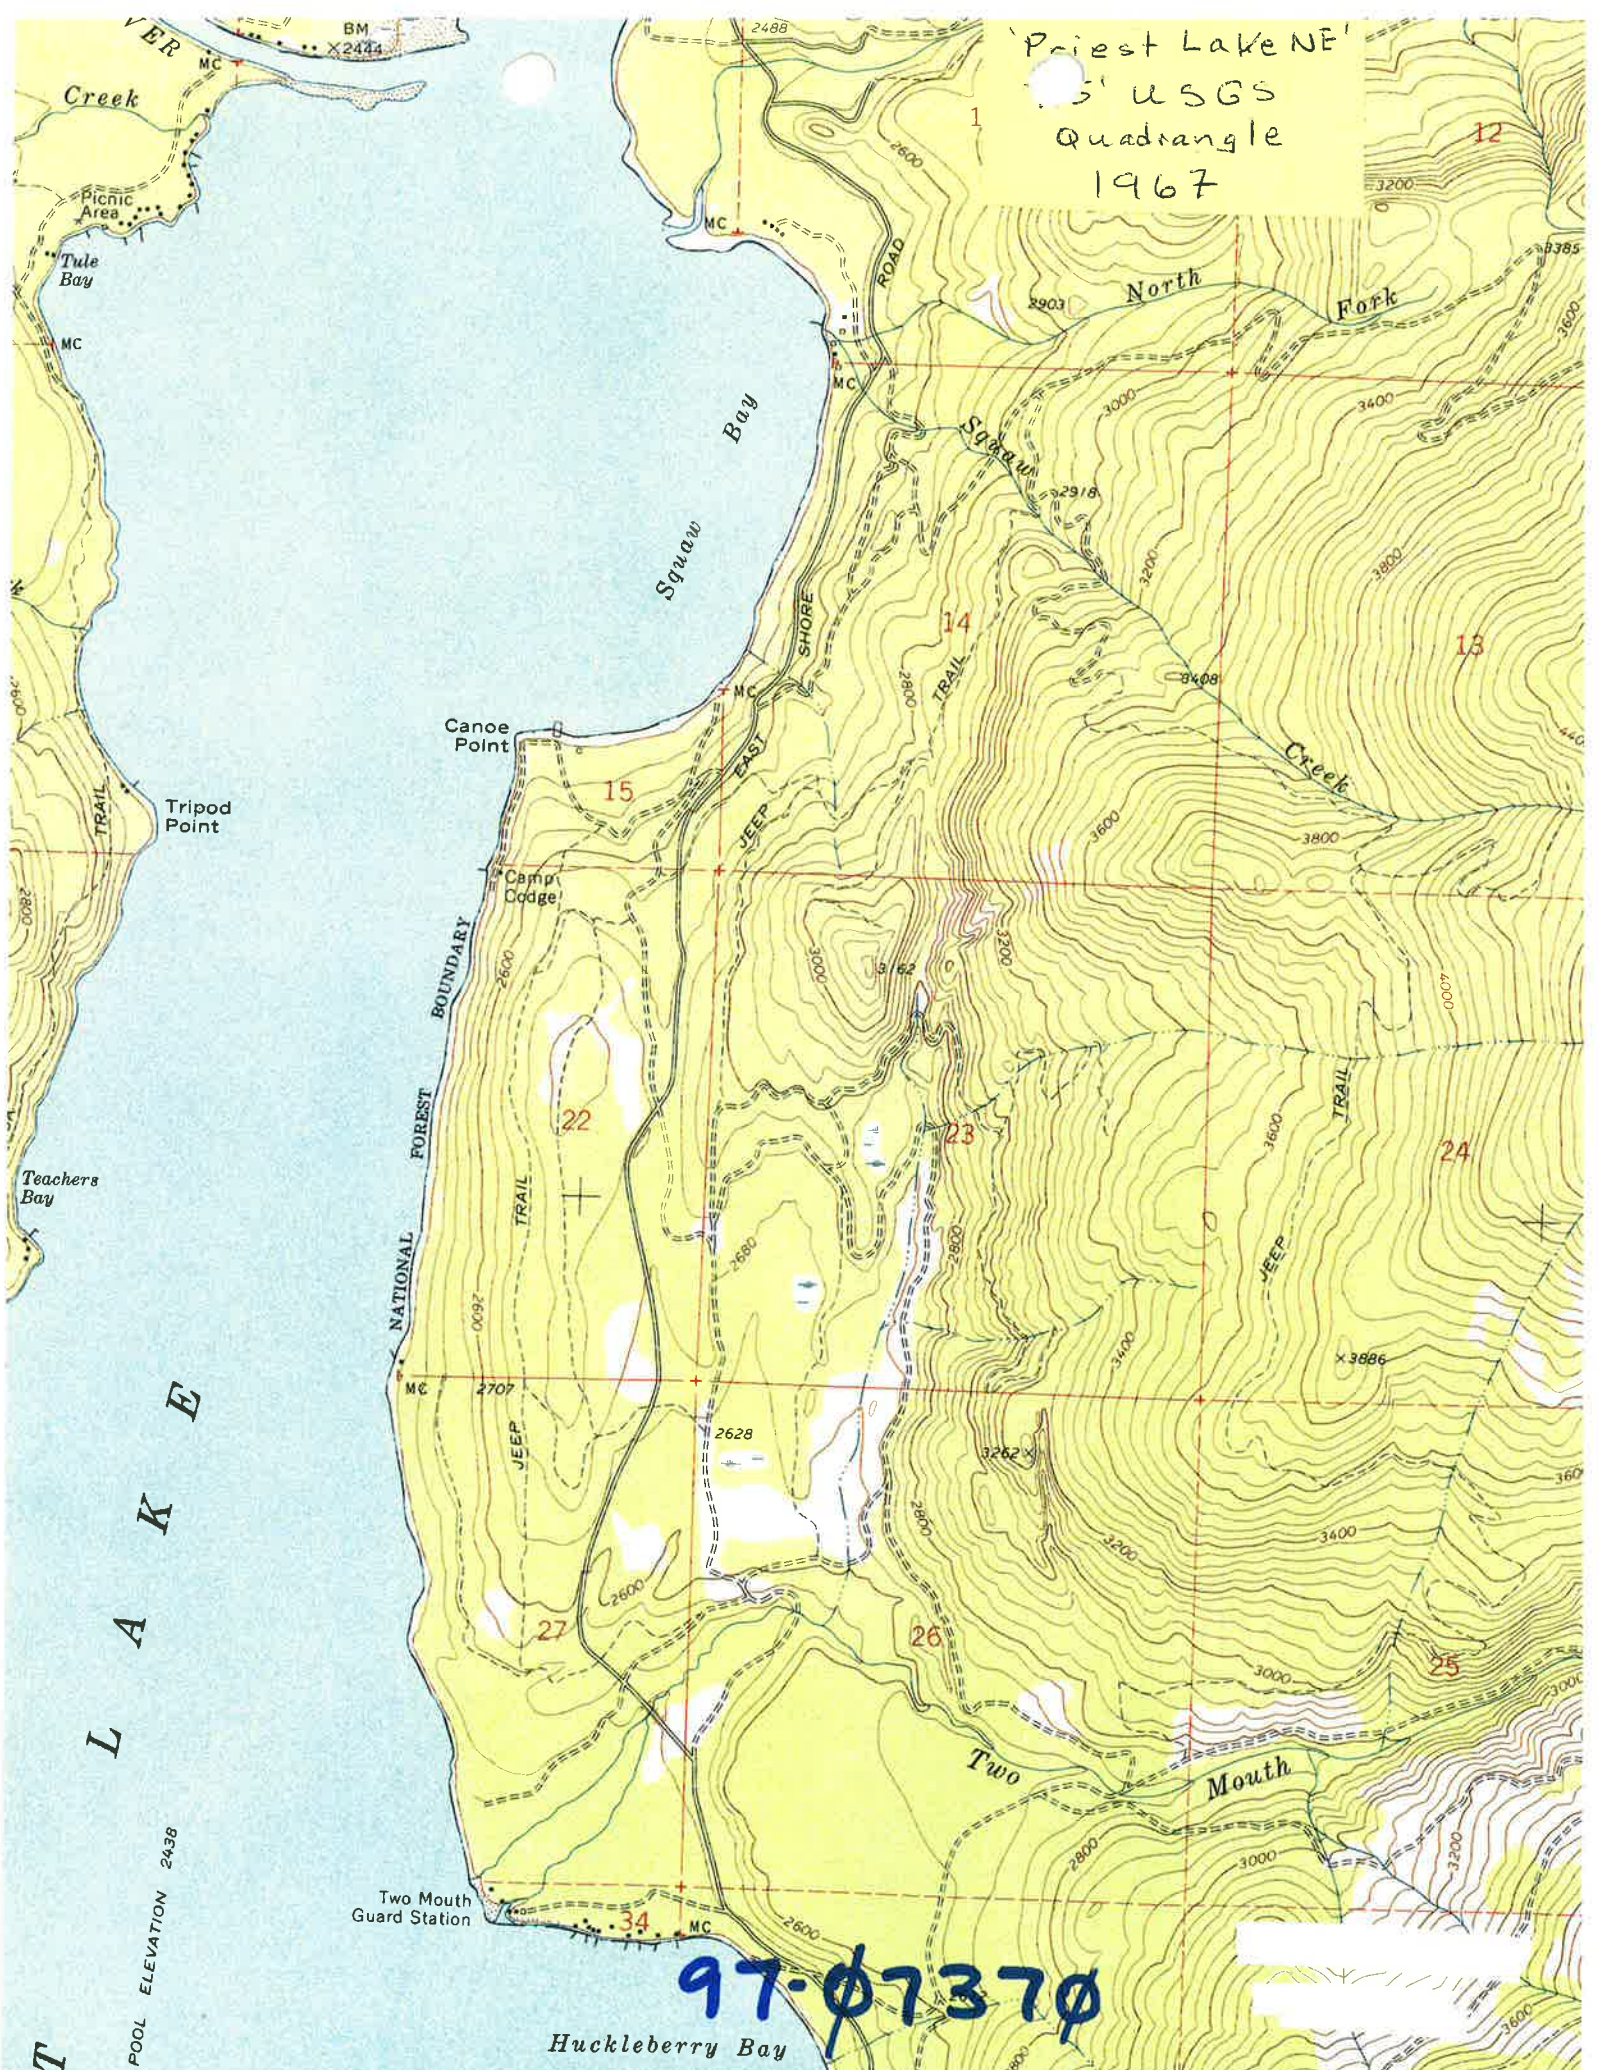

Priest Lake NE
1967
USGS
Quadrangle

97-07370

Huckleberry Bay

T
L
A
K
E

POOL ELEVATION 2438

Two Mouth
Guard Station

Canoe
Point

Camp
Dodge

Tripod
Point

Teachers
Bay

Creek

Squaw
Bay

North

Fork

Mouth

Two

NATIONAL
FOREST
BOUNDARY

JEEP
TRAIL

JEEP
TRAIL

Squaw
TRAIL

Tule
Bay

Picnic
Area

MC

MC

MC

MC

MC

MC

x 3886

x 3262

x 3162

2628

2707

2600

2800

3000

3200

3400

3600

3800

4000

4200

4400

4600

4800

5000

5200

5400

5600

5800

6000

6200

6400

6600

6800

7000

7200

7400

7600

7800

8000

8200

8400

8600

8800

9000

9200

9400

9600

9800

10000

10200

10400

10600

10800

11000

11200

11400

11600

11800

12000

12200

12400

12600

12800

13000

13200

13400

13600

13800

14000

14200

14400

14600

14800

15000

15200

15400

15600

15800

16000

16200

16400

16600

16800

17000

17200

17400

17600

17800

18000

18200

18400

18600

18800

19000

19200

19400

19600

19800

20000

20200

20400

20600

20800

21000

21200

21400

21600

21800

22000

22200

22400

22600

22800

23000

23200

23400

23600

23800

24000

24200

24400

24600

24800

25000

25200

25400

25600

25800

26000

26200

26400

26600

26800

27000

27200

27400

27600

27800

28000

28200

28400

28600

28800

29000

29200

29400

29600

29800

30000

30200

30400

30600

30800

31000

31200

31400

31600

31800

32000

32200

32400

32600

32800

33000

33200

33400

33600

33800

34000

34200

34400

34600

34800

35000

35200

35400

35600

35800

36000

36200

36400

36600

36800

37000

37200

37400

37600

37800

38000

38200

38400

38600

38800

39000

39200

39400

39600

39800

40000

40200

40400

40600

40800

41000

41200

41400

41600

41800

42000

42200

42400

42600

42800

43000

43200

43400

43600

43800

44000

44200

44400

44600

44800

45000

45200

45400

45600

45800

46000

46200

46400

46600

46800

47000

47200

47400

47600

47800

48000

48200

48400

48600

48800

49000

49200

49400

49600

49800

50000

50200

50400

50600

50800

51000

51200

51400

51600

51800

52000

52200

52400

52600

52800

53000

53200

53400

53600

53800

54000

54200

54400

54600

54800

55000

55200

55400

55600

55800

56000

56200

56400

56600

56800

57000

57200

57400

57600

57800

58000

58200

58400

58600

58800

59000

59200

59400

59600

59800

60000

60200

60400

60600

60800

61000

61200

61400

61600

61800

62000

62200

62400

62600

62800

63000

63200


63400

63600

63800</

State of Idaho
Department of Water Resources
Attachment to Water Right Field Exam
97-7370

This map depicts the IRRIGATION place of use boundary for this water right at the time of this approval and is attached to the approval document solely for illustrative purposes.

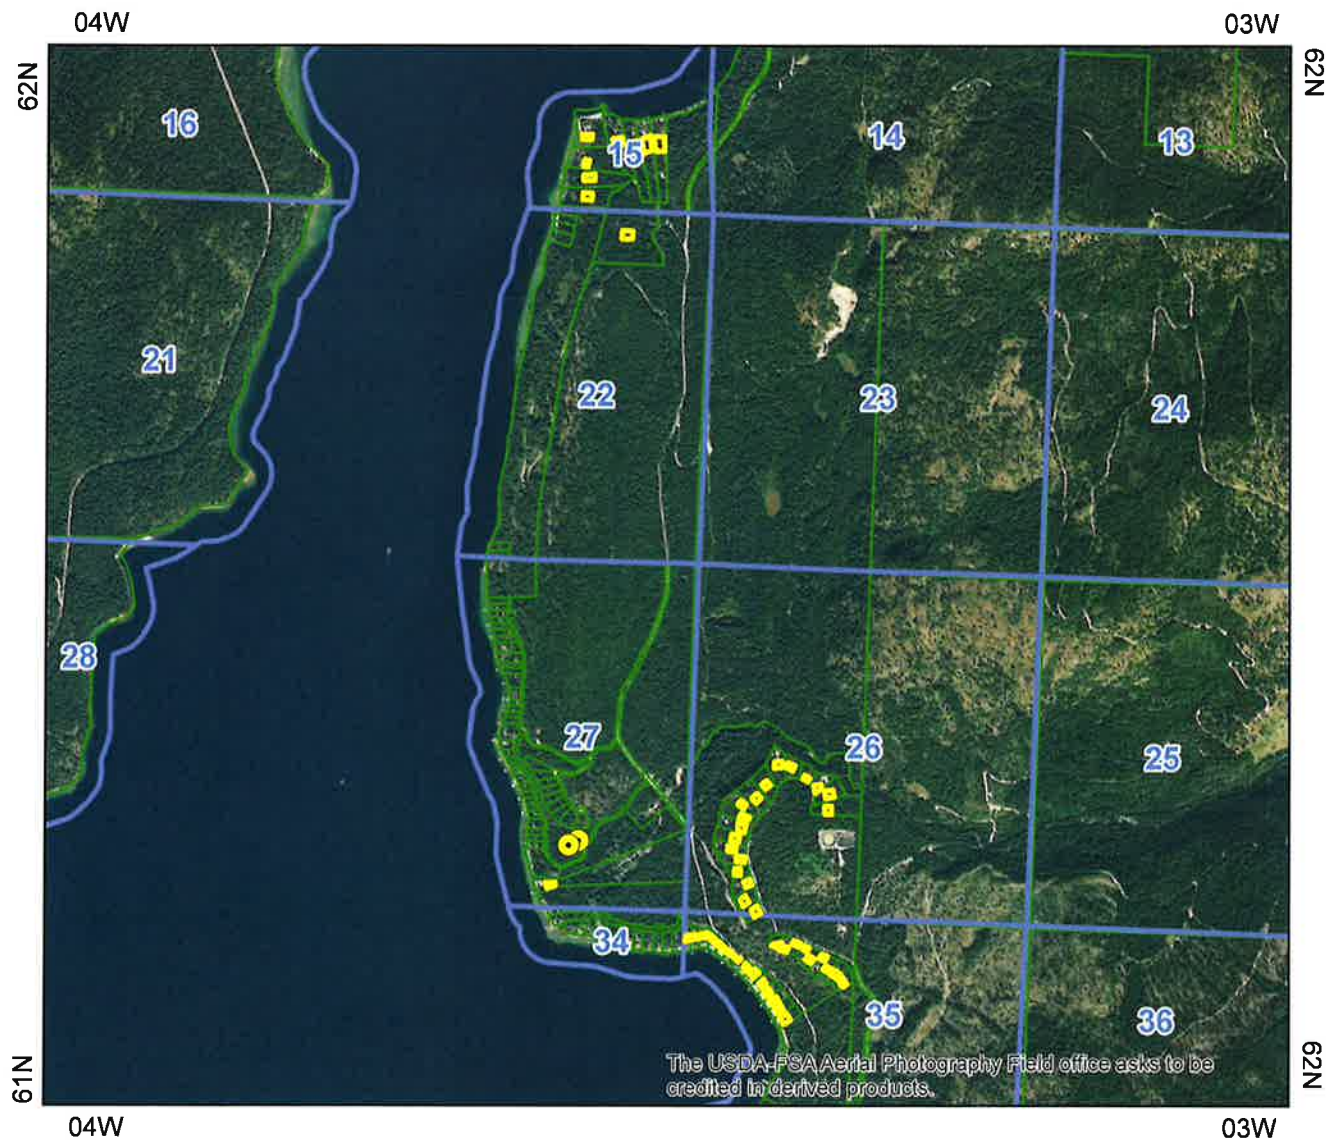

-  Point of Diversion
-  Place Of Use Boundary
-  PLS Sections
-  Taxlots

0 0.35 0.7 1.4 Miles

Tax parcel information provided by Bonner County.




97-07370

State of Idaho
Department of Water Resources

Attachment to Water Right Field Exam

97-7370

This map depicts the DOMESTIC place of use boundary for this water right at the time of this approval and is attached to the approval document solely for illustrative purposes.

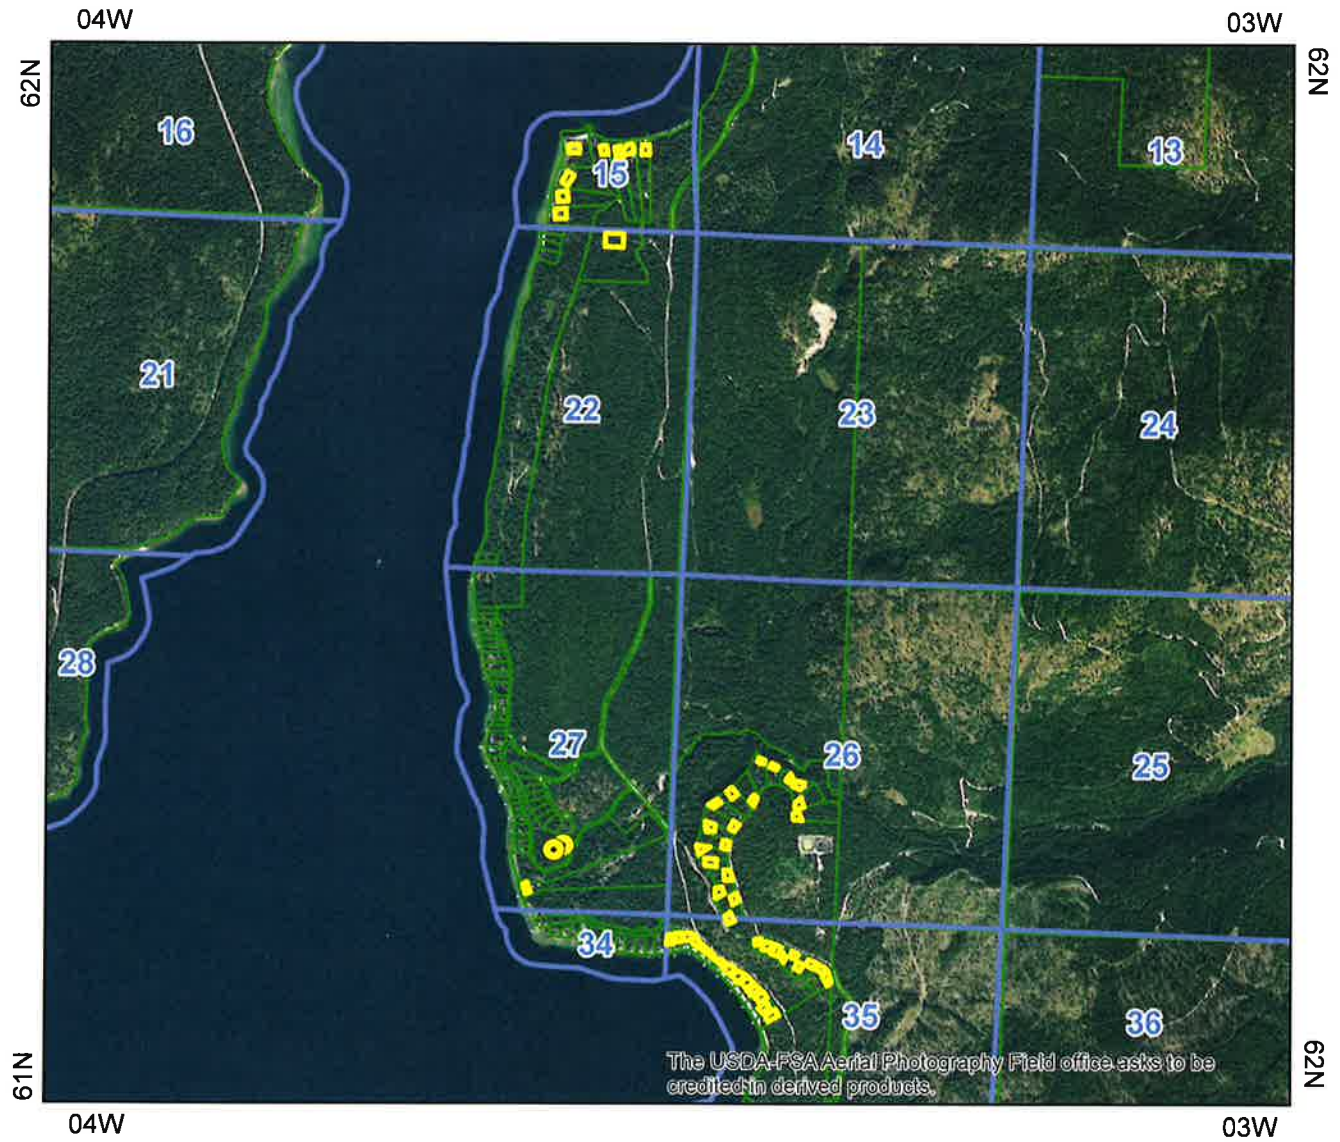

- Point of Diversion
- Place Of Use Boundary
- PLS Sections
- Taxlots

Tax parcel information provided by Bonner County.

97-07370



(HUCK BAY)
Huckleberry Bay Well 1
EØØØ572Ø Tag



HUCK BAY Well 1
Vault



HUCK BAY Well 2
Vault cover

97-Ø73 7Ø



HUCK BAY Well 2



HUCK BAY Well 3 Site



HUCK BAY Well 1 to
left rear of Pumphouse

97-07370



HUCK BAY Pump house
Controls



HUCK BAY Reservoir 1



HUCK BAY Reservoir
Overflow 1

97-07370

HUCK BAY Reservoir 2



↑HUCK BAY Reservoir
Overflow 2



← HUCK BAY Community
Center Kitchenette



← HUCK BAY Community CTR
Center / Fire Station
Exterior

97-07370



← HUCK BAY Firehouse
R Door Private Residence
Sign



← HUCK BAY POU
Typical Developed Lot



← HUCK BAY typical
POU Lot

97-07370

HUCK BAY Sandy Shores
Ridge
Stub-In 2



↑
HUCK BAY Sandy Shores
Ridge Stub-In



← HUCK BAY Sandy Shores
Ridge Lot Development 1



← HUCK BAY Sandy Shores
Ridge Lot Development 2

97-07370

15

14

Canoe Point Family Estates
3 Single Family 5 Acre Lots

8

LT2

LT1

Huckleberry Family Estates
1 Single Family 20 Acre Lot

0

Picnic/
Vista Area

LT2

Trag System
(typical)

LT3
22

23

LT4

Osprey Lake

D. Barbieri
1 Single Family 10 Acre Lot

97-7293

Trail System
(typical)

36

Sandy Shores
35 Single Family Lots

97-7243

LT2

Moose Lake

Picnic/
Vista Area

Tennis
Court

LT3
27

26

Point of
Diversion

Ridgeview Terrace
27 Single Family Lots

27

Huckleberry Waterrun Estates
3 Single Family 20 Acre Lots

+

Huckleberry Bay
14 Single Family Lots



14

97-87370

LT2

North of the Narrows Fire Station

Community
Fire Station

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Resources within 30 days after the completion or abandonment of the well.

[illegible]


1. IF AN OFFICIAL REQUESTS IF NECESSARY - FORWARD THE WHITE COPY TO THE DEPARTMENT

WELL DRILLER'S REPORT

State law requires that this report be filed with the Director, Department of Water Resources within 30 days after the completion or abandonment of the well.

NOV 25 1988

Department of Water Resources

1. WELL OWNER Name <u>Huckleberry Bay Co.</u> <u>West 201 North Rich Dr. Suite 180</u> <u>Spokane, Wash 99201</u> Owner's Permit No. <u>97-88-N-32</u>	7. WATER LEVEL Static water level <u>7'</u> feet below land surface. Flowing? ☐ Yes ☒ No G.P.M. flow _____ Artesian closed-in pressure _____ p.s.i. Controlled by: ☐ Valve ☐ Cap ☐ Plug Temperature <u>49</u> °F. Quality <u>good</u> Describe artesian or temperature zones below.																																																																
2. NATURE OF WORK ☒ New well ☐ Deepened ☐ Replacement ☐ Abandoned (describe abandonment procedures such as materials, plug depths, etc. in lithologic log)	8. WELL TEST DATA ☐ Pump ☒ Bailer ☐ Air ☐ Other _____ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Discharge G.P.M.</th> <th>Pumping Level</th> <th>Hours Pumped</th> </tr> </thead> <tbody> <tr> <td><u>30</u></td> <td><u>14' draw down</u></td> <td><u>1 hr.</u></td> </tr> </tbody> </table>	Discharge G.P.M.	Pumping Level	Hours Pumped	<u>30</u>	<u>14' draw down</u>	<u>1 hr.</u>																																																										
Discharge G.P.M.	Pumping Level	Hours Pumped																																																															
<u>30</u>	<u>14' draw down</u>	<u>1 hr.</u>																																																															
3. PROPOSED USE ☐ Domestic ☐ Irrigation ☒ Test ☐ Municipal ☐ Industrial ☐ Stock ☐ Waste Disposal or Injection ☐ Other _____ (specify type)	9. LITHOLOGIC LOG <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Bore Diam.</th> <th colspan="2">Depth</th> <th rowspan="2">Material</th> <th colspan="2">Water</th> </tr> <tr> <th>From</th> <th>To</th> <th>Yes</th> <th>No</th> </tr> </thead> <tbody> <tr> <td><u>8</u></td> <td><u>0</u></td> <td><u>1</u></td> <td><u>top soil</u></td> <td></td> <td>☒</td> </tr> <tr> <td><u>8</u></td> <td><u>1</u></td> <td><u>12</u></td> <td><u>granite sand-gravel</u></td> <td></td> <td>☒</td> </tr> <tr> <td><u>8</u></td> <td><u>12</u></td> <td><u>19</u></td> <td><u>granite sand-lts</u></td> <td></td> <td>☒</td> </tr> <tr> <td><u>6</u></td> <td><u>19</u></td> <td><u>72</u></td> <td><u>granite sand + gravel</u></td> <td></td> <td>☒</td> </tr> <tr> <td></td> <td><u>72</u></td> <td><u>76</u></td> <td><u>fine sand</u></td> <td></td> <td>☒</td> </tr> <tr> <td></td> <td><u>76</u></td> <td><u>82</u></td> <td><u>clay</u></td> <td></td> <td>☒</td> </tr> <tr> <td></td> <td><u>82</u></td> <td><u>90</u></td> <td><u>fine sand</u></td> <td></td> <td>☒</td> </tr> <tr> <td></td> <td><u>90</u></td> <td><u>150</u></td> <td><u>broken granite and clay</u></td> <td></td> <td>☒</td> </tr> <tr> <td></td> <td><u>150</u></td> <td></td> <td><u>hard granite</u></td> <td></td> <td></td> </tr> </tbody> </table>	Bore Diam.	Depth		Material	Water		From	To	Yes	No	<u>8</u>	<u>0</u>	<u>1</u>	<u>top soil</u>		☒	<u>8</u>	<u>1</u>	<u>12</u>	<u>granite sand-gravel</u>		☒	<u>8</u>	<u>12</u>	<u>19</u>	<u>granite sand-lts</u>		☒	<u>6</u>	<u>19</u>	<u>72</u>	<u>granite sand + gravel</u>		☒		<u>72</u>	<u>76</u>	<u>fine sand</u>		☒		<u>76</u>	<u>82</u>	<u>clay</u>		☒		<u>82</u>	<u>90</u>	<u>fine sand</u>		☒		<u>90</u>	<u>150</u>	<u>broken granite and clay</u>		☒		<u>150</u>		<u>hard granite</u>		
Bore Diam.	Depth		Material	Water																																																													
	From	To		Yes	No																																																												
<u>8</u>	<u>0</u>	<u>1</u>	<u>top soil</u>		☒																																																												
<u>8</u>	<u>1</u>	<u>12</u>	<u>granite sand-gravel</u>		☒																																																												
<u>8</u>	<u>12</u>	<u>19</u>	<u>granite sand-lts</u>		☒																																																												
<u>6</u>	<u>19</u>	<u>72</u>	<u>granite sand + gravel</u>		☒																																																												
	<u>72</u>	<u>76</u>	<u>fine sand</u>		☒																																																												
	<u>76</u>	<u>82</u>	<u>clay</u>		☒																																																												
	<u>82</u>	<u>90</u>	<u>fine sand</u>		☒																																																												
	<u>90</u>	<u>150</u>	<u>broken granite and clay</u>		☒																																																												
	<u>150</u>		<u>hard granite</u>																																																														
4. METHOD DRILLED ☒ Rotary ☒ Air ☐ Hydraulic ☐ Reverse rotary ☒ Cable ☐ Dug ☐ Other _____	10. Work started <u>10-17</u> finished <u>10-27-88</u>																																																																
5. WELL CONSTRUCTION Casing schedule: ☒ Steel ☐ Concrete ☐ Other _____ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Thickness</th> <th>Diameter</th> <th>From</th> <th>To</th> </tr> </thead> <tbody> <tr> <td><u>250</u> inches</td> <td><u>6</u> inches</td> <td><u>3.6</u> feet</td> <td><u>60</u> feet</td> </tr> <tr> <td>_____ inches</td> <td>_____ inches</td> <td>_____ feet</td> <td>_____ feet</td> </tr> <tr> <td>_____ inches</td> <td>_____ inches</td> <td>_____ feet</td> <td>_____ feet</td> </tr> <tr> <td>_____ inches</td> <td>_____ inches</td> <td>_____ feet</td> <td>_____ feet</td> </tr> </tbody> </table> Was casing drive shoe used? ☒ Yes ☐ No Was a packer or seal used? ☒ Yes ☐ No Perforated? ☐ Yes ☒ No How perforated? ☐ Factory ☐ Knife ☐ Torch Size of perforation _____ inches by _____ inches <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Number</th> <th>From</th> <th>To</th> </tr> </thead> <tbody> <tr> <td>_____ perforations</td> <td>_____ feet</td> <td>_____ feet</td> </tr> <tr> <td>_____ perforations</td> <td>_____ feet</td> <td>_____ feet</td> </tr> <tr> <td>_____ perforations</td> <td>_____ feet</td> <td>_____ feet</td> </tr> </tbody> </table> Well screen installed? ☒ Yes ☐ No Manufacturer's name <u>JOHANSON</u> Type <u>STAINLESS</u> Model No. _____ Diameter <u>6</u> Slot size <u>15</u> Set from <u>60</u> feet to <u>65</u> feet Diameter <u>6</u> Slot size <u>15</u> Set from <u>65</u> feet to <u>70</u> feet Gravel packed? ☐ Yes ☒ No Size of gravel _____ Placed from _____ feet to _____ feet Surface seal depth <u>18</u> Material used in seal: ☐ Cement grout ☒ Bentonite ☒ Puddling clay ☐ _____ Sealing procedure used: ☐ Slurry pit ☒ Temp. surface casing ☐ Overbore to seal depth Method of joining casing: ☐ Threaded ☒ Welded ☐ Solvent ☐ Weld ☐ Cemented between strata Describe access port _____	Thickness	Diameter	From	To	<u>250</u> inches	<u>6</u> inches	<u>3.6</u> feet	<u>60</u> feet	_____ inches	_____ inches	_____ feet	_____ feet	_____ inches	_____ inches	_____ feet	_____ feet	_____ inches	_____ inches	_____ feet	_____ feet	Number	From	To	_____ perforations	_____ feet	_____ feet	_____ perforations	_____ feet	_____ feet	_____ perforations	_____ feet	_____ feet	11. DRILLERS CERTIFICATION I/We certify that all minimum well construction standards were complied with at the time the rig was removed. Firm Name <u>Intermountain</u> Firm No. <u>252</u> <u>RT-1 Box 312 Priest River</u> Date <u>10-30-88</u> Address _____ Signed by (Firm Official) <u>Norman D. Huggins</u> and _____ (Operator) <u>Same</u>																																
Thickness	Diameter	From	To																																																														
<u>250</u> inches	<u>6</u> inches	<u>3.6</u> feet	<u>60</u> feet																																																														
_____ inches	_____ inches	_____ feet	_____ feet																																																														
_____ inches	_____ inches	_____ feet	_____ feet																																																														
_____ inches	_____ inches	_____ feet	_____ feet																																																														
Number	From	To																																																															
_____ perforations	_____ feet	_____ feet																																																															
_____ perforations	_____ feet	_____ feet																																																															
_____ perforations	_____ feet	_____ feet																																																															
6. LOCATION OF WELL Sketch map location <u>must</u> agree with written location.  Subdivision Name _____ Lot No. _____ Block No. _____ County <u>Bonner</u> <u>NE 1/4 SW 1/4 Sec. 27, T. 62 N, R. 4 E</u>	RECEIVED NOV 7 1988 NORTHERN REGION IDWR																																																																



RECEIVED

OCT 04 2018

IDWR / NORTH

October 3, 2018

Idaho Department of Water Resources, Northern Region
7600 N. Mineral Drive, Suite 100
Coeur d'Alene, ID 83815-7763

Attn: Mr. Doug Jones, Regional Manager
Subj: Huckleberry Bay Company
Ref: Water Right Address Correction

Dear Mr. Jones:

Through this letter the Huckleberry Bay Company requests the address listed on Water Right License 97-07293 and Water Right Permit 97-07370 be changed from W. 201 North River Dr. #100, Spokane, WA 99201 to our current address of 818 West Riverside, Suite 300, Spokane WA 99201. We understand that IDWR is currently processing our request to modify each water right such that all three wells are listed as acceptable points of diversion. We are hopeful that this address update can be completed through the same process. Please contact us if you need anything in addition.

Sincerely,

Huckleberry Bay Company

By

Thomas M. Barbieri, President

pc: Kevin Koesel, James A. Sewell & Associates, 600 4th Street West, Newport WA 99156
file

Maxey, Shaun

From: Hersley, Jean
Sent: Wednesday, September 19, 2018 8:29 AM
To: Maxey, Shaun
Subject: RE: Request for check of vault on Permit 97-07370
Attachments: 20180919092551.pdf

I rescanned the page and attached it. It says section 3.

*Jean Hersley
Idaho Dept Water Resources
Technical Records Specialist II
208-287-4942*

From: Maxey, Shaun
Sent: Wednesday, September 19, 2018 9:12 AM
To: Hersley, Jean <Jean.Hersley@idwr.idaho.gov>
Subject: Request for check of vault on Permit 97-07370

Jean:

I need to ask a favor on the file for Water Right Permit 97-07370 (Huckleberry Bay Co.)

The attachment is one of the pages from the 2001 Field Exam and is scanned as page 17 of 51 in the back file. The faint text at the bottom is a note I made on a photocopy of the Field Exam.

Could you check the highlighted portion of the attachment (Field Exam) in the vault and see if there is some whiteout or something else obscuring the text highlighted in yellow? I believe this is supposed to read as Section 34 instead of '...3.-

....

Thanks,

Shaun

Shaun M. Maxey
Sr. Water Resource Agent
Idaho Department of Water Resources, Northern Region
7600 N Mineral DR Suite 100
Coeur d'Alene, ID 83815-7763
Phone (208) 762.2816 /2800
Fax (208) 762.2819
www.idwr.idaho.gov



GOODALE &
BARBIERI
COMPANIES

COMMERCIAL &
RESIDENTIAL
REAL ESTATE SERVICES

RETAIL REAL ESTATE
SERVICES
McCarthy Management &
Development Co.

HOSPITALITY
Cavanagh's Inns
M&M Catering

ENTERTAINMENT
G&B Select-a-Seat
G&B Presents

RECREATION
Huckleberry Bay Co.

FOOD PROCESSING
Broadview Dairy

March 22, 1996

Cindy Zimmerman
Idaho Department of Water Resources
1301 N. Orchard St.
Boise, ID. 83706

RE: Huckleberry Bay Company water permit

Dear Ms. Zimmerman

Please find enclosed the requested water delivery system plans for Canoe Point, Huckleberry Family Estates, and Huckleberry Waterfront Estates subdivisions.

While there was a separate plan done for Canoe Point, Huckleberry Family Estates consists of 1 lot and access is provided off of the Canoe Point extension. A separate plan for Huckleberry Waterfront Estates which consists of 3 lots was not designed either and access is provided from the Sandy Shores Addition which is enclosed.

If you have any questions or need other information please feel free to call.

Sincerely,

Huckleberry Bay Company

Jim Osburn

RECORDED

MAR 29 1996

97-07370