

**IN THE DISTRICT COURT OF THE FIFTH JUDICIAL DISTRICT OF THE
STATE OF IDAHO, IN AND FOR THE COUNTY OF TWIN FALLS**

**IN RE THE GENERAL ADJUDICATION
OF RIGHTS TO THE USE OF WATER FROM
THE COEUR D'ALENE-SPOKANE RIVER
BASIN WATER SYSTEM**

CIVIL CASE NUMBER: 49576

ID Number: _____

Date Received: _____

Receipt No: _____

Amount: _____ By: _____

**NOTICE OF CLAIM TO A WATER RIGHT
ACQUIRED UNDER STATE LAW**

**For domestic and/or stockwater purposes where
daily use is less than 13,000 gallons per day**

Please type or print clearly

1. Name of claimant(s) Andrew J. Gibson and Roberta K. Gibson Phone 208 245-2577
Mailing address 119 Taylor Lane, St. Maries, Idaho ZIP 83861

Street or Box City State
2. Date of priority (only one (1) per claim) 09/09/1990

Month/Day/Year (yyyy)
3. Source of water supply (check one) Ground Water (x) or Other () (a) _____
which is tributary to (b) _____
4. Location of point of diversion is: Township 46N, Range 2W, Section 20,
_____ 1/4 of SW 1/4, or Govt. Lot _____, B.M., County of Benewah
Parcel (PIN) no. RP 46N02W20495B A
Additional points of diversion, if any: NA
If available, GPS coordinates NA
5. Description of diverting works (wells, pumps, spring boxes, pipelines, etc.), including the dates of any changes or enlargements in use, the dimensions of the diversion works as constructed and as enlarged and the depth of each well.
Domestic well drilled 09/09/1990. See attached well driller's report.
6. Water is claimed for the following: (Limited to domestic and/or stockwater uses. See page 1 of the instructions.)

	Month/Day	Month/Day	cfs (X) AFY ()
For <u>domestic</u> purposes from <u>01/01</u> to <u>12/31</u> amount <u>.04 cfs</u>			
For _____ purposes from _____ to _____ amount _____			
7. Total quantity claimed 0.04 cfs cfs (x) or AFY ()
8. Non-irrigation uses; describe fully (e.g. Domestic: give number of households served if single ownership; Stockwater: type and number of livestock, etc.): Well serves one household.

9. Location of place of use is: Township 46N, Range 2W, Section 20, 1/4 of SW 1/4,
or Govt. Lot _____, B.M., Parcel (PIN) no. (if different than shown in Item 4) RP 46N02W20495B A

For (check one) ☒ Domestic ☐ Stock ☐ Domestic and Stock ☐

Additional places of use, if any: N/A

10. In which county(ies) are lands listed above as place of use located? Benewah

11. Do you own the property listed above as place of use? Yes ☒ No ☐

If your answer is no, describe in remarks below the authority you have to claim this water right.

12. Describe any other water rights used at the same place and for the same purposes as described above.

_____ or None ☒

13. Remarks:

See attached well driller's report, map, deed and Benewah County parcel master inquiry.

14. Basis of claim (check one) Beneficial Use ☒ Posted Notice ☐ License ☐ Permit ☐ Decree ☐

Court _____ Decree Date _____ Plaintiff v. Defendant _____

If applicable, provide IDWR water right number _____

15. Signature(s)


a. By signing below, I/we acknowledge that I/we have received, read and understand the form entitled "How you will receive notices in the Coeur d'Alene-Spokane River Basin Adjudication".

b. I/We do ☐ do not ☒ wish to receive and pay a small annual fee for monthly copies of the docket sheet.

Number of attachments: 4

For individuals:

I/We do solemnly swear or affirm under penalty of perjury that the statements contained in the foregoing document are true and correct.

Signature of claimant(s)  Date: 10/23/2015
Date: 10/28/2015

For organizations:

I do solemnly swear or affirm under penalty of perjury that I am

_____ of _____,
Title Organization

that I have signed the foregoing document in the space below as

_____ of _____,
Title Organization


and that the statements contained in the foregoing document are true and correct.

Signature of authorized agent _____ Date _____


Title and organization _____

16. Notice of appearance:

Notice is hereby given that I, Mariah R. Dunham, will be acting as attorney at law of behalf of the claimant signing above, and that all notices required by law to be mailed by the director to the claimant signing above shall be mailed to me at the address listed below.

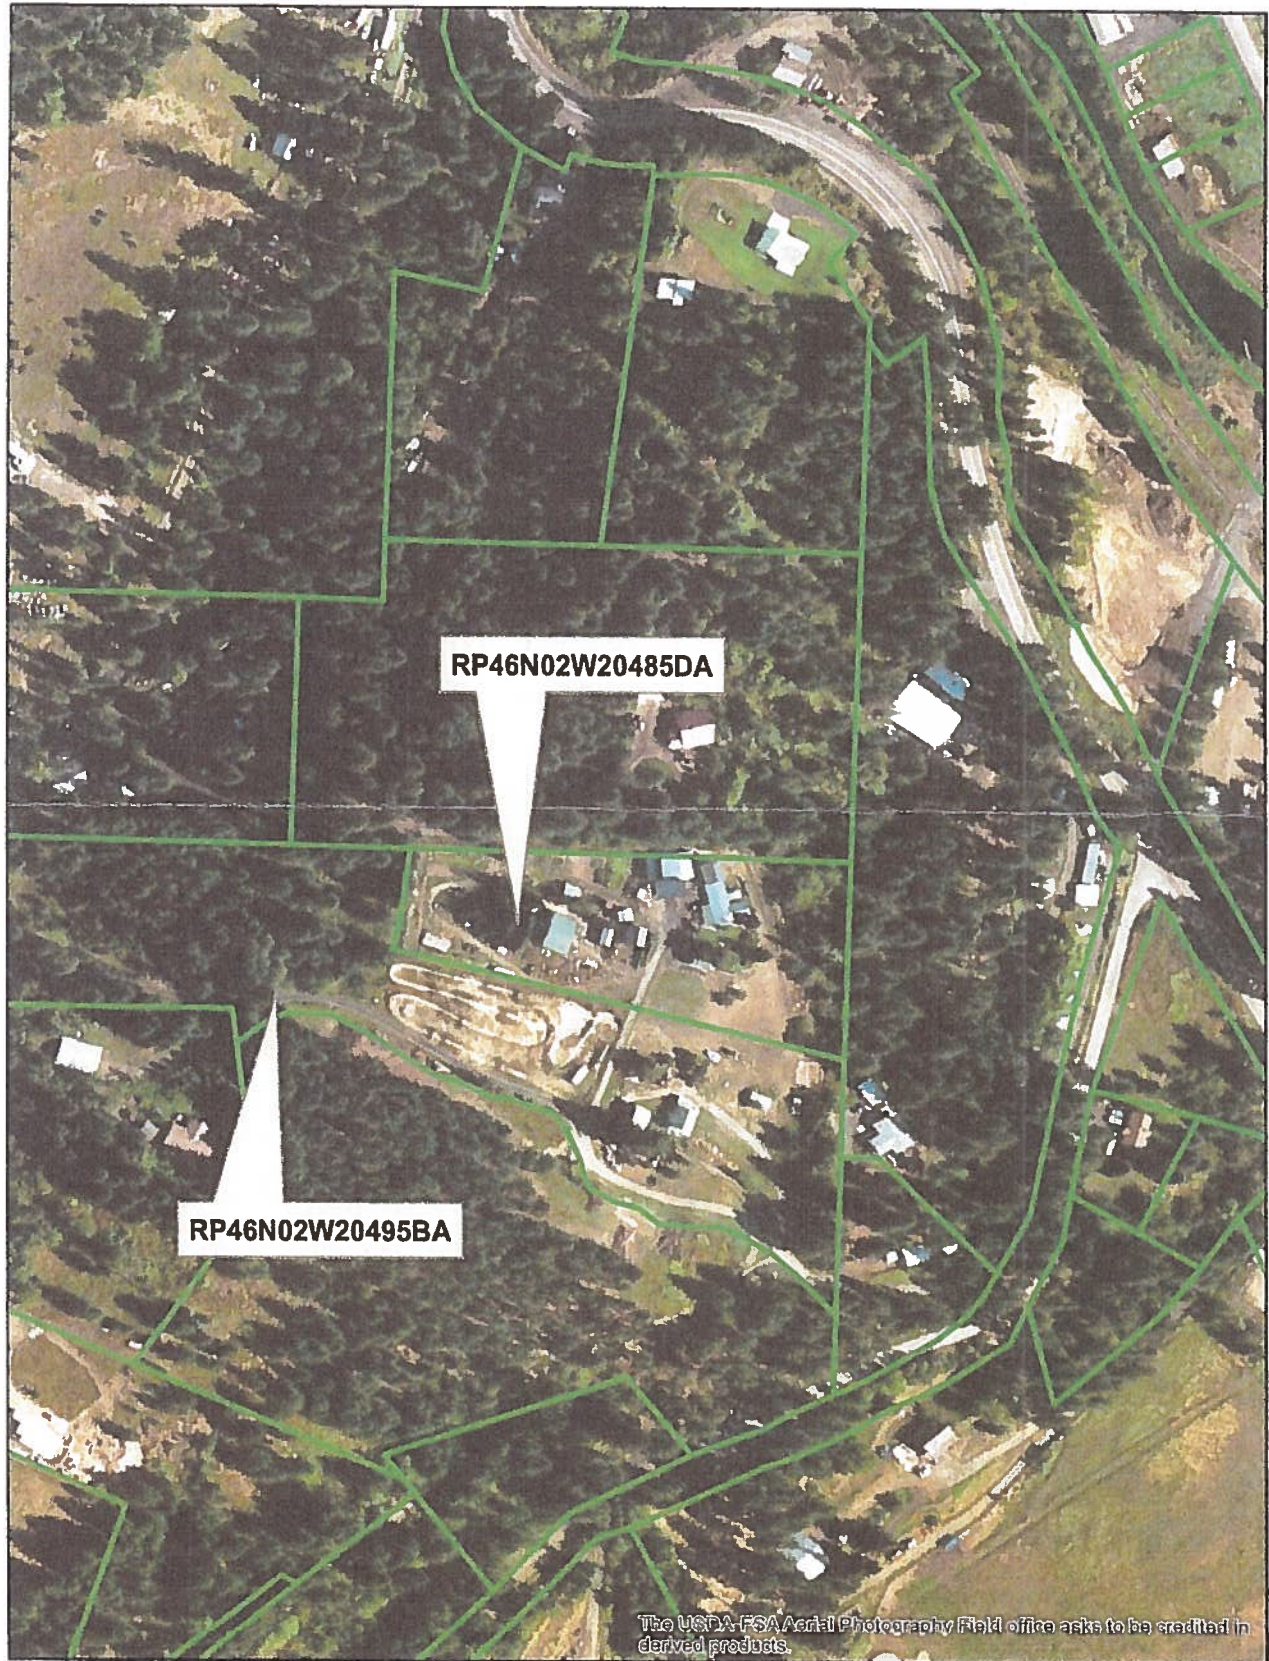
Signature  Date 11-3-2015

Address Morris & Wolff, P.A., 722 Main Avenue, St. Maries, Idaho 83861

STATE OF IDAHO
DEPARTMENT OF WATER RESOURCES
WELL DRILLER'S REPORTState law requires that this report be filed with the Director, Department of Water Resources
within 30 days after the completion or abandonment of the well.USE TYPEWRITER OR
BALLPOINT PEN

1. WELL OWNER Name <u>Dorothy Taylor</u> Address <u>St. Maries, Idaho</u> Owner's Permit No. <u>92-90-N-2</u>	7. WATER LEVEL Static water level <u>180</u> feet below land surface. Flowing? ☐ Yes ☒ No G.P.M. flow _____ Artesian closed-in pressure _____ p.s.i. Controlled by: ☐ Valve ☐ Cap ☐ Plug Temperature _____ of. Quality _____ Describe artesian or temperature zones below.																																																										
2. NATURE OF WORK ☒ New well ☐ Deepened ☐ Replacement ☐ Well diameter increase ☐ Abandoned (describe abandonment procedures such as materials, plug depths, etc. in lithologic log)	8. WELL TEST DATA ☐ Pump ☐ Bailor ☒ AIT ☐ Other _____ <table border="1"><thead><tr><th>Discharge G.P.M.</th><th>Pumping Level</th><th>Hours Pumped</th></tr></thead><tbody><tr><td>Est. 40+ GPM'S</td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></tbody></table>	Discharge G.P.M.	Pumping Level	Hours Pumped	Est. 40+ GPM'S																																																						
Discharge G.P.M.	Pumping Level	Hours Pumped																																																									
Est. 40+ GPM'S																																																											
3. PROPOSED USE ☒ Domestic ☐ Irrigation ☐ Test ☐ Municipal ☐ Industrial ☐ Stock ☐ Waste Disposal or Injection ☐ Other _____ (specify type)	9. LITHOLOGIC LOG <table border="1"><thead><tr><th rowspan="2">Bore Diam.</th><th colspan="2">Depth</th><th rowspan="2">Material</th><th colspan="2">Water</th></tr><tr><th>From</th><th>To</th><th>Yes</th><th>No</th></tr></thead><tbody><tr><td>8"</td><td>0</td><td>8</td><td>Overburden, Top Soil</td><td></td><td>X</td></tr><tr><td>"</td><td>8</td><td>40</td><td>Clay Brown</td><td></td><td></td></tr><tr><td>"</td><td>40</td><td>65</td><td>Clay with Boulders</td><td></td><td></td></tr><tr><td>"</td><td>65</td><td>195</td><td>Clay</td><td></td><td></td></tr><tr><td>"</td><td>195</td><td>220</td><td>Broken Basalt</td><td></td><td></td></tr><tr><td>"</td><td>220</td><td>235</td><td>Clay w/sand</td><td></td><td></td></tr><tr><td>"</td><td>235</td><td>270</td><td>Soft Broken Basalt</td><td></td><td>X</td></tr><tr><td>6"</td><td>258</td><td>270</td><td>"</td><td></td><td></td></tr></tbody></table>	Bore Diam.	Depth		Material	Water		From	To	Yes	No	8"	0	8	Overburden, Top Soil		X	"	8	40	Clay Brown			"	40	65	Clay with Boulders			"	65	195	Clay			"	195	220	Broken Basalt			"	220	235	Clay w/sand			"	235	270	Soft Broken Basalt		X	6"	258	270	"		
Bore Diam.	Depth		Material	Water																																																							
	From	To		Yes	No																																																						
8"	0	8	Overburden, Top Soil		X																																																						
"	8	40	Clay Brown																																																								
"	40	65	Clay with Boulders																																																								
"	65	195	Clay																																																								
"	195	220	Broken Basalt																																																								
"	220	235	Clay w/sand																																																								
"	235	270	Soft Broken Basalt		X																																																						
6"	258	270	"																																																								
4. METHOD DRILLED ☒ Rotary ☒ Air ☐ Hydraulic ☐ Reverse rotary ☐ Cable ☐ Dug ☐ Other _____	10. Work started <u>3-7-90</u> finished <u>3-9-90</u>																																																										
5. WELL CONSTRUCTION Casing schedule: ☒ Steel ☐ Concrete ☐ Other _____ Thickness _____ inches Diameter _____ inches From _____ feet To _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet _____ inches _____ inches _____ feet _____ feet Was casing drive shoe used? ☒ Yes ☐ No Was a packer or seal used? ☐ Yes ☒ No Perforated? ☒ Yes ☐ No How perforated? ☐ Factory ☐ Knife ☒ Torch ☐ Gun Size of perforation <u>7/16</u> inches by <u>6</u> inches _____ Number _____ From _____ To _____ _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet _____ perforations _____ feet _____ feet Well screen installed? ☐ Yes ☒ No Manufacturer's name _____ Type _____ Model No. _____ Diameter _____ Slot size _____ Set from _____ feet to _____ feet Diameter _____ Slot size _____ Set from _____ feet to _____ feet Gravel packed? ☐ Yes ☒ No ☐ Size of gravel _____ Placed from _____ feet to _____ feet Surface seal depth <u>18+</u> Material used in seal: ☐ Cement grout ☒ Bentonite ☐ Puddling clay ☐ _____ Sealing procedure used: ☐ Slurry pit ☒ Temp. surface casing ☒ Overbore to seal depth Method of joining casing: ☐ Threaded ☒ Welded ☐ Solvent Weld _____ ☐ Cemented between strata Describe access port _____	11. DRILLERS CERTIFICATION <u>OR</u> I/We certify that all minimum well construction standards were complied with at the time the rig was removed. Firm Name <u>H. D. Well Service</u> Firm No. <u>448</u> Address <u>582 West</u> <u>Hayden Ave</u> Date <u>3-10-90</u> <u>Hayden Idaho</u> Signed by (Firm Official) <u>John M. Brown</u> and (Operator) <u>Scott M. Brown</u>																																																										
6. LOCATION OF WELL Sketch map location must agree with written location. Subdivision Name _____ Lot No. _____ Block No. _____ County <u>Benewah</u> NE ☐ SW ☐ Sec. <u>20</u> , T. <u>46</u> N ☒ S ☐ R. <u>2</u> E ☐ W ☒																																																											

92- XXXXX GIBSON BENEWAH PIN



The USDA-FSA Aerial Photography Field office asks to be credited in derived products.

Recording requested by:
Andrew P. Doman
Christensen & Doman, P.C.
907 Main Avenue
St. Maries, ID 83861

When recorded return to:
Andrew P. Doman
Christensen & Doman, P.C.
907 Main Avenue
St. Maries, ID 83861

247438

RECEIVED

2007 JUL 13 PM 12:41
18:00

BENEWAH COUNTY
J. MICHELE REYNOLDS, CLERK
Quinn Schults - Deputy
To Christensen and Doman
907 Main Ave
St. Maries ID 83861

CORRECTION WARRANTY DEED

THIS CORRECTION WARRANTY DEED, made this 13 day of July, 2007, between WILLIAM A. TAYLOR and MARILYN J. TAYLOR, husband and wife, of 177 Taylor Lane, City of St. Maries, County of Benewah, State of Idaho, herein referred to as "Grantors"; and ANDREW J. GIBSON and ROBERTA K. GIBSON, husband and wife, of 118 Washington Avenue, City of St. Maries, County of Benewah, State of Idaho herein referred to as "Grantees".

WITNESSETH:

That Grantors, for good and valuable consideration, the receipt whereof is hereby acknowledged, have granted, bargained and sold, and do by these presents grant, bargain, sell, convey, and confirm unto Grantees, and their heirs and assigns forever, all the following described real estate situated in Benewah County, State of Idaho, to-wit:

A part of the SW1/4 of section 20, Township 46 North, Range 2 West, Boise Meridian, Benewah County, Idaho: more particularly described as follows:

COMMENCING at the Center 1/4 section corner of said section 20, monumented with an iron rod, 3/8 inch diameter, no cap, from which the Center-West 1/16 section corner of said section, monumented with an iron rod, 1/2 inch diameter, no cap, bears South 89°34'36" West, 1328.11 feet (of record as South 89°34'14" West, 1327.96 feet and South 89°27'40" West, 1327.41 feet) distant;

thence South 0°01'54" East, 274.83 feet (of record as 274.90 feet and South 0°06'45" East, 274.90 feet) along the East line of said SW1/4, to an iron rod, 1/2 inch diameter, with a plastic cap marked PLS 703;

thence continuing South 0°11'34" East, 21.10 feet (of record as South 0°06'45" East) along said East line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766, the POINT OF BEGINNING;

thence continuing South 0°11'34" East, 311.05 feet (of record as South 0°06'45" East) along said East line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 82.62 feet along the arc of a 159.40 foot non-tangent radius curve right, through a central angle of 29°41'56", said curve having a chord bearing North

20-46-2
SW

55°47'16" West, 81.70 feet distant, and leaving said East line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 40°56'49 West, 12.67 feet (of record as North 40°57'40" West, 12.67 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 75.63 feet along the arc of a 120.52 foot radius curve left, through a central angle of 35°57'25", said curve having a chord bearing North 58°55'32" West, 74.40 feet distant, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 76°54'05" West, 39.61 feet (of record as North 76°54'56" West, 39.61 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 79°00'21" West, 79.65 feet (of record as North 79°01'12" West, 79.65 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 68°52'09" West, 59.73 feet (of record as North 68°53'00" West, 59.73 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 54.75 feet along the arc of a 65.58 foot radius curve right, through a central angle of 47°49'49", said curve having a chord bearing North 44°57'22" West, 53.17 feet distant, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 21°02'22" West, 29.57 feet (of record as North 21°03'13" West, 29.57 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 52.05 feet along the arc of a 59.14 foot radius curve left, through a central angle of 50°25'51", said curve having a chord bearing North 46°15'26" West, 50.39 feet distant, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 71°28'20" West, 65.11 feet (of record as North 71°29'11" West, 65.11 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 67°33'04" West, 95.66 feet (of record as North 67°33'55" West, 95.66 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 62°49'44" West, 106.97 feet (of record as North 62°50'35" West, 106.97 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 92.66 feet along the arc of a 250.00 foot radius curve left, through a central angle of 21°14'10", said curve having a chord bearing North 73°26'47" West, 92.13 feet distant, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 111.89 feet along the arc of a 100.00 feet radius curve left, through a central angle of 64°06'20", said curve having a chord bearing South 63°53'01" West, 106.14 feet distant, to an iron rod, 5/8 inch diameter, with a plastic cap marked PLS 832;

thence North 9°08'38" West, 50.87 feet (of record as North 9°12'57" West, 50.77 feet) to a steel fence post;

thence South 89°31'52" West, 494.56 feet (of record as South 89°34'14" West, 494.30 feet) to an iron rod, 5/8 inch diameter, with a plastic cap marked PLS 832;

thence South 17°41'32" West, 322.75 feet (of record as South 17°46'00" West, 323.22 feet) to an iron rod, 5/8 inch diameter, with a plastic cap marked PLS 832;

thence North 69°49'49" West, 95.28 feet (of record as North 69°36'43" West, 95.00 feet and North 69°38' West) to an iron rod, 5/8 inch diameter, with a plastic cap marked PLS 832;

thence North 41°51'06" West, 666.19 feet (of record as North 41°51'43" West, 666.12 feet and North 41°53' West, 659.33 feet) to a point on the North line of said SW1/4, said point monumented with an iron rod, 5/8 inch diameter, with a plastic cap marked PLS 832;

thence North 89°37'30" East, 630.89 feet (of record as North 89°37'18" East, 630.85 feet) along said North line, to the aforementioned Center-West 1/16 section corner;

thence continuing North 89°28'13" East, 563.51 feet (of record as North 89°27'45" East, 566.32 feet, North 89°34'14" East and North 89°27'40" East) along said North line, to a drill steel;

thence continuing North 89°39'19" East, 152.00 feet (of record as North 89°27'45" East, North 89°34'14" East and North 89°27'40" East) along said North line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence South 6°00'00" West, 123.58 feet, and leaving said North line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence South 13°00'00" West, 44.03 feet to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence South 78°45'00" East, 648.09 feet to the POINT OF BEGINNING.

This parcel contains 11.1 acres, more or less.

SUBJECT to and together with a Mutual Easement for Ingress, Egress and Utility Purposes, by and between WILLIAM A. TAYLOR and MARILYN J. TAYLOR, husband and wife, DALE HUMPHREY and DARCY HUMPHREY, husband and wife, and FRANK KIRKELLA and CONNIE KIRKELLA, husband and wife, mutual Grantors and Grantees, dated on or about April 30, 2007, and recorded as Instrument Number 246518, in the Office of the Recorder of Deeds, Benewah County, Idaho. Said easement shall be more particularly identified in a Record of Survey to be recorded in the Office of the Recorder of Deeds, Benewah County, Idaho; and

SUBJECT to an easement for ingress, egress and utility purposes lying over, under and across real property located in the SW1/4 of Section 20, Township 46 North, Range 2 West, Boise Meridian, Benewah County, Idaho, said easement more particularly described as follows:

COMMENCING at the Center 1/4 section corner of said section 20, monumented with an iron rod, 3/8 inch diameter, no cap, from which the Center-West 1/16 section corner of said section, monumented with an iron rod, 1/2 inch diameter, no cap, bears South 89°34'36" West, 1328.11 feet (of record as South 89°34'14" West, 1327.96 feet and South 89°27'40" West, 1327.41 feet) distant;

thence South 0°01'54" East, 274.83 feet (of record as 274.90 feet and South 0°06'45" East, 274.90 feet) along the East line of said SW1/4, to an iron rod, 1/2 inch diameter, with a plastic cap marked PLS 703;

thence continuing South 0°11'34" East, 21.10 feet (of record as South 0°06'45" East) along said East line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence continuing South 0°11'34" East, 311.05 feet (of record as South 0°06'45" East) along said East line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 82.62 feet along the arc of a 159.40 foot non-tangent radius curve right, through a central angle of 29°41'56", said curve having a chord bearing North 55°47'16" West, 81.70 feet distant, and leaving said East line, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 40°56'49" West, 12.67 feet (of record as North 40°57'40" West, 12.67 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 75.63 feet along the arc of a 120.52 foot radius curve left, through a central angle of 35°57'25", said curve having a chord bearing North 58°55'32" West, 74.40 feet distant, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 76°54'05" West, 39.61 feet (of record as North 76°54'56" West, 39.61 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 79°00'21" West, 79.65 feet (of record as North 79°01'12" West, 79.65 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 68°52'09" West, 59.73 feet (of record as North 68°53'00" West, 59.73 feet) to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence 54.75 feet along the arc of a 65.58 foot radius curve right, through a central angle of 47°49'49", said curve having a chord bearing North 44°57'22" West, 53.17 feet distant, to an iron rod, 30 inches long, 5/8 inch diameter, with a plastic cap marked PLS 6766;

thence North 21°02'22" West, 11.50 feet (of record as North 21°03'13" West) to the POINT OF BEGINNING;

thence North 20°20'00" East, 180.59 feet to the POINT OF TERMINATION.

The sidelines of this easement are to lengthen or shorten, so as to terminate at the respective property lines.

Said easement shall be 20 feet in width, lying 10 feet on each side of the above described centerline of said road. The easement granted herein shall be constructed and maintained in good repair by the Grantors, at their sole cost and expense. The grant of easement shall run with the land and shall be binding upon and inure to the benefit of the Grantors, their respective heirs, successors or assigns; and

SUBJECT to and together with any other easements, rights, restrictions or reservations of record or view.


TOGETHER with all and singular the tenements, easements, hereditaments and appurtenances thereunto belonging or in any wise appertaining, the reversion and reversions, remainder and remainders, rents, issues, and profits thereof, including any interest therein which Grantors may hereafter acquire.

TO HAVE AND TO HOLD all and singular the premises, together with the appurtenances, unto Grantees and to their heirs and assigns forever.

Grantors, for themselves, their heirs and assigns, do hereby covenant, warrant and shall defend the quiet and peaceable possession of said premises by the Grantees, their heirs and assigns forever against the lawful claims of all persons.

THIS Correction Warranty Deed is being executed in order to correct the reservation of an easement in favor of the Grantors, previously described in Instrument No. 246523, Benewah County records, dated April 30, 2007. That Warranty Deed incorrectly provided for transfer of the easement to the Grantees herein, rather than reserving the easement in favor of the Grantors.

IN WITNESS WHEREOF, Grantors have hereunto set their hand and seal on the day and year first above written.


WILLIAM A. TAYLOR



MARILYN J. TAYLOR

Grantors

STATE OF IDAHO)
 : ss.
County of Benewah)

On this 31 day of July, 2007, before me, the undersigned, a Notary Public in and for the said State, personally appeared WILLIAM A. TAYLOR and MARILYN J. TAYLOR, husband and wife, known to me to be the persons whose names are subscribed to the above and foregoing CORRECTION WARRANTY DEED, and acknowledged to me that they executed the same.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal the date first above written.



Connie I. Port

Notary Public in and for: Idaho

Residing at: St. Marie

Commission expires: 10-20-2010

1/08/15

PAO410 - PARCEL MASTER INQUIRY

15:58:30

PARCEL: RP 46N02W20495B A

F9=MS

F14=HO

F19=SP

LEGAL DESCRIPTION

GIBSON, ANDREW J
GIBSON, ROBERTA KS20 T46N R2W
TAX #1516
(PT SW, PT TAX #495B & 964)ProVal Area Number 1CODE AREA 26-0000 OWNER CD PARC TYPE LOC CODE 1EFFDATE 1012008 EXPDATE PREV PARCEL RP46N02W20495BT119 TAYLOR LANEST MARIES ID 83861119 TAYLOR LANE 83861

CAT	RY	QUANTITY	UN	VALUE	HO MRKT	HO EXMP	CB MRKT	OTHER
12	2011	10100	AC	28280				
12	2011	1000	AC	19000	19000	9500		
32	2011			200				
34	2011			49350	49350	24675		
TOTALS		11100		96830	68350	34175		

ENTER NEXT PARCEL NUMBER RP A

FKeys:

F3=Exit

F6=Nm

F7=LG

F8=CT

F13=TM

F18=HS

F20=SrcH