

STATE OF IDAHO
DEPARTMENT OF WATER RESOURCES
BENEFICIAL USE FIELD REPORT

A. GENERAL INFORMATION

Permit No: 72-16746

Exam Date: 8/11/2011

1. Current Owner: STATE OF IDAHO
DEPT OF FISH & GAME
600 S WALNUT
BOISE ID 83707
(208)334-3700
2. Accompanied by: Benny Walker (IDWR)
Phone No:
Address:
Relationship to Permit Holder:

3. **SOURCE**

SQUAW CREEK

TRIBUTARY

SALMON RIVER

B. OVERLAP REVIEW

1. Other water rights with the same place of use: None
2. Other water rights with the same point of diversion: 72-133

C. DIVERSION AND DELIVERY SYSTEM1. **LOCATION OF POINT(S) OF DIVERSION:**

SQUAW CREEK

SW1/4NE1/4SW1/4

Sec. 16, Twp 11N, Rge 17E, B.M.

CUSTER County

Method of Determination: Field observation and IDWR spatial data point (A0011348)

2.

PLACE OF USE:

FISH PROPAGATION

Tw	Rge	Sec	NE				NW				SW				SE				Totals
			<u>NE</u>	<u>NW</u>	<u>SW</u>	<u>SE</u>	<u>NE</u>	<u>NW</u>	<u>SW</u>	<u>SE</u>	<u>NE</u>	<u>NW</u>	<u>SW</u>	<u>SE</u>	<u>NE</u>	<u>NW</u>	<u>SW</u>	<u>SE</u>	
11N	17E	16								X									

Method of Determination: Field observation, and IDWR GIS

3. ☒ Delivery System Diagram Attached (required). Indicate all major components and distances between components. Indicate weir size/pipe as applicable.
- ☒ Map Attached Showing Location(s) of point(s) of diversion and place(s) of use (required). Scale must be 1:24,000 or greater.
- ☒ Aerial Photo Attached (required for irrigation of 10+ acres).
- ☒ Photo of Diversion and System Attached

4.

<u>Well or Diversion ID No.*</u>	<u>Motor Make</u>	<u>Hp</u>	<u>Motor Serial No.</u>	<u>Pump Make</u>	<u>Pump Serial No. or Discharge Size</u>
----------------------------------	-------------------	-----------	-------------------------	------------------	--

N/A

*Code to correspond with No. on map and aerial photo

D. FLOW MEASUREMENTS

1.

<u>Measurement Equipment</u>	<u>Type</u>	<u>Make</u>	<u>Model No.</u>	<u>Serial No.</u>	<u>Size</u>	<u>Calib. Date</u>
------------------------------	-------------	-------------	------------------	-------------------	-------------	--------------------

None taken

2. Measurements: Diameter of orifice was measured at 4 inches and at the time of the field exam, no water was flowing through the fish screen structure. However, 23.0 inches of head above the center of the orifice to the high water mark on the fish screen structure was measured.

E. FLOW CALCULATIONS

_____Additional Computation Sheets Attached

Measured Method:

Discharge from a tank through an orifice (see attached 8/24/11 memo for formula and orifice coefficient)

$$Q = C_d A_o (2gh)^{1/2} \quad \text{where } C_d = 0.67 \text{ coefficient of discharge for round edged orifice}$$

$$A_o = \text{Area of orifice opening}$$

$$g = 32.2 \text{ ft per second}^2$$

$$h = \text{measured head above center of orifice opening (in feet)}$$

$$\text{Orifice is a 4 inch diameter hole so } A_o = \pi r^2 = \pi (2 \text{ inch})^2 = 12.566 \text{ inch}^2 = .087 \text{ ft}^2$$

$$h \text{ was measured at 23.0 inches (to high water mark)} = 1.917 \text{ feet}$$

$$Q = (0.67)(0.087)[2(32.2)(1.917)]^{1/2}$$

$$Q = 0.65 \text{ cfs}$$

F. VOLUME CALCULATIONS

1. Volume Calculations for Irrigation:

$$V_{I.R.} = (\text{Acres Irrigated}) \times (\text{Irrigation Requirement}) = \text{N/A}$$

$$V_{D.R.} = [\text{Diversion Rate (cfs)}] \times (\text{Days in Irrigation season}) \times 1.9835 = \text{N/A}$$

$$V = \text{Smaller of } V_{I.R.} \text{ and } V_{D.R.} = \text{N/A}$$

2. Volume Calculations for Other Uses:

$$V = [\text{Diversion Rate (cfs)}] \times (\text{Days in Irrigation season}) \times 1.9835 = (0.65 \text{ cfs})(214 \text{ days})(1.9835) = 275.9 \text{ afa}$$

G. NARRATIVE/REMARKS/COMMENTS

Permit 72-16746 was permitted for the diversion of up to 0.80 cfs from Squaw Creek for use in a fish screen to flush fish back to the creek that would otherwise be trapped between the point of diversion and the fish screen. During the exam it was observed that water was not being diverted through the fish screen structure. However, 23.0 inches of head above the center of the 4 inch diameter orifice to the high water mark on the fish screen structure was measured indicating that water had been utilized by the fish screen bypass in the past. Note that permit 72-16746 was permitted with the wrong irrigation season (04/01 to 11/01), when the standard for the area is actually 4/01 to 10/31. It is recommended that the standard irrigation season be licensed for the period of use. The standard irrigation season of 214 days was utilized in the annual volume calculations.

Have conditions of permit approval been met? ☒ Yes ☐ No

H. RECOMMENDATIONS**1. Recommended Amounts**

<u>BENEFICIAL USE</u>	<u>PERIOD OF USE</u>	<u>DIVERSION RATE</u>	<u>ANNUAL VOLUME</u>
FISH PROPAGATION	04/01 to 10/31	0.650 CFS	275.90 AF
<u>Totals:</u>		0.650 CFS	275.90 AF


2. Recommended Amendments

☐ Change P.D. as reflected above ☐ Add P.D. as reflected above ☒ None

☐ Change P.U. as reflected above ☐ Add P.U. as reflected above ☐ Other


I. AUTHENTICATION

Field Examiner's Name  Date 11/4/2011

Reviewer  Date 12/6/2011

72-16746 System Diagram

(DIAGRAM NOT TO SCALE)

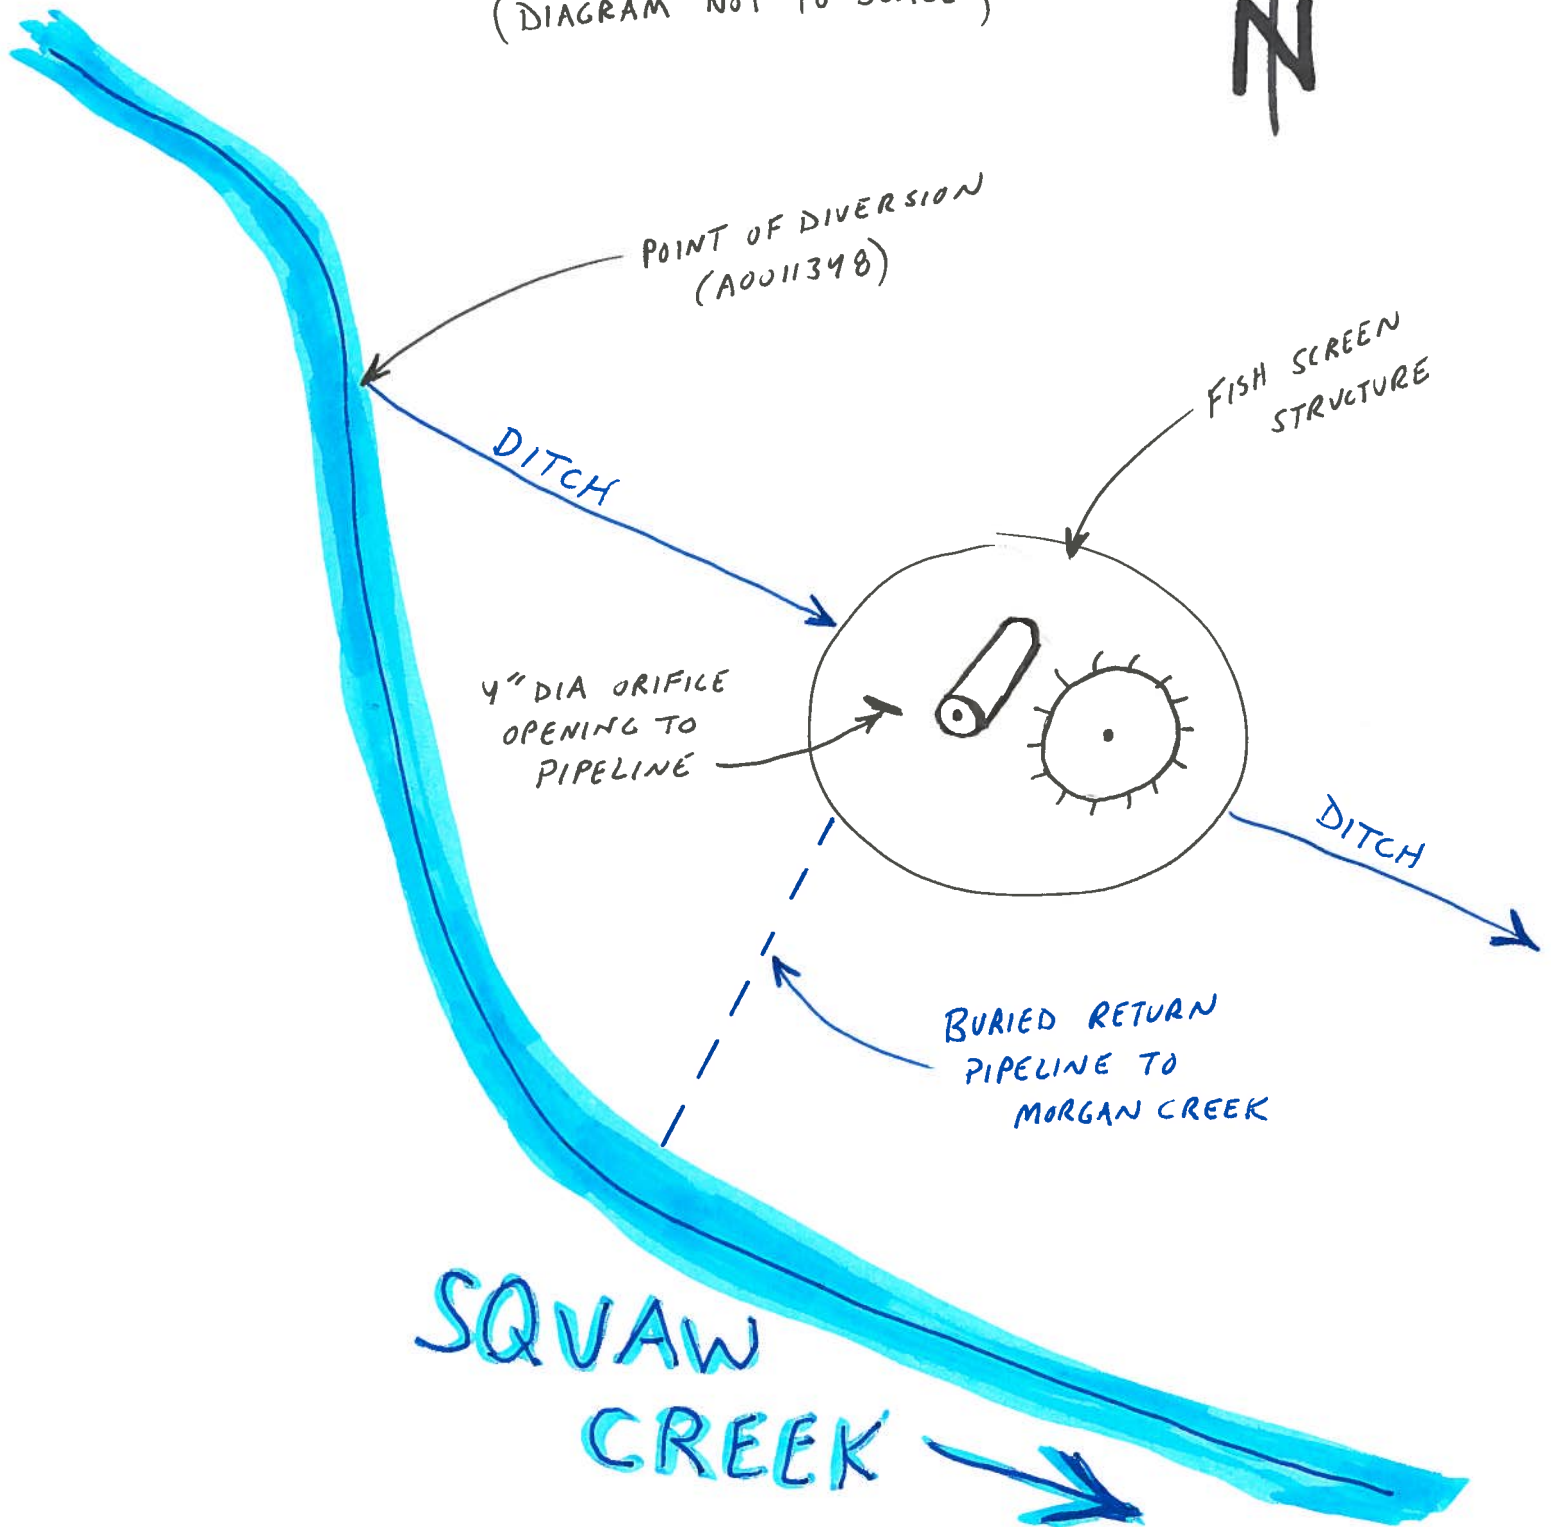

Photos for 72-16746 Field Exam



ABOVE: View of Point of diversion for 72-16746. Note picture taken on different date and obtained from \\A006\Water Measurement\Water Districts by Basin\WD 170 Upper Salmon\Photos\DIVERSION INVENTORY\BASIN 72 TRIBS\Squaw Creek\Sqc5

BELOW: View of place of use for 72-16746 on August 11, 2011 (date of licensing exam).



72-16746

div

≈ 3:45 pm

2"
3"
4"

dia orifice

) all less than 1" = from edge

high water mark ≈ 25" from bottom
use ≈ 23"

↖ 1.817'

POB A0011348
tag #

$Q = 0.65 \text{ cfs}$

$V = 275.9 \text{ cfs}$

POV ≈ 40 yards
DS of POB

| Squaw Creek | Sgc5

A0011348

72-16746 Field Exam Map

