

STATE OF IDAHO
DEPARTMENT OF WATER RESOURCES

REQUEST FOR EXTENSION OF TIME
TO PROVIDE ADDITIONAL TIME IN WHICH TO SUBMIT PROOF OF
BENEFICIAL USE FOR A WATER RIGHT PERMIT

RECEIVED
SEP 15 2004
DEPARTMENT OF WATER RESOURCES

The Idaho Department of Water Resources will consider this form as a request that the permit holder(s) be granted an additional period of time under the provisions of Section 42-204, Idaho Code in which to complete development of a water right.

Permit No. 78-7396

Name(s) of Permit Holder: Kings Pines Estates Inc

Mailing Address: P.O. Box 704, McCall, ID 83638

Date Proof is Due: October 1, 2004 Telephone No. 208-634-7533

Describe what work has been completed toward the development of this water right:
(This must be filled out! If no work has been completed, show "none".)

To date, King's Pines Estates has constructed two water supply wells (North Well and South Well) and installed the water distribution piping to serve Kings Pines Estates Subdivision III. One of the wells (South Well) has been equipped with a pump, and is currently serving water to lots in King's Pines Estates III. Copies of well logs and the performance curve for the pump are attached. Costs for the water supply and distribution system that have been installed to date are more than \$200,000.

The permit holder(s) has been unable to complete the remainder of the work for the following reasons:

The second well pump and the King's Pines Estates IV distribution piping are scheduled for installation in the fall of 2004. At that time, all of the lots proposed to be served under this permit will have access to the water system. Homes will be constructed resulting in use of water for domestic and irrigation purposes based on the schedules and needs of each lot owner.

Permit holder(s) request an extension to October 1, 2009, XXXX.

FEE: \$50.00

Frank C. Brown
(Signature)*

*If other than permit holder, Power of Attorney must be supplied.

ACTION OF THE DEPARTMENT OF WATER RESOURCES

IT IS HEREBY ORDERED that the above request for extension of time be

APPROVED and the time within which to submit proof of beneficial use is extended to October 1, 2009.


Signed this 29th day of December, 19 2004.

Gary Spackman
GARY SPACKMAN

FLOW RANGE: 30 -220 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

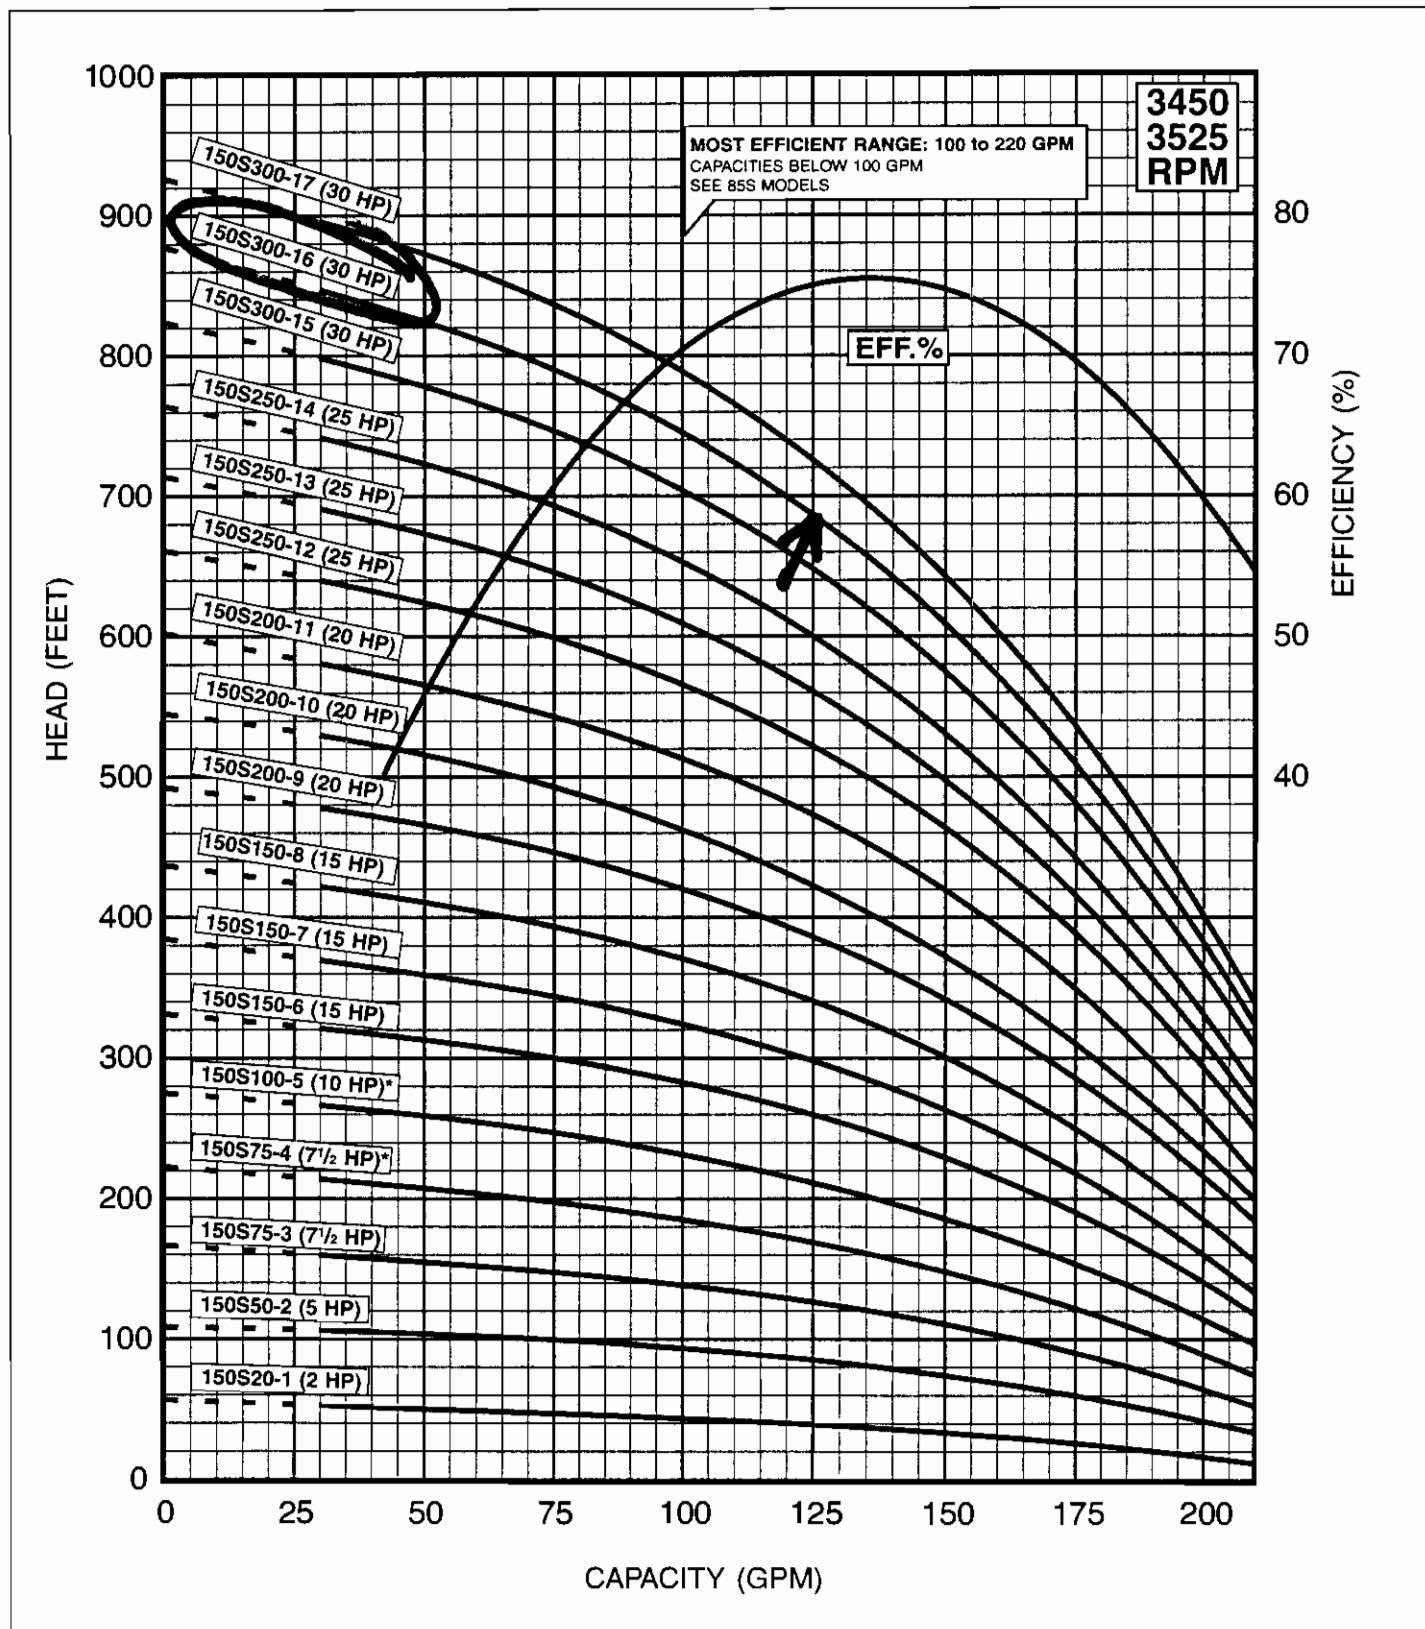

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

4" MOTOR STANDARD, 2-10 HP/3450 RPM

6" MOTOR STANDARD, 7.5-60 HP/3450 RPM.

8" MOTOR STANDARD, 75 HP/3525 RPM.


* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 5 ft. min. submergence.

FLOW RANGE: 160 -320 GPM

OUTLET SIZE: 3" NPT

NOMINAL DIA. 6"

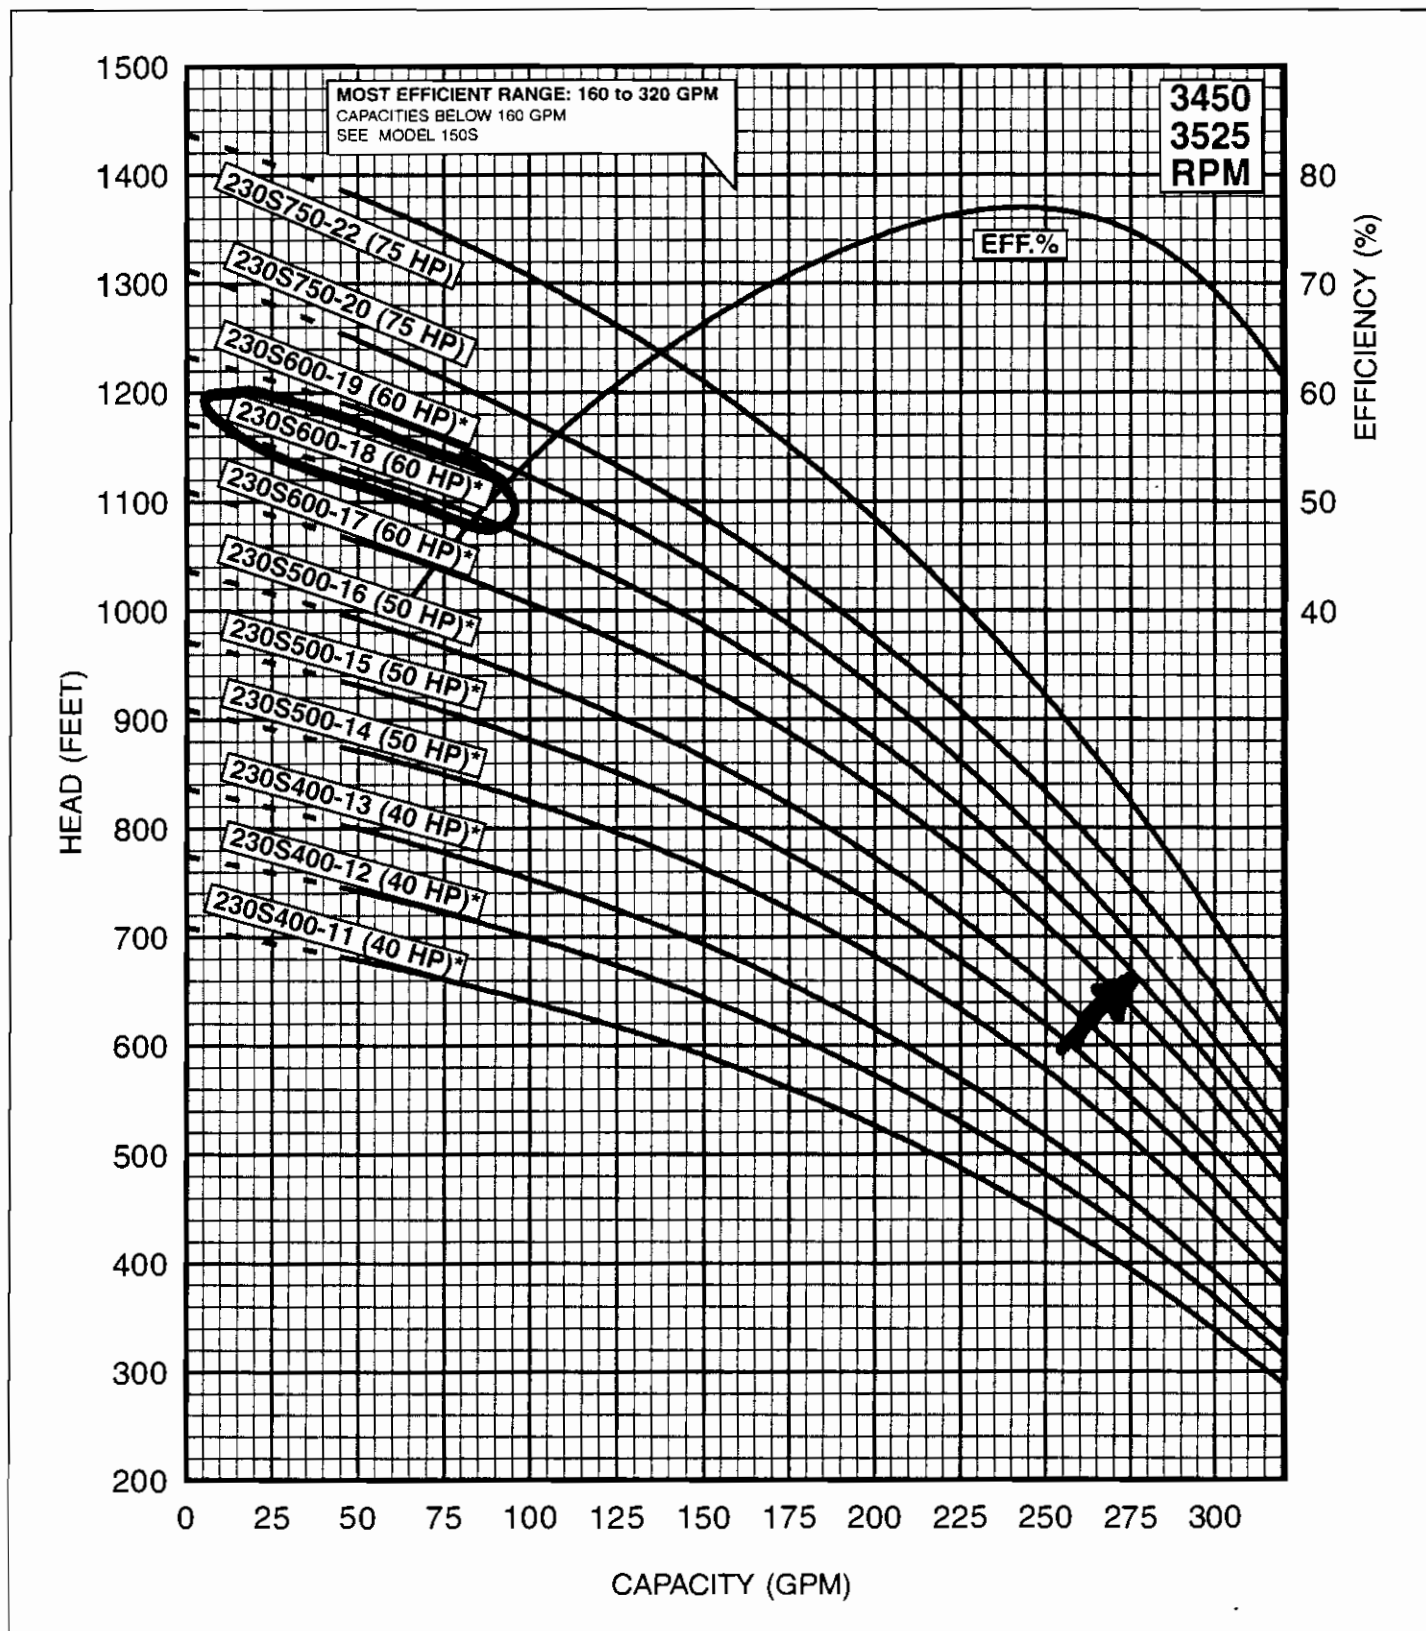

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

4" MOTOR STANDARD, 7.5 HP/3450 RPM

6" MOTOR STANDARD, 10-60 HP/3450 RPM.

8" MOTOR STANDARD, 75 HP/3525 RPM.

* Alternate motor sizes available.

Performance conforms to ISO 9906 Annex A
@ 8 ft. min. submergence.

WELL DRILLER'S REPORT

59869

Office Use Only

Inspected by

Twp. Rge. Sec.

1/4 1/4 1/4

Lat. Long.

Air Flowing Artesian

1. WELL TAG NO. D 0012235

DRILLING PERMIT NO. 65-99-1-801

Other IDWR No.

2. OWNER:

Name KINGS PINES ESTATES, INCAddress P.O. Box 704City MCCOLL State ID Zip 83638

3. LOCATION OF WELL by legal description:

Sketch map location must agree with written location.

N	
X	
E	
S	

Twp. 18 North ☒ or South ☐
Rge. 2 East ☒ or West ☐
Sec. 1 1/4 SW 1/4 NW 1/4
Gov't Lot _____ County Adams
Lat. _____ Long. _____
Address of Well Site Fish Lake Rd
(Whitefield Lane) City MCCOLL
(Give at least name of road - Distance to Road or Landmark)

Li. Bk. Sub. Name Kings Pines Estates

4. USE:

☐ Domestic ☐ Municipal ☐ Monitor ☐ Irrigation
☐ Thermal ☐ Injection ☐ Other

5. TYPE OF WORK check all that apply (Replacement etc.)

☒ New Well ☐ Modify ☐ Abandonment ☐ Other

6. DRILL METHOD

☒ Air Rotary ☐ Cable ☐ Mud Rotary ☐ Other

7. SEALING PROCEDURES

SEAL/FILTER PACK			AMOUNT		METHOD
Material	From	To	Sacks or Pounds		
<u>Bentonite</u>	<u>6</u>	<u>143</u>	<u>192 lbs</u>		<u>Pour</u>

Was drive shoe used? ☒ Y ☐ N Shoe Depth(s) 146.25Was drive shoe seal tested? ☐ Y ☒ N How?

8. CASING/LINER:

Diameter	From	To	Gauge	Material	Casing	Liner	Welded	Threaded
<u>8 7/8</u>	<u>6.5</u>	<u>146</u>	<u>322</u>	<u>Steel</u>	☒	☐	☒	☐
<u>6 7/8</u>	<u>9</u>	<u>350</u>	<u>21</u>	<u>PVC</u>	☐	☒	☐	☒
					☐	☐	☐	☐

Length of Headpipe _____ Length of Tailpipe _____

9. PERFORATIONS/SCREENS

Perforations

Method

Screens

Screen Type

From	To	Slot Size	Number	Diameter	Material
<u>10</u>	<u>293</u>	<u>1/8x3</u>	<u>180</u>	<u>6 7/8</u>	<u>PVC</u>
<u>293</u>	<u>350</u>	<u>60x12</u>	<u>R</u>	<u>6 7/8</u>	<u>PVC</u>
<u>293</u>	<u>350</u>	<u>1/8x3</u>	<u>480</u>	<u>6 7/8</u>	<u>PVC</u>

Casing	Liner
☐	☒
☐	☒
☐	☒

10. STATIC WATER LEVEL OR ARTESIAN PRESSURE:

153 ft. below ground Artesian pressure RECEIVEDDepth flow 153 ft. Describe access port or

control devices:

DEC 29 1999

FORWARD WATER RESOURCES
WESTERN REGION WATER RESOURCES

Department of Water Resources

11. WELL TESTS:

☐ Pump ☐ Bailor☒ Air ☐ Flowing Artesian

Yield gal./min.	Drawdown	Pumping Level	Time
<u>250-300</u>	<u>1-1.5</u>	<u>350</u>	<u>10 hrs</u>
<u>190</u>			

Water Temp. 60 L Bottom hole temp. 60 LWater Quality test or comments: SLIGHTLY SALTY when down 171Depth first Water Encounter 224

12. LITHOLOGIC LOG: (Describe repairs or abandonment)

Bore Dia.	From	To	Remarks: Lithology, Water Quality & Temperature	Y	N
16	0	3	Loose Rock & Soil		X
16	3	8	Loose Rock		X
15	8	11	Loose Rock		X
15	11	19	Boulders		X
15	19	22	Loose Broken Rock		X
15	22	24	Boulder		X
15	24	30	Rock & Clay		X
	30	38.5	Hard Basalt		X
	38.5	39.5	Fractured Basalt		X
	39.5	63	Hard BLK BSlt		X
15	63	66	SLIGHTLY Fract BLK BSlt		X
	66	71	Brown BLK yellow clay		X
	71	75	Hard BLK BSlt		X
15	75	83	Fract or Soft BSlt		X
	83	93	Fract BSlt		X
	93	96	Hard BSlt		X
15	96	130	SLIGHTLY Fract BSlt		X
11	130	138	Semi Hard BSlt		X
11	138	139	Fractured BSlt		X
11	139	150	Hard BSlt		X
	150	151	Fractured BSlt		X
8.5	151	161	Hard BSlt		X
	161	171	Broken BLK Rusty BSlt	1	X
	171	243	Hard BLK Basalt		X
	243	254	Fract Brn BSlt	3-5	X
	254	257	Semi Hard BLK BSlt		X
8.5	257	279	Hard BLK BSlt		X
2.75	279	286	Hard BLK BSlt		X
	286	289	Hard BLK BSlt	4	X
	289	300	Hard BLK BSlt		X
	300	341	SLIGHTLY Fractured		X
	341	342	Hard BLK BSlt		X
	342	348	Fractured BLK BSlt	20	X

Completed Depth 475 (Measurable)
Date: Started 9-19-99 Completed 10-14-99

13. DRILLER'S CERTIFICATION

I/We certify that all minimum well construction standards were complied with at the time the rig was removed.

Company Name RDD, INC Firm No. 589Firm Official Pat Dow Date 11-14-99Driller or Operator _____ Date NOV 24 1999

(Sign once if Firm Official & Operator)

WATER RESOURCES
WESTERN REGION

☒ Air ☐ Flowing Artesian

Department of Water Resources FORWARD WHITE PAPER TO WATER RESOURCES
WESTERN REGION

WATER RESOURCES
WESTERN REGION

Inspected by

Two Roe Sec

$$\frac{1}{4} \quad \frac{1}{4} \quad \frac{1}{4}$$

Lat: : Long: :

☒ Air ☐ Flowing Artesian

Running level	Time
---------------	------

FORWARD WHITE COPY TO WATER RESOURCES