



State of Idaho

DEPARTMENT OF WATER RESOURCES

Western Region • 2735 Airport Way • Boise, Idaho 83705-5082

Phone: (208) 334-2190 • Fax: (208) 334-2348 • Website:

www.idwr.idaho.gov

C.L. "BUTCH" OTTER
Governor

GARY SPACKMAN
Director

September 3, 2013

To: Pine Creek Water Users

**RE: Controllable-lockable Diversion Works and Measurement Device Order
Pine Creek and Tributaries**

Dear Water User:

Attached is a *Controllable Diversion Works and Measurement Device Order* that is being sent to all water right holders. A watermaster report summary is enclosed, that outlines the water rights from Pine Creek and upstream tributaries for your reference.


As you are aware, the Weiser River Watermaster is responsible for the regulation /delivery of the creek water rights. Currently, the lack diversion structures and measurement devices forces the Watermaster to make water deliveries by visual flow estimation. This can result in delivery inequities and non-efficient use of the resource. Bottom line: proper measurement and diversion works are required for the Watermaster to perform her duties.

Enclosed are excerpts from the Water Measurement Book published by the University of Idaho. The book outlines various weir and flume designs that may be applicable to your diversion situation. Included are design parameters, installation instructions, and flow rate conversion charts for each design. The entire book can be found on our website: www.idwr.idaho.gov under the water measurement heading.

Water users that have numerous diversions may want to consider consolidation to minimize costs for new works. If you need technical assistance in developing a structure design, the Natural Resource Conservation Service (NRCS) in Weiser may provide technical or design assistance for water structures, phone 549-4252. Local irrigation supply businesses also have staff available to provide technical assistance and needed hardware.

Should you have questions, please contact me at the Western Regional Office, phone 34-2190.

Sincerely,



John Westra, Manager

Enclosures: order, wr. summaries, measurement book excerpts
Cc: Weiser River Watermaster; NRCS, Weiser

**BEFORE THE DEPARTMENT OF WATER RESOURCES
OF THE STATE OF IDAHO**

IN THE MATTER OF WATERMASTER)	<i>PRELIMINARY ORDER</i>
REGULATION OF WATER RIGHTS ON)	<i>REQUIRING CONTROLLABLE</i>
PINE CREEK AND TRIBUTARIES)	<i>DIVERSION WORKS AND</i>
_____)	<i>MEASURING DEVICES</i>

FINDINGS OF FACT

1. Pine Creek and upstream tributaries in Adams County, Idaho are part of the Weiser River Water District #67. The Water District Watermaster is responsible for water delivery and regulation of the natural flow water rights associated with the creek and tributaries..
2. As natural flows decrease junior priority date water rights are curtailed to prevent injury to senior priority rights.
3. There have been allegations/complaints from water users regarding the distribution of water. Water users are tampering with diversion gate settings made by the Watermaster.
4. Measurement devices and controllable- lockable diversion works are lacking on the creek and tributary diversions. The watermaster is allocating water deliveries based on visual flow estimation.
5. The watermaster cannot effectively deliver/administer the creek water rights in the absence of measurement devices and controllable-lockable diversion works.

CONCLUSIONS

1. IC§42-701 states in part:
(1) The appropriator or users of any public waters of the state of Idaho shall maintain to the satisfaction of the director of the Department of Water Resources suitable headgates and controlling works at the point where the water is delivered.....Each such appropriator shall construct and maintain, when required by the director of the Department of Water Resources, a rating flume or other measuring device at such point most practical in such canal ditch, wellhead or pipeline for the purpose of assisting the watermaster.....(3) Any appropriator or user of the public water of the state of Idaho that neglects or refuses to construct or maintain such headgates, controlling works, or measuring devices, or has not executed an agreement in lieu of a measuring device as provided in subsection (2) of this section upon receiving ten (10) days notice from the director within which to begin and diligently pursue to completion of the construction or installation of the required device or devices.....the director may order the duly qualified and acting watermaster of the water district to shut off and refuse to deliver at the point of diversion, the water owned by such appropriator or user.

2. The Idaho Department of Water Resources Director (Director) is authorized to supervise the distribution of water rights in a water district. Water rights are to be distributed base on priority date, ref. Idaho Code (IC) §42-602.

3. Failure to compete the work within the time set should warrant a notice of violation for each diversion point and/or measuring device point not in compliance with the requirements of the water district. Civil penalties should accrue starting from the time set for completion and may be levied up to \$150.00 per day for each day of the continuing violation, ref. IC§ 42-1701B.

4 Domestic and stockwater uses defined under IC§ 42-111 and IC§42-1401A where the diversion is not to exceed 13, 000 gallons per day are exempt from measurement requirements.

ORDER

The following is hereby **ORDERED**:

1. Controllable-lockable diversion works and measurement devices shall be installed on all utilized points of diversion described by water rights describing Pine Creek and upstream creek tributaries as sources. The deadline for such installation is **June 1, 2014**.

2. Controllable diversion works and measurement devices shall be subject to the approval by the Department of Water Resources and the Weiser Water District #67 Watermaster. Identification and inspection of diversions will occur on or about **May 1, 2014**. A GPS location will be established to confirm each diversion.

3. The Watermaster shall refuse/deny delivery of water to any water right not demonstrating an approved controllable-lockable diversion works and measuring device.


4. Failure to install an approved controllable diversion works and measurement device by June 1, 2014 may warrant a "Notice of Violation" from the Department of Water Resources for each point of diversion not in compliance. Civil penalties pursuant to IC 42-1701B will commence from June 2, 2014 (up to \$150 fine per day per violation).

5. This Order does not apply to domestic and stockwater uses defined under IC§42-111 and IC§42-1401A where the diversion is not to exceed 13, 000 gallons per day.

6. The Order applies only to diversions located on Pine Creek and upstream creek tributaries. This Order is not applicable to points of diversion on ditches, lateral ditches, shared re-diversions, or field headgates.

7. The Watermaster will deliver/administer natural flow water rights by priority date pursuant to IC Title 42, Chapters 6 & 7 and authorized water right parameters.

Dated this 3rd day of September 2013



John Westra, Western Regional Manager

Bulletin No. 552
February 1976

WATER MEASUREMENT

Dorrell C. Larsen


COOPERATIVE EXTENSION SERVICE



University of Idaho

College of Agriculture

Reprinted 1992 with permission
from the University of Idaho



SPONSORED BY

U.S. BUREAU OF RECLAMATION
IDAHO WATER USERS ASSOCIATION
IDAHO DEPARTMENT OF WATER RESOURCES

Acknowledgments

The author gratefully acknowledges the contributions to this publication made by Allan S. Humphreys and A. R. Robinson, Agricultural Engineers with the Agricultural Research Service, USDA; L. R. Swarner, Agricultural Engineer, Bureau of Reclamation, and D. W. Fitzsimmons, Head, Department of Agricultural Engineering, University of Idaho.

The University of Idaho College of Agriculture Bulletin No. 552 has been reprinted to provide a general reference of water measurement devices commonly used in Idaho and to provide supplemental material for a water measurement video sponsored jointly by the US Bureau of Reclamation, the Idaho Department of Water Resources and the Idaho Water Users Association. Excerpts from other publications have been added for several measuring structures which are shown in the video but not covered in the University of Idaho Bulletin.

Copies of the video, "Let's Measure Up", may be obtained through the Idaho Water Users Association. The sponsors' directory is included in the manual.

Issued in furtherance of cooperative extension work in agriculture and home economics, Acts of May 8 and June 30, 1914, in cooperation with the U.S. Department of Agriculture, James L. Graves, Director of Cooperative Extension Service, University of Idaho, Moscow, Idaho 83843. We offer our programs and facilities to all people without regard to race, creed, color, sex, or national origin.

WATER MEASUREMENT

By D.C. LARSEN

Associate Extension Professor and Extension Irrigationist

Increasing demands from industry, recreational interests, municipal needs and agriculture are creating pressures on water, a very important and limited resource. The greater the demand, the greater the need for water users to use and share available water wisely. How can a user practice good management unless he knows the amount of water involved? Measuring water will help every user get his fair share and be treated equally.

In today's world good performance is demanded. In the quest for protection of the environment, water measurement will help reduce excessive waste and lessen drainage problems. It will establish a record of improved use and improve public relations.

Water is measured in two ways — in motion and at rest. Motion units used are Idaho miner's inches, gallons per minute and cubic feet per second. Rest units are acre-inches or acre-feet. These water measurement units are compared in Table 1. The depth of water applied in 12 or 24 hours by various stream sizes is shown in Table 2 for different acreages.

Table 1. Equivalent rates of flow.

Cubic feet per second (cfs)	Idaho Miner's inches	Gallons per minute (gpm)	Acre-inches per hour	Acre-feet per day (24 hours)
0.2	10	90	0.2	0.4
0.4	20	180	0.4	0.8
0.6	30	270	0.6	1.2
0.8	40	360	0.8	1.6
1.0	50	450	1.0	2.0
1.2	60	540	1.2	2.4
1.4	70	630	1.4	2.8
1.6	80	720	1.6	3.2
1.8	90	810	1.8	3.6
2.0	100	900	2.0	4.0
2.2	110	990	2.2	4.4
2.4	120	1080	2.4	4.8
2.6	130	1170	2.6	5.2
2.8	140	1260	2.8	5.6
3.0	150	1350	3.0	6.0
3.2	160	1440	3.2	6.4
3.4	170	1530	3.4	6.8
3.6	180	1620	3.6	7.2
3.8	190	1710	3.8	7.6
4.0	200	1800	4.0	8.0
5.0	250	2250	5.0	10.0
6.0	300	2700	6.0	12.0
7.0	350	3150	7.0	14.0
8.0	400	3600	8.0	16.0
9.0	450	4050	9.0	18.0
10.0	500	4500	10.0	20.0

Table 2. Depths of water applied by various flows, times and acres.

Water flow			Acres Applied									
Cubic ft per second	Idaho Miner's Inches	gal per min	1		2		3		4		5	
			12 h	24 h	12 h	24 h	12 h	24 h	12 h	24 h	12 h	24 h
			Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches
0.10	5	45	1.19	2.38	0.60	1.19	0.40	0.79	0.30	0.60	0.24	0.48
0.20	10	90	2.38	4.75	1.19	2.38	0.79	1.59	0.60	1.19	0.48	0.95
0.40	20	180	4.75	9.52	2.38	4.76	1.59	3.17	1.19	2.38	0.95	1.90
0.60	30	270	7.14	14.28	3.57	7.14	2.38	4.76	1.79	3.57	1.43	2.86
0.80	40	360	9.52	19.04	4.76	9.52	3.17	6.35	2.38	4.76	1.90	3.81
1.00	50	450	11.90	23.80	5.95	11.90	3.97	7.93	2.98	5.95	2.38	4.76
1.20	60	540	14.28	28.56	7.14	14.28	4.76	9.52	3.57	7.14	2.86	5.71
1.40	70	630	16.66	33.32	8.33	16.66	5.55	11.11	4.17	8.33	3.33	6.66
1.60	80	720	19.04	38.08	9.52	19.04	6.35	12.69	4.76	9.52	3.81	7.62
1.80	90	810	21.42	42.84	10.71	21.42	7.14	14.28	5.36	10.71	4.28	8.57
2.00	100	900	23.80	47.60	11.90	23.80	7.93	15.87	5.95	11.90	4.76	9.52
2.20	110	990							6.55	13.09	5.24	10.47
2.40	120	1080							7.14	14.28	5.71	11.42
2.60	130	1170							7.74	15.47	6.19	12.38
2.80	140	1260							8.33	16.66	6.66	13.33
3.00	150	1350							8.93	17.85	7.14	14.28


Table 2 (Continued). Depth of water applied by various flows, time and acres.

Water flow			Acres Applied									
Cubic ft per second	Idaho Miner's inches	gal per min	6		7		8		9		10	
			12 h	24 h	12 h	24 h	12 h	24 h	12 h	24 h	12 h	24 h
			Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches
0.10	5	45	0.24	0.40	0.17	0.34	0.15	0.30	0.13	0.26	0.12	0.24
0.20	10	90	0.40	0.79	0.34	0.68	0.30	0.60	0.26	0.53	0.24	0.48
0.40	20	180	0.79	1.59	0.68	1.36	0.60	1.19	0.53	1.06	0.48	0.95
0.60	30	270	1.19	2.38	1.02	2.04	0.89	1.79	0.79	1.59	0.71	1.43
0.80	40	360	1.59	3.17	1.36	2.72	1.19	2.38	1.06	2.12	0.95	1.90
1.00	50	450	1.98	3.97	1.70	3.40	1.49	2.98	1.32	2.64	1.19	2.38
1.20	60	540	2.38	4.76	2.04	4.08	1.79	3.57	1.59	3.17	1.43	2.86
1.40	70	630	2.78	5.55	2.38	4.76	2.08	4.17	1.85	3.70	1.67	3.33
1.60	80	720	3.17	6.35	2.72	5.44	2.38	4.76	2.12	4.23	1.90	3.81
1.80	90	810	3.57	7.14	3.06	6.12	2.68	5.36	2.38	4.76	2.12	4.28
2.00	100	900	3.97	7.93	3.40	6.80	2.98	5.95	2.64	5.29	2.38	4.75
2.20	110	990	4.36	8.73	3.74	7.48	3.27	6.55	2.91	5.82	2.62	5.24
2.40	120	1080	4.76	9.52	4.08	8.16	3.57	7.14	3.17	6.35	2.86	5.71
2.60	130	1170	5.16	10.31	4.42	8.84	3.87	7.74	3.44	6.88	3.09	6.19
2.80	140	1260	5.55	11.11	4.76	9.52	4.17	8.33	3.70	7.40	3.33	6.66
3.00	150	1350	5.95	11.90	5.10	10.20	4.46	8.93	3.97	7.93	3.57	7.14


Water is conveyed in both open channels and closed conduits. This bulletin will consider some of the standard water measuring devices designed to operate under open and closed flow conditions.

OPEN FLOW


Idaho has many miles of open canals and ditches. On-farm conveyance and distribution systems equipped with measuring devices will improve water distribution and make the irrigation job much easier.

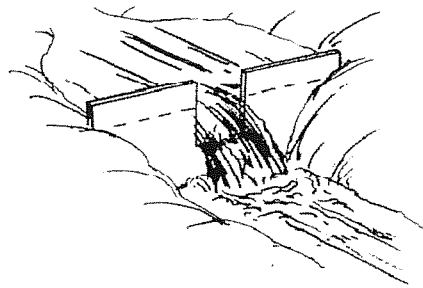

Rectangular weir

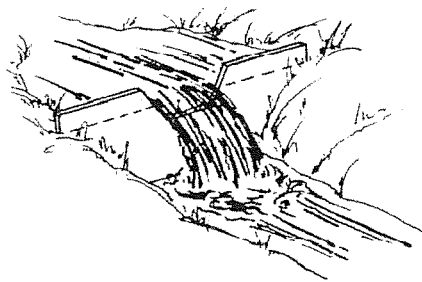

Cipolletti weir

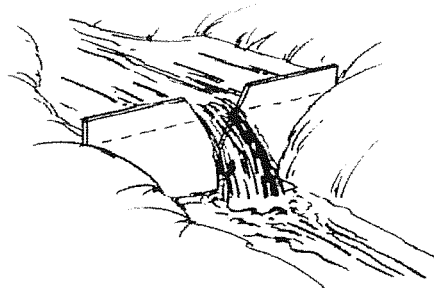

V-notch weir

Fig. 1. Three types of weirs used in Idaho.

Weirs

A weir is an over-pour notch of fixed dimensions in a vertical bulkhead or head wall through which water may flow. When properly constructed, installed and maintained, it provides a simple and accurate means of measuring water. Weirs are easy to construct and accurate if dimensions are followed carefully. They will handle floating trash and not clog easily.

Every water-measuring device has a set of standard operating conditions that must be met if it is to be accurate. If these conditions cannot be met at a given site, another measuring device should be used. A weir requires approximately a 6-inch drop between the upstream and downstream water surfaces. This loss in head is often not available in ditches with flat grades. The water must approach the weir crest very slowly. This condition is achieved by backing the water up in a weir pond with a bulkhead or head wall.


If the water is carrying silt it may settle out and fill the weir pond. This causes the approach velocity of the water to increase and the device becomes inaccurate. Grass and weeds thrive in the slow water and the weir pond requires maintenance to keep it free of silt and weeds.

Commonly used weirs, classified by the shape of the notch, are the rectangular weir, the Cipolletti weir, and the V-notch weir as illustrated in Fig. 1.

How to Install a Weir

A weir can perform accurately only if correctly constructed, installed and used. The following standard conditions must be followed:

1. Set the weir in a channel that is straight for a distance upstream from the weir of at least 10 times the weir crest length.
2. Place the weir at right angles to the direction of flow, and vertical.
3. The water approaching the weir should be free from eddies and flow slower than one-half foot per second. A weir pond can be created by the way the structure is built. The height of the crest above the bottom of the ditch should be at least twice the maximum head or depth of water flowing over the crest. The distance from the side of the weir notch to the side of the channel should be at least twice the maximum weir head. This is called a contracted weir. A bulkhead of the above proportions is used with a metal weir plate fastened to it.
4. Avoid backing the water up on the downstream side of the weir. Water must flow freely below the device, leaving an air space under the over-falling sheet of water. A concrete or rock apron should be used to prevent washing below the structure.
5. The weir plate containing the notch is usually made of steel plate no thicker than 1/8 inch. It must have exact dimensions and its edges must be rigid, straight and sharp on the upstream face. The notch should be beveled at 45 degrees on the downstream side. Avoid knife edges as they are difficult to maintain. The weir crest should be level and very accurate in length.
6. Select the crest size so the minimum head to be measured exceeds 2 inches and the maximum head is not greater than one-third the length of the weir.

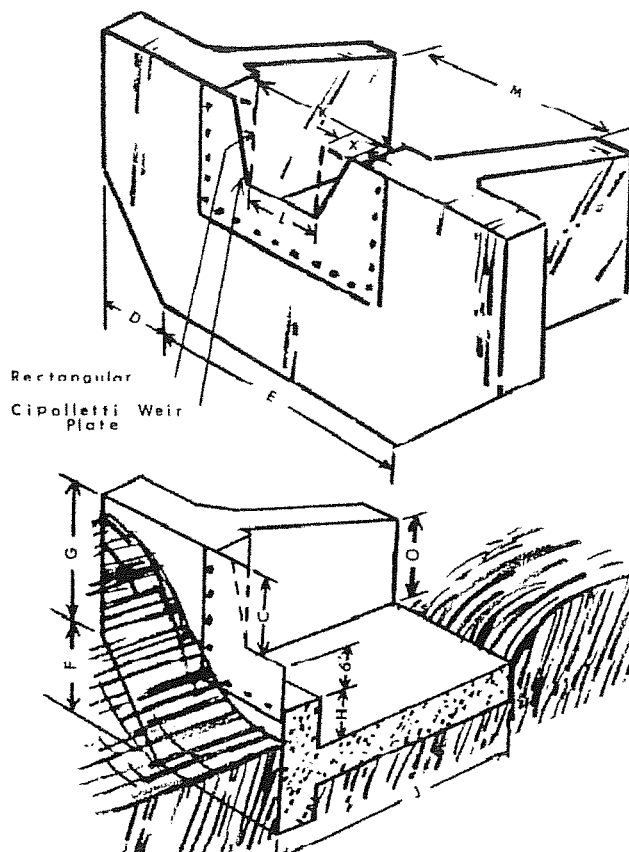

Crest length L ft.	Recommended range of measurement in C.F.S.		Symbol dimensions										
			C=H	D	E	F	G	J	K	M	N	O	X
	Rectangular	Cipolletti	ft-in	ft-in	ft-in	ft-in	ft-in	ft-in	ft-in	ft-in	ft-in	ft-in	in
For Rectangular and Cipolletti Weirs													
1.0	.2 to .6	.2 to .6	8	0	5.8	0	2.7	3	2	2.6	10	1.4	2
1.5	.3 to 1.7	.3 to 1.8	1	1.4	4.6	1.4	2	3.6	2.6	3	10	1.4	3
2.0	.4 to 3.5	.4 to 3.7	1.2	2	5	2	2	4	3	3.6	1	1.6	3½
3.0*	.6 to 9.5	.6 to 10.0	1.6	2.6	7	2.6	2.6	4.6	4.4	5	1.6	2	4½
4.0*	.8 to 19.5	.9 to 20.7	2	3.10	8.4	3.10	2.10	5	5.6	6	2	2.6	6
For 90° V-Notch Weirs													
2.0	.02 to 1.5		1	1.6	5	1.6	2.8	3.6	2.6	3	10	1.4	
3.0*	.02 to 4.0		1.6	2.2	6.2	2.2	3.4	4	3.6	4	1	1.6	

*Use 6" x 6" No. 12 wire mesh reinforcing or equivalent.

Fig. 2. Dimensions and capacities for Rectangular, Cipolletti and 90-degree V-notch weirs.

How to Measure

The water surface as it flows over the crest is drawn down as velocity increases. For this reason any measurement at or on the crest is not as accurate as the methods described below.

Drive a 2 x 2-inch flat-topped stake in the ground in the weir pool upstream from the crest a distance of 4 times the maximum head. Place the stake to one side in still water out of the way but readily accessible for taking readings. Use a carpenter's level or an engineer's level to set the top of the stake at the same height as the crest of the weir. The depth of flow is measured from the top of the stake to the surface of the water above it. In Idaho, frost will probably heave the stake out of place so that it would have to be re-set and maintained annually to keep the top at the same level as the weir crest.

An observation well (equipped with a staff gauge) next to the weir head wall and fed by a pipe from the weir pond will refine the reading.

Water depth may be measured on a bulkhead wide enough so the gauge can be attached to it in smooth water and be unaffected by the drawdown over the crest. The gauge should be at least 1 to 1½ feet away from the side of the notch. Place the zero on the staff gauge at the same height as the crest.

A rectangular weir is the simplest to construct. Its crest is horizontal and its sides perpendicular. Table 3 gives the discharges over various widths of rectangular weirs with complete contractions.

The Cipolletti weir (named after its inventor, Cesare Cipolletti, an Italian engineer) is used most in Idaho because it will measure slightly more water than a rectangular weir with the same crest length. It is more difficult to construct. The sides diverge outwardly at a 1 to 4 slope (1 inch horizontally to 4 inches vertically). The discharges for various widths of Cipolletti weirs with contractions are shown in Table 4.

The V-notch weir is designed to handle small flows accurately. A 90-degree angle or V-notch can be laid out very easily using a carpenter's square. Discharge tables for the V-notch with complete contractions are shown in Table 5. Construction details and dimensions for the weirs mentioned above are illustrated in Fig. 2.

Table 3. Flow over rectangular contracted weirs
in cubic feet per second*.

Head in ft. "H"	Head in inches, approx.	Crest length (L)					For each additional foot of crest in excess of 4 ft. (approx.)
		1.0 foot	1.5 feet	2.0 feet	3.0 feet	4.0 feet	
		Flow in cubic feet per second					
0.10	1-3/16	0.105	0.158	0.212	0.319	0.427	0.108
0.11	1-5/16	0.121	0.182	0.244	0.367	0.491	0.124
0.12	1-7/16	0.137	0.207	0.277	0.418	0.559	0.141
0.13	1-9/16	0.155	0.233	0.312	0.470	0.629	0.159
0.14	1-11/16	0.172	0.260	0.348	0.524	0.701	0.177
0.15	1-13/16	0.191	0.288	0.385	0.581	0.776	0.196
0.16	1-15/16	0.210	0.316	0.423	0.638	0.854	0.216
0.17	2-1/16	0.229	0.346	0.463	0.698	0.934	0.236
0.18	2-3/16	0.249	0.376	0.504	0.760	1.02	0.257
0.19	2-1/4	0.270	0.407	0.546	0.823	1.10	0.278
0.20	2-3/8	0.291	0.439	0.588	0.887	1.19	0.303
0.21	2-1/2	0.312	0.472	0.632	0.954	1.28	0.326
0.22	2-5/8	0.335	0.505	0.677	1.02	1.37	0.35
0.23	2-3/4	0.358	0.539	0.723	1.09	1.46	0.37
0.24	2-7/8	0.380	0.574	0.769	1.16	1.55	0.39
0.25	3	0.404	0.609	0.817	1.23	1.65	0.42
0.26	3-1/8	0.428	0.646	0.865	1.31	1.75	0.44
0.27	3-1/4	0.452	0.682	0.914	1.38	1.85	0.47
0.28	3-3/8	0.477	0.720	0.965	1.46	1.95	0.49
0.29	3-1/2	0.502	0.756	1.02	1.53	2.05	0.52
0.30	3-5/8	0.527	0.796	1.07	1.61	2.16	0.55
0.31	3-3/4	0.553	0.836	1.12	1.69	2.26	0.57
0.32	3-13/16	0.580	0.876	1.18	1.77	2.37	0.60
0.33	3-15/16	0.606	0.916	1.23	1.86	2.48	0.62
0.34	4-1/16	0.634	0.957	1.28	1.94	2.60	0.66
0.35	4-3/16	0.661	0.999	1.34	2.02	2.71	0.69
0.36	4-5/16	0.688	1.04	1.40	2.11	2.82	0.71
0.37	4-7/16	0.717	1.08	1.45	2.20	2.94	0.74
0.38	4-9/16	0.745	1.13	1.51	2.28	3.06	0.78
0.39	4-11/16	0.774	1.17	1.57	2.37	3.18	0.81
0.40	4-13/16	0.804	1.21	1.63	2.46	3.30	0.84
0.41	4-15/16	0.833	1.26	1.69	2.55	3.42	0.87
0.42	5-1/16	0.863	1.30	1.75	2.65	3.54	0.89
0.43	5-3/16	0.893	1.35	1.81	2.74	3.67	0.93
0.44	5-1/4	0.924	1.40	1.88	2.83	3.80	0.97
0.45	5-3/8	0.955	1.44	1.94	2.93	3.93	1.00
0.46	5-1/2	0.986	1.49	2.00	3.03	4.05	1.02
0.47	5-5/8	1.02	1.54	2.07	3.12	4.18	1.06
0.48	5-3/4	1.05	1.59	2.13	3.22	4.32	1.10
0.49	5-7/8	1.08	1.64	2.20	3.32	4.45	1.13
0.50	6	1.11	1.68	2.26	3.42	4.58	1.16
0.51	6-1/8	1.15	1.73	2.33	3.52	4.72	1.20
0.52	6-1/4	1.18	1.78	2.40	3.62	4.86	1.24
0.53	6-3/8	1.21	1.84	2.46	3.73	4.99	1.26
0.54	6-1/2	1.25	1.89	2.53	3.83	5.13	1.30
0.55	6-5/8	1.28	1.94	2.60	3.94	5.27	1.33
0.56	6-3/4	1.31	1.99	2.67	4.04	5.42	1.38
0.57	6-13/16	1.35	2.04	2.74	4.15	5.56	1.41
0.58	6-15/16	1.38	2.09	2.81	4.26	5.70	1.44
0.59	7-1/16	1.42	2.15	2.88	4.36	5.85	1.49

*Computed from Cote's formula: $Q = 3.247 L H^{3/2} \frac{0.566 L^{1/2}}{1 + 2 L^{1/2}} H^{1/2}$

Table 3 (Continued). Flow over rectangular contracted weirs.

Head in ft. "H"	Head in inches, approx.	Crest length (L)					For each additional foot of crest in excess of 4 ft. (approx.)
		1.0 foot	1.5 feet	2.0 feet	3.0 feet	4.0 feet	
		Flow in cubic feet per second					
0.60	7-3/16	1.45	2.20	2.96	4.47	6.00	1.53
0.61	7-5/16	1.49	2.25	3.03	4.59	6.14	1.55
0.62	7-7/16	1.52	2.31	3.10	4.69	6.29	1.60
0.63	7-9/16	1.56	2.36	3.17	4.81	6.44	1.63
0.64	7-11/16	1.60	2.42	3.25	4.92	6.59	1.67
0.65	7-13/16	1.63	2.47	3.32	5.03	6.75	1.72
0.66	7-15/16	1.67	2.53	3.40	5.15	6.90	1.75
0.67	8-1/16	1.71	2.59	3.47	5.26	7.05	1.79
0.68	8-3/16	1.74	2.64	3.56	5.38	7.21	1.83
0.69	8-1/4	1.78	2.70	3.63	5.49	7.36	1.87
0.70	8-3/8	1.82	2.76	3.71	5.61	7.52	1.91
0.71	8-1/2	1.86	2.81	3.78	5.73	7.68	1.95
0.72	8-5/8	1.90	2.87	3.86	5.85	7.84	1.99
0.73	8-3/4	1.93	2.93	3.94	5.97	8.00	2.03
0.74	8-7/8	1.97	2.99	4.02	6.09	8.17	2.08
0.75	9	2.01	3.05	4.10	6.21	8.33	2.12
0.76	9-1/8	2.05	3.11	4.18	6.33	8.49	2.16
0.77	9-1/4	2.09	3.17	4.26	6.45	8.66	2.21
0.78	9-3/8	2.13	3.23	4.34	6.58	8.82	2.24
0.79	9-1/2	2.17	3.29	4.42	6.70	8.99	2.29
0.80	9-5/8	2.21	3.35	4.51	6.83	9.16	2.33
0.81	9-3/4	2.25	3.41	4.59	6.95	9.33	2.38
0.82	9-13/16	2.29	3.47	4.67	7.08	9.50	2.42
0.83	9-15/16	2.33	3.54	4.75	7.21	9.67	2.46
0.84	10-1/16	2.37	3.60	4.84	7.33	9.84	2.51
0.85	10-3/16	2.41	3.66	4.92	7.46	10.01	2.55
0.86	10-5/16	2.46	3.72	5.01	7.59	10.19	2.60
0.87	10-7/16	2.50	3.79	5.10	7.72	10.36	2.64
0.88	10-9/16	2.54	3.85	5.18	7.85	10.54	2.69
0.89	10-11/16	2.58	3.92	5.27	7.99	10.71	2.72
0.90	10-13/16	2.62	3.98	5.35	8.12	10.89	2.77
0.91	10-15/16	2.67	4.05	5.44	8.25	11.07	2.82
0.92	11-1/16	2.71	4.11	5.53	8.38	11.25	2.87
0.93	11-3/16	2.76	4.18	5.62	8.52	11.43	2.91
0.94	11-1/4	2.79	4.24	5.71	8.65	11.61	2.96
0.95	11-3/8	2.84	4.31	5.80	8.79	11.79	3.00
0.96	11-1/2	2.88	4.37	5.89	8.93	11.98	3.05
0.97	11-5/8	2.93	4.44	5.98	9.06	12.16	3.10
0.98	11-3/4	2.97	4.51	6.07	9.20	12.34	3.14
0.99	11-7/8	3.01	4.57	6.15	9.34	12.53	3.19
1.00	12	3.06	4.64	6.25	9.48	12.72	3.24
1.01	12-1/8		4.71	6.34	9.62	12.91	3.29
1.02	12-1/4		4.78	6.43	9.76	13.10	3.34
1.03	12-3/8		4.85	6.52	9.90	13.28	3.38
1.04	12-1/2		4.92	6.62	10.04	13.47	3.43
1.05	12-5/8		4.98	6.71	10.18	13.66	3.48
1.06	12-3/4		5.05	6.80	10.32	13.85	3.53
1.07	12-13/16		5.12	6.90	10.46	14.04	3.58
1.08	12-15/16		5.20	6.99	10.61	14.24	3.63
1.09	13-1/16		5.26	7.09	10.75	14.43	3.68

Table 3 (Continued). Flow over rectangular contracted weirs.

Head in ft. "H"	Head in inches, approx.	Crest length (L)					For each additional foot of crest in excess of 4 ft. (approx.)
		1.0 foot	1.5 feet	2.0 feet	3.0 feet	4.0 feet	
		Flow in cubic feet per second					
1.10	13-3/16		5.34	7.19	10.90	14.64	3.74
1.11	13-5/16		5.41	7.28	11.04	14.83	3.79
1.12	13-7/16		5.48	7.38	11.19	15.03	3.84
1.13	13-9/16		5.55	7.47	11.34	15.22	3.88
1.14	13-11/16		5.62	7.57	11.48	15.42	3.94
1.15	13-13/16		5.69	7.66	11.64	15.62	3.98
1.16	13-15/16		5.77	7.76	11.79	15.82	4.03
1.17	14-1/16		5.84	7.86	11.94	16.02	4.08
1.18	14-3/16		5.91	7.96	12.09	16.23	4.14
1.19	14-1/4		5.98	8.06	12.24	16.43	4.19
1.20	14-3/8		6.06	8.16	12.39	16.63	4.24
1.21	14-1/2		6.13	8.26	12.54	16.83	4.29
1.22	14-5/8		6.20	8.35	12.69	17.03	4.34
1.23	14-3/4		6.28	8.46	12.85	17.25	4.40
1.24	14-7/8		6.35	8.56	12.99	17.45	4.46
1.25	15		6.43	8.66	13.14	17.65	4.51
1.26	15-1/8				13.30	17.87	4.57
1.27	15-1/4				13.45	18.07	4.62
1.28	15-3/8				13.61	18.28	4.67
1.29	15-1/2				13.77	18.50	4.73
1.30	15-5/8				13.93	18.71	4.78
1.31	15-3/4				14.09	18.92	4.82
1.32	15-13/16				14.24	19.12	4.88
1.33	15-15/16				14.40	19.34	4.94
1.34	16-1/16				14.56	19.55	4.99
1.35	16-3/16				14.72	19.77	5.05
1.36	16-5/16				14.88	19.98	5.10
1.37	16-7/16				15.04	20.20	5.16
1.38	16-9/16				15.20	20.42	5.22
1.39	16-11/16				15.36	20.64	5.28
1.40	16-13/16				15.53	20.86	5.33
1.41	16-15/16				15.69	21.08	5.39
1.42	17-1/16				15.85	21.29	5.44
1.43	17-3/16				16.02	21.52	5.50
1.44	17-1/4				16.19	21.74	5.55
1.45	17-3/8				16.34	21.96	5.62
1.46	17-1/2				16.51	22.18	5.67
1.47	17-5/8				16.68	22.41	5.73
1.48	17-3/4				16.85	22.64	5.79
1.49	17-7/8				17.01	22.85	5.84
1.50	18				17.17	23.08	5.91

Table 4. Flow over Cipolletti weirs in cubic feet per second.*

Head in ft. "H"	Head in inches, approx.	Crest length (L)					For each additional foot of crest in excess of 4 ft. (approx.)
		1.0 foot	1.5 feet	2.0 feet	3.0 feet	4.0 feet	
		Flow in cubic feet per second					
0.10	1-3/16	0.107	0.160	0.214	0.321	0.429	0.108
0.11	1-5/16	0.123	0.185	0.246	0.370	0.494	0.124
0.12	1-7/16	0.140	0.210	0.280	0.421	0.562	0.141
0.13	1-9/16	0.158	0.237	0.316	0.474	0.632	0.159
0.14	1-11/16	0.177	0.264	0.352	0.528	0.706	0.177
0.15	1-13/16	0.195	0.293	0.390	0.586	0.782	0.196
0.16	1-15/16	0.216	0.322	0.430	0.644	0.860	0.216
0.17	2-1/16	0.237	0.353	0.470	0.705	0.941	0.236
0.18	2-3/16	0.258	0.384	0.512	0.768	1.024	0.257
0.19	2-1/4	0.280	0.417	0.555	0.832	1.110	0.278
0.20	2-3/8	0.302	0.450	0.599	0.898	1.20	0.302
0.21	2-1/2	0.324	0.484	0.644	0.966	1.29	0.324
0.22	2-5/8	0.349	0.519	0.691	1.04	1.38	0.35
0.23	2-3/4	0.374	0.555	0.739	1.11	1.47	0.37
0.24	2-7/8	0.397	0.591	0.786	1.18	1.57	0.39
0.25	3	0.423	0.628	0.836	1.25	1.67	0.42
0.26	3-1/8	0.449	0.667	0.886	1.33	1.77	0.44
0.27	3-1/4	0.475	0.705	0.937	1.40	1.87	0.47
0.28	3-3/8	0.502	0.745	0.990	1.48	1.97	0.49
0.29	3-1/2	0.529	0.785	1.04	1.56	2.08	0.52
0.30	3-5/8	0.557	0.827	1.10	1.64	2.19	0.55
0.31	3-3/4	0.586	0.869	1.15	1.73	2.30	0.57
0.32	3-13/16	0.615	0.911	1.21	1.81	2.41	0.60
0.33	3-15/16	0.644	0.954	1.27	1.89	2.52	0.62
0.34	4-1/16	0.673	1.00	1.32	1.98	2.64	0.66
0.35	4-3/16	0.705	1.04	1.38	2.07	2.75	0.69
0.36	4-5/16	0.735	1.09	1.44	2.16	2.87	0.71
0.37	4-7/16	0.767	1.13	1.50	2.25	2.99	0.74
0.38	4-9/16	0.799	1.18	1.57	2.34	3.11	0.78
0.39	4-11/16	0.832	1.23	1.63	2.43	3.24	0.81
0.40	4-13/16	0.866	1.28	1.69	2.53	3.36	0.84
0.41	4-15/16	0.899	1.32	1.76	2.62	3.49	0.87
0.42	5-1/16	0.932	1.37	1.82	2.72	3.61	0.89
0.43	5-3/16	0.967	1.42	1.89	2.81	3.74	0.93
0.44	5-1/4	1.00	1.47	1.95	2.91	3.87	0.97
0.45	5-3/8	1.04	1.53	2.02	3.01	4.01	1.00
0.46	5-1/2	1.07	1.58	2.09	3.11	4.14	1.02
0.47	5-5/8	1.11	1.63	2.16	3.21	4.28	1.06
0.48	5-3/4	1.15	1.68	2.23	3.32	4.41	1.10
0.49	5-7/8	1.18	1.74	2.30	3.42	4.55	1.13
0.50	6	1.22	1.79	2.37	3.53	4.69	1.16
0.51	6-1/8	1.26	1.85	2.44	3.64	4.83	1.20
0.52	6-1/4	1.30	1.90	2.51	3.74	4.97	1.24
0.53	6-3/8	1.34	1.96	2.59	3.85	5.12	1.26
0.54	6-1/2	1.38	2.02	2.66	3.96	5.26	1.30
0.55	6-5/8	1.42	2.07	2.74	4.07	5.41	1.33
0.56	6-3/4	1.46	2.13	2.81	4.18	5.56	1.38
0.57	6-13/16	1.50	2.19	2.89	4.30	5.71	1.41
0.58	6-15/16	1.54	2.25	2.97	4.41	5.86	1.44
0.59	7-1/16	1.58	2.31	3.05	4.53	6.01	1.49

*Computed from Cote's formula: $Q = 3.247 L H^{3/2} \left(1 + \frac{0.566 L}{H} \right) H^{1/2} + 0.609 H^{5/2}$

Table 4 (Continued). Flow over Cipolletti weirs.

Head in ft. "H"	Head in inches, approx.	Crest length (L)					For each additional foot of crest in excess of 4 ft. (approx.)
		1.0 foot	1.5 feet	2.0 feet	3.0 feet	4.0 feet	
		Flow in cubic feet per second					
0.60	7-3/16	1.62	2.37	3.13	4.64	6.17	1.53
0.61	7-5/16	1.67	2.43	3.20	4.76	6.32	1.55
0.62	7-7/16	1.71	2.49	3.28	4.88	6.47	1.60
0.63	7-9/16	1.75	2.55	3.37	5.00	6.63	1.63
0.64	7-11/16	1.80	2.62	3.45	5.12	6.79	1.67
0.65	7-13/16	1.84	2.68	3.53	5.24	6.95	1.72
0.66	7-15/16	1.89	2.75	3.61	5.36	7.11	1.75
0.67	8-1/16	1.93	2.81	3.70	5.48	7.28	1.79
0.68	8-3/16	1.98	2.87	3.79	5.61	7.44	1.83
0.69	8-1/4	2.02	2.94	3.87	5.73	7.61	1.87
0.70	8-3/8	2.07	3.01	3.95	5.86	7.77	1.91
0.71	8-1/2	2.12	3.07	4.04	5.99	7.94	1.95
0.72	8-5/8	2.16	3.14	4.13	6.12	8.11	1.99
0.73	8-3/4	2.21	3.21	4.22	6.24	8.28	2.03
0.74	8-7/8	2.26	3.28	4.31	6.38	8.45	2.08
0.75	9	2.31	3.35	4.40	6.51	8.62	2.12
0.76	9-1/8	2.36	3.42	4.49	6.64	8.80	2.16
0.77	9-1/4	2.41	3.49	4.58	6.77	8.97	2.21
0.78	9-3/8	2.46	3.56	4.67	6.90	9.15	2.24
0.79	9-1/2	2.51	3.63	4.76	7.04	9.33	2.29
0.80	9-5/8	2.56	3.70	4.85	7.18	9.51	2.33
0.81	9-3/4	2.61	3.77	4.95	7.31	9.69	2.38
0.82	9-13/16	2.66	3.84	5.04	7.45	9.87	2.42
0.83	9-15/16	2.71	3.92	5.14	7.59	10.05	2.46
0.84	10-1/16	2.77	3.99	5.23	7.73	10.23	2.51
0.85	10-3/16	2.82	4.07	5.33	7.87	10.42	2.55
0.86	10-5/16	2.87	4.14	5.43	8.01	10.60	2.60
0.87	10-7/16	2.93	4.22	5.52	8.15	10.79	2.64
0.88	10-9/16	2.98	4.29	5.62	8.30	10.98	2.69
0.89	10-11/16	3.04	4.37	5.72	8.44	11.17	2.72
0.90	10-13/16	3.09	4.45	5.82	8.59	11.36	2.77
0.91	10-15/16	3.15	4.53	5.92	8.73	11.55	2.82
0.92	11-1/16	3.20	4.60	6.02	8.88	11.74	2.87
0.93	11-3/16	3.26	4.68	6.13	9.03	11.94	2.91
0.94	11-1/4	3.32	4.76	6.23	9.17	12.13	2.96
0.95	11-3/8	3.37	4.84	6.33	9.32	12.33	3.00
0.96	11-1/2	3.43	4.92	6.44	9.48	12.53	3.05
0.97	11-5/8	3.49	5.00	6.55	9.62	12.72	3.10
0.98	11-3/4	3.55	5.09	6.64	9.78	12.92	3.14
0.99	11-7/8	3.61	5.17	6.75	9.93	13.12	3.19
1.00	12	3.67	5.25	6.86	10.08	13.32	3.24
1.01	12-1/8		5.33	6.96	10.24	13.53	3.29
1.02	12-1/4		5.42	7.07	10.40	13.73	3.34
1.03	12-3/8		5.50	7.18	10.55	13.94	3.38
1.04	12-1/2		5.59	7.29	10.71	14.15	3.43
1.05	12-5/8		5.67	7.40	10.87	14.35	3.48
1.06	12-3/4		5.76	7.51	11.03	14.56	3.53
1.07	12-13/16		5.84	7.62	11.18	14.76	3.58
1.08	12-15/16		5.93	7.73	11.35	14.98	3.63
1.09	13-1/16		6.02	7.84	11.51	15.19	3.68

Table 4 (Concluded). Flow over Cipolletti weirs.

Head in ft. "H"	Head in inches, approx.	Crest length (L)					For each additional foot of crest in excess of 4 ft. (approx.)
		1 0 foot	1.5 feet	2.0 feet	3.0 feet	4.0 feet	
		Flow in cubic feet per second					
1.10	13-3/16		6.11	7.96	11.68	15.41	3.74
1.11	13-5/16		6.20	8.07	11.84	15.62	3.79
1.12	13-7/16		6.29	8.18	12.00	15.84	3.84
1.13	13-9/16		6.37	8.29	12.16	16.04	3.88
1.14	13-11/16		6.46	8.41	12.33	16.26	3.94
1.15	13-13/16		6.56	8.53	12.50	16.48	3.98
1.16	13-15/16		6.65	8.65	12.67	16.70	4.03
1.17	14-1/16		6.74	8.76	12.84	16.93	4.08
1.18	14-3/16		6.83	8.88	13.01	17.15	4.14
1.19	14-1/4		6.93	9.00	13.18	17.37	4.19
1.20	14-3/8		7.02	9.12	13.35	17.59	4.24
1.21	14-1/2		7.11	9.24	13.52	17.81	4.29
1.22	14-5/8		7.20	9.36	13.69	18.03	4.34
1.23	14-3/4		7.30	9.48	13.87	18.27	4.40
1.24	14-7/8		7.40	9.60	14.04	18.49	4.46
1.25	15		7.49	9.72	14.21	18.71	4.51
1.26	15-1/8				14.39	18.95	4.57
1.27	15-1/4				14.56	19.17	4.62
1.28	15-3/8				14.74	19.41	4.67
1.29	15-1/2				14.92	19.65	4.73
1.30	15-5/8				15.11	19.88	4.78
1.31	15-3/4				15.29	20.12	4.82
1.32	15-13/16				15.46	20.34	4.88
1.33	15-15/16				15.64	20.58	4.94
1.34	16-1/16				15.82	20.82	4.99
1.35	16-3/16				16.01	21.06	5.05
1.36	16-5/16				16.19	21.29	5.10
1.37	16-7/16				16.37	21.53	5.16
1.38	16-9/16				16.57	21.78	5.22
1.39	16-11/16				16.75	22.02	5.28
1.40	16-13/16				16.94	22.27	5.33
1.41	16-15/16				17.13	22.51	5.39
1.42	17-1/16				17.31	22.75	5.44
1.43	17-3/16				17.51	23.01	5.50
1.44	17-1/4				17.70	23.26	5.55
1.45	17-3/8				17.89	23.50	5.62
1.46	17-1/2				18.08	23.75	5.67
1.47	17-5/8				18.28	24.01	5.73
1.48	17-3/4				18.47	24.26	5.79
1.49	17-7/8				18.66	24.50	5.84
1.50	18				18.85	24.75	5.91

Table 5. Flow over 90° V-notch weirs in cubic feet per second.*

Head H	Discharge Q	Head H	Discharge Q	Head H	Discharge Q
Feet or Inches	Sec-feet	Feet or Inches	Sec-feet	Feet or Inches	Sec-feet
.10	1-3/16 0.008	.50	6 0.445	.90	10-13/16 1.92
.11	1-5/16 0.010	.51	6-1/8 0.468	.91	10-15/16 1.97
.12	1-7/16 0.012	.52	6-1/4 0.491	.92	11-1/16 2.02
.13	1-9/16 0.016	.53	5-3/8 0.515	.93	11-3/16 2.08
.14	1-11/16 0.019	.54	6-1/2 0.539	.94	11-1/4 2.13
.15	1-13/16 0.022	.55	6-5/8 0.564	.95	11-3/8 2.19
.16	1-15/16 0.026	.56	6-3/4 0.590	.96	11-1/2 2.25
.17	2-1/16 0.031	.57	6-13/16 0.617	.97	11-5/8 2.31
.18	2-3/16 0.035	.58	6-15/16 0.644	.98	11-3/4 2.37
.19	2-1/4 0.040	.59	7-1/16 0.672	.99	11-7/8 2.43
.20	2-3/8 0.046	.60	7-3/16 0.700	1.00	12 2.49
.21	2-1/2 0.052	.61	7-5/16 0.730	1.01	12-1/8 2.55
.22	2-5/8 0.058	.62	7-7/16 0.760	1.02	12-1/4 2.61
.23	2-3/4 0.065	.63	7-9/16 0.790	1.03	12-3/8 2.68
.24	2-7/8 0.072	.64	7-11/16 0.822	1.04	12-1/2 2.74
.25	3 0.080	.65	6-13/16 0.854	1.05	12-5/8 2.81
.26	3-1/8 0.088	.66	7-15/16 0.887	1.06	12-3/4 2.87
.27	3-1/4 0.096	.67	8-1/16 0.921	1.07	12-13/16 2.94
.28	3-3/8 0.106	.68	8-3/16 0.955	1.08	12-15/16 3.01
.29	3-1/2 0.115	.69	8-1/4 0.991	1.09	13-1/16 3.08
.30	3-5/8 0.125	.70	8-3/8 1.03	1.10	13-3/16 3.15
.31	3-3/4 0.136	.71	8-1/2 1.06	1.11	13-5/16 3.22
.32	3-13/16 0.147	.72	8-5/8 1.10	1.12	13-7/16 3.30
.33	3-15/16 0.159	.73	8-3/4 1.14	1.13	13-9/16 3.37
.34	4-1/16 0.171	.74	8-7/8 1.18	1.14	13-11/16 3.44
.35	4-3/16 0.184	.75	9 1.22	1.15	13-13/16 3.52
.36	4-5/16 0.197	.76	9-1/8 1.26	1.16	13-15/16 3.59
.37	4-7/16 0.211	.77	9-1/4 1.30	1.17	14-3/16 3.67
.38	4-9/16 0.225	.78	9-3/8 1.34	1.18	14-5/16 3.75
.39	4-11/16 0.240	.79	9-1/2 1.39	1.19	14-1/4 3.83
.40	4-13/16 0.256	.80	9-5/8 1.43	1.20	14-3/8 3.91
.41	4-15/16 0.272	.81	9-3/4 1.48	1.21	14-1/2 3.99
.42	5-1/16 0.289	.82	9-13/16 1.52	1.22	14-5/8 4.07
.43	5-3/16 0.306	.83	9-15/16 1.57	1.23	14-3/4 4.16
.44	5-1/4 0.324	.84	10-1/16 1.61	1.24	14-7/8 4.24
.45	5-3/8 0.343	.85	10-3/16 1.66	1.25	15 4.33
.46	5-1/2 0.362	.86	10-5/16 1.71		
.47	5-5/8 0.382	.87	10-7/16 1.76		
.48	5-3/4 0.403	.88	10-9/16 1.81		
.49	5-7/8 0.424	.89	10-11/16 1.86		

* Computed from Cones formula: $Q=2.49H^{3/2}$

Table 6.

Figure 4. Parshall Flume

Flumes

Flow measuring flumes are open-channel devices containing a specially-shaped constricted-throat section. They can be constructed from metal, concrete or fiberglass. Standard designs are available to measure water over a wide flow range. Two types are commonly used, Parshall and trapezoidal. Either can be made on the farm or purchased commercially.

Flumes can operate in a flat ditch and require a relatively small head loss. They are self-cleaning and do not require a pool upstream to reduce the approach velocity. Flumes can operate accurately over a wide range of flows. The velocity of water as it approaches the flume has little effect upon its operation. Unless submergence (water backing up in the throat) occurs, only one head measurement is required to obtain the correct flow. The pre-built flumes can easily be re-set in colder areas where the frost might heave them out each winter.

Flumes are relatively expensive when cast in place. Considerable care must be used in forming them to the correct shape and dimensions, such as throat width, drop and diverging sections and gauging wells. The size of the flume is determined by the throat width. For instance, a 6-inch flume would have a 6-inch throat width.

Parshall Flume

The Parshall flume, developed by Ralph Parshall at Colorado State University, is the oldest and most widely used flume. This flume is illustrated in Fig. 4. Dimensions and capacities for Parshall flumes ranging in size from 6 inches to 4 feet are shown in Fig. 5. Larger sizes are available.

How to Install

1. The direction of water flow must be "in line" with the structure. The flow should be reasonable smooth, free from turbulence and uniformly distributed across the channel.
2. The flume should be installed to operate under free flow conditions if possible. Free flow occurs when the elevation of the water surface near the downstream end of the throat section is not high enough to reduce flow due to water backing up in the throat.

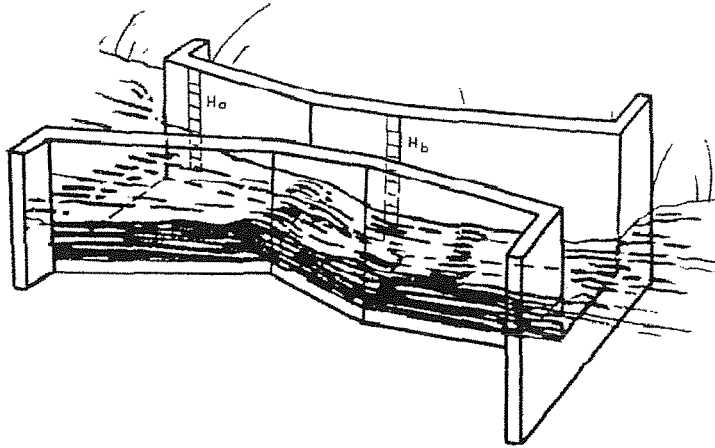


Fig. 4. Parshall measuring flume.

3. In most cases the flume is set with the floor (or crest) elevated above the ditch bottom to prevent excessive submergence. The amount to raise the flume corresponds to the head loss through the structure at about 70% submergence. The flume is set so the water elevation at H_A is higher than the normal tailwater downstream by an amount equal to the head loss. The head loss at 70% submergence is the difference between H_A and 0.7 times H_A or 0.3 H_A .
4. The floor of the converging section must be level both lengthwise and crosswise.


How to Measure

For free flow, one measurement of water depth at H_A is all that is required. Discharge tables are shown in Table 7.

A staff gauge attached to the inside wall at H_A will function for a depth measurement. The water surface here is often turbulent and a reading will be more accurate if a stilling well is installed with the zero of the gauge level with the crest of the flume.

The Parshall flume can be operated with a high degree of submergence — up to 70%. This means it will be accurate as long as the ratio H_B/H_A is less than 0.70. Below this figure only H_A need be measured.

When submergence or H_B/H_A is greater than 0.70 a correction must be made. To do this the discharge given by the water depth H_A is multiplied by the correction factor Q/Q_0 for the degree of submergence and corresponding flume size shown in Fig. 6. This correction can reduce flow by a factor of up to 45%.

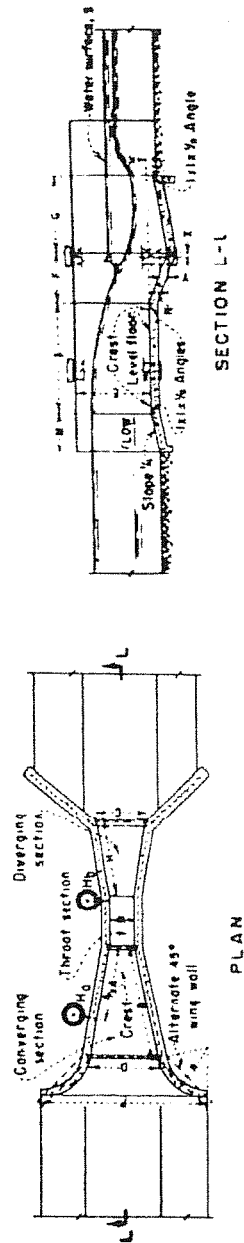

W	A	2A	B	C	D	E	F	G	H	K	M		N	P	R		X	Y	Free-Flow Capacity	
											Ft-in	Ft-in			Ft-in	Ft-in			Minimum	Maximum
0.3	1.63/8	1 1/4	1.6	0.7	3.10 3/16	1.6	0.6	1.0	1.5/32	0.1			0.2%				0.1	0.1%	0.03	1.13
0.6	2.7/16	1.45/16	2.0	1.3 1/2	1.35/8	2.0	1.0	2.0		0.3	1.0		0.4%	2.11 1/2	1.4		0.2	0.3	0.05	3.9
0.9	2.10 5/8	1.11 1/8	2.10	1.3	1.05/8	2.6	1.0	1.6		0.3	1.0	0.4%		3.6 1/2	1.4	0.2	0.3	0.09	8.9	
1.0	4.6	3.0	4.4 7/8	2.0	2.9 1/4	3.0	2.0	3.0		0.3	1.3		0.5	4.10 3/4	1.8	0.2	0.3	0.11	16.1	
1.6	4.9	3.2	4.7 7/8	2.6	3.4 3/8	3.0	2.0	3.0		0.3	1.3		0.5	5.6	1.8	0.2	0.3	0.15	24.6	
2.0	5.0	3.4	4.10 7/8	3.0	3.11 1/2	3.0	2.0	3.0		0.3	1.3		0.5	6.1	1.8	0.2	0.3	0.2	33.1	
3.0	5.6	3.6	5.4 3/4	4.0	3.1 7/8	3.0	2.0	3.0		0.3	1.3		0.5	7.3 1/2	1.8	0.2	0.3	0.3	50.4	
4.0	6.0	4.0	5.10 5/8	5.0	4.1 1/4	3.0	2.0	3.0		0.3	1.6		0.9	8.10 3/4	2.0	0.2	0.3	0.3	67.9	
5.0	6.6	4.4	6.4 1/2	6.0	7.6 5/8	3.0	2.0	3.0		0.3	1.6		0.5	10.1 1/4	2.0	0.2	0.3	0.3	85.6	
6.0	7.0	4.8	6.10 3/8	7.0	8.9	3.0	2.0	3.0		0.3	1.6		0.5	11.1 1/2	2.0	0.2	0.3	0.3	103.5	
7.0	7.6	5.0	7.4 1/4	8.0	9.11 3/8	3.0	2.0	3.0		0.3	1.6		0.5	12.6	2.0	0.2	0.3	0.3	121.4	
8.0	8.0	5.4	7.10 1/8	9.0	1.1 3/4	3.0	2.0	3.0		0.3	1.6		0.9	13.8 1/4	2.0	0.2	0.3	0.3	139.5	
10.0	8.0	6.0	14.0	12.0	15.7 1/4	4.0	3.0	6.0		0.6			1.5%			0.9	1.0	0.6	200	

Fig. 5. Dimensions and capacities for Parshall measuring flume.

Table 7. Free flow through Parshall measuring flumes
in cubic feet per second.

Head		Throat width							
Feet	Inches (approx.)	3"	6"	8"	1'	1.5'	2'	3'	4'
(Flow in cubic feet per second)									
0.10	1-3/16	0.028	0.05	0.09	0.11	0.15			
0.11	1-5/16	0.033	0.06	0.10	0.12	0.18			
0.12	1-7/16	0.037	0.07	0.12	0.14	0.20			
0.13	1-9/16	0.042	0.08	0.14	0.16	0.24			
0.14	1-11/16	0.047	0.09		0.18	0.27			
0.15	1-13/16	0.053	0.10	0.17	0.20	0.30			
0.16	1-15/16	0.058	0.11	0.19	0.23	0.34			
0.17	2-1/16	0.064	0.12	0.20	0.26	0.38			
0.18	2-3/16	0.070	0.14	0.22	0.29	0.42			
0.19	2-1/4	0.076	0.15	0.24	0.32	0.46			
0.20	2-3/8	0.082	0.16	0.26	0.35	0.50	0.66	0.97	1.26
0.21	2-1/2	0.089	0.18	0.28	0.37	0.54	0.71	1.04	1.36
0.22	2-5/8	0.095	0.19	0.30	0.40	0.58	0.77	1.12	1.47
0.23	2-3/4	0.102	0.20	0.32	0.43	0.63	0.82	1.20	1.58
0.24	2-7/8	0.109	0.22	0.35	0.46	0.67	0.88	1.28	1.69
0.25	3	0.117	0.23	0.37	0.49	0.71	0.93	1.37	1.80
0.26	3-1/8	0.124	0.25	0.39	0.51	0.76	0.99	1.46	1.91
0.27	3-1/4	0.131	0.26	0.41	0.54	0.80	1.05	1.55	2.03
0.28	3-3/8	0.138	0.28	0.44	0.56	0.85	1.11	1.64	2.15
0.29	3-1/2	0.146	0.29	0.46	0.61	0.90	1.18	1.73	2.27
0.30	3-5/8	0.154	0.31	0.49	0.64	0.94	1.24	1.82	2.39
0.31	3-3/4	0.162	0.32	0.51	0.68	0.99	1.30	1.92	2.52
0.32	3-13/16	0.170	0.34	0.54	0.71	1.04	1.37	2.02	2.65
0.33	3-15/16	0.179	0.36	0.56	0.74	1.09	1.44	2.12	2.78
0.34	4-1/16	0.187	0.38	0.59	0.77	1.14	1.50	2.22	2.92
0.35	4-3/16	0.196	0.39	0.62	0.80	1.19	1.57	2.32	3.06
0.36	4-5/16	0.205	0.41	0.64	0.84	1.25	1.64	2.42	3.19
0.37	4-7/16	0.213	0.43	0.67	0.88	1.30	1.72	2.53	3.34
0.38	4-9/16	0.222	0.45	0.70	0.92	1.36	1.79	2.64	3.48
0.39	4-11/16	0.231	0.47	0.73	0.95	1.41	1.86	2.75	3.62
0.40	4-13/16	0.241	0.48	0.76	0.99	1.47	1.93	2.86	3.77
0.41	4-15/16	0.250	0.50	0.78	1.03	1.53	2.01	2.97	3.92
0.42	5-1/16	0.260	0.52	0.81	1.07	1.58	2.09	3.08	4.07
0.43	5-3/16	0.269	0.54	0.84	1.11	1.64	2.16	3.20	4.22
0.44	5-1/4	0.279	0.56	0.87	1.15	1.70	2.24	3.32	4.38
0.45	5-3/8	0.289	0.58	0.90	1.19	1.76	2.32	3.44	4.54
0.46	5-1/2	0.299	0.61	0.94	1.23	1.82	2.40	3.56	4.70
0.47	5-5/8	0.309	0.63	0.97	1.27	1.88	2.48	3.68	4.86
0.48	5-3/4	0.319	0.65	1.00	1.31	1.94	2.57	3.80	5.03
0.49	5-7/8	0.329	0.67	1.03	1.35	2.00	2.65	3.92	5.20
0.50	6	0.339	0.69	1.06	1.39	2.06	2.73	4.05	5.36
0.51	6-1/8	0.350	0.71	1.10	1.44	2.13	2.82	4.18	5.53
0.52	6-1/4	0.361	0.73	1.13	1.48	2.19	2.90	4.31	5.70
0.53	6-3/8	0.371	0.76	1.16	1.52	2.25	2.99	4.44	5.88
0.54	6-1/2	0.382	0.78	1.20	1.57	2.32	3.08	4.57	6.05
0.55	6-5/8	0.393	0.80	1.23	1.62	2.39	3.17	4.70	6.23
0.56	6-3/4	0.404	0.82	1.26	1.66	2.45	3.26	4.84	6.41
0.57	6-13/16	0.415	0.85	1.30	1.70	2.52	3.35	4.98	6.59
0.58	6-15/16	0.427	0.87	1.33	1.75	2.59	3.44	5.11	6.77
0.59	7-1/16	0.438	0.89	1.37	1.80	2.66	3.53	5.25	6.96

Table 7 (Continued). Free flow through Parshall measuring flumes
in cubic feet per second.

Head		Throat width							
Feet	Inches	3"	6"	9"	1'	1.5'	2'	3'	4'
(approx.)		(Flow in cubic feet per second)							
0.60	7-3/16	0.450	0.92	1.40	1.84	2.73	3.62	5.39	7.15
0.61	7-5/16	0.462	0.94	1.44	1.88	2.80	3.72	5.53	7.34
0.62	7-7/16	0.474	0.97	1.48	1.93	2.87	3.81	5.68	7.53
0.63	7-9/16	0.485	0.99	1.51	1.98	2.95	3.91	5.82	7.72
0.64	7-11/16	0.497	1.02	1.55	2.03	3.02	4.01	5.97	7.91
0.65	7-13/16	0.509	1.04	1.59	2.08	3.09	4.11	6.12	8.11
0.66	7-15/16	0.522	1.07	1.63	2.13	3.17	4.20	6.26	8.31
0.67	8-1/16	0.534	1.10	1.66	2.18	3.24	4.30	6.41	8.51
0.68	8-3/16	0.546	1.12	1.70	2.23	3.31	4.40	6.56	8.71
0.69	8-1/4	0.558	1.15	1.74	2.28	3.39	4.50	6.71	8.91
0.70	8-3/8	0.571	1.17	1.78	2.33	3.46	4.60	6.86	9.11
0.71	8-1/2	0.584	1.20	1.82	2.38	3.54	4.70	7.02	9.32
0.72	8-5/8	0.597	1.23	1.86	2.43	3.62	4.81	7.17	9.53
0.73	8-3/4	0.610	1.26	1.90	2.48	3.69	4.91	7.33	9.74
0.74	8-7/8	0.623	1.28	1.94	2.53	3.77	5.02	7.49	9.95
0.75	9		1.31	1.98	2.58	3.85	5.12	7.65	10.2
0.76	9-1/8		1.34	2.02	2.63	3.93	5.23	7.81	10.4
0.77	9-1/4		1.36	2.06	2.68	4.01	5.34	7.97	10.6
0.78	9-3/8		1.39	2.10	2.74	4.09	5.44	8.13	10.8
0.79	9-1/2		1.42	2.14	2.80	4.17	5.55	8.30	11.0
0.80	9-5/8		1.45	2.18	2.85	4.26	5.66	8.46	11.3
0.81	9-3/4		1.48	2.22	2.90	4.34	5.77	8.63	11.5
0.82	9-13/16		1.50	2.27	2.96	4.42	5.88	8.79	11.7
0.83	9-15/16		1.53	2.31	3.02	4.50	6.00	8.96	11.9
0.84	10-1/16		1.56	2.35	3.07	4.59	6.11	9.13	12.2
0.85	10-3/16		1.59	2.39	3.12	4.69	6.22	9.30	12.4
0.86	10-5/16		1.62	2.44	3.18	4.76	6.33	9.48	12.6
0.87	10-7/16		1.65	2.48	3.24	4.84	6.44	9.65	12.8
0.88	10-9/16		1.68	2.52	3.29	4.93	6.56	9.82	13.1
0.89	10-11/16		1.71	2.57	3.35	5.01	6.68	10.0	13.3
0.90	10-13/16		1.74	2.61	3.41	5.10	6.80	10.2	13.6
0.91	10-15/16		1.77	2.66	3.46	5.19	6.92	10.4	13.8
0.92	11-1/16		1.81	2.70	3.52	5.28	7.03	10.5	14.0
0.93	11-3/16		1.84	2.75	3.58	5.37	7.15	10.7	14.3
0.94	11-1/4		1.87	2.79	3.64	5.46	7.27	10.9	14.5
0.95	11-3/8		1.90	2.84	3.70	5.55	7.39	11.1	14.8
0.96	11-1/2		1.93	2.88	3.76	5.64	7.51	11.3	15.0
0.97	11-5/8		1.97	2.93	3.82	5.73	7.63	11.4	15.3
0.98	11-3/4		2.00	2.98	3.88	5.82	7.75	11.6	15.5
0.99	11-7/8		2.03	3.02	3.94	5.91	7.88	11.8	15.8
1.00	12		2.06	3.07	4.00	6.00	8.00	12.0	16.0
1.01	12-1/8		2.09	3.12	4.06	6.09	8.12	12.2	16.3
1.02	12-1/4		2.12	3.17	4.12	6.19	8.25	12.4	16.5
1.03	12-3/8		2.16	3.21	4.18	6.28	8.38	12.6	16.8
1.04	12-1/2		2.19	3.26	4.25	6.37	8.50	12.8	17.0
1.05	12-5/8		2.22	3.31	4.31	6.47	8.63	13.0	17.3
1.06	12-3/4		2.26	3.36	4.37	6.56	8.76	13.2	17.5
1.07	12-13/16		2.29	3.40	4.43	6.66	8.88	13.3	17.8
1.08	12-15/16		2.32	3.45	4.50	6.75	9.01	13.5	18.1
1.09	13-1/16		2.36	3.50	4.56	6.85	9.14	13.7	18.3

Table 7 (Continued). Free flow through Parshall measuring flumes
in cubic feet per second.

Head		Throat width						
Feet	Inches (approx.)	3"	6"	9"	1'	1.5'	2'	3'
		(Flow in cubic feet per second)						
1.10	13-9/16	2.40	3.55	4.62	6.95	9.27	13.9	18.6
1.11	13-5/16	2.43	3.60	4.68	7.04	9.40	14.1	18.9
1.12	13-7/16	2.46	3.65	4.75	7.14	9.54	14.3	19.1
1.13	13-9/16	2.50	3.70	4.82	7.24	9.67	14.5	19.4
1.14	13-11/16	2.53	3.75	4.88	7.34	9.80	14.7	19.7
1.15	13-13/16	2.57	3.80	4.94	7.44	9.94	14.9	19.9
1.16	13-15/16	2.60	3.85	5.01	7.54	10.1	15.1	20.2
1.17	14-1/16	2.64	3.90	5.08	7.64	10.2	15.3	20.5
1.18	14-3/16	2.68	3.95	5.15	7.74	10.3	15.6	20.8
1.19	14-1/4	2.71	4.01	5.21	7.84	10.5	15.8	21.1
1.20	14-3/8	2.75	4.06	5.28	7.94	10.6	16.0	21.3
1.21	14-1/2	2.78	4.11	5.34	8.05	10.8	16.2	21.6
1.22	14-5/8	2.82	4.16	5.41	8.15	10.9	16.4	21.9
1.23	14-3/4	2.86	4.22	5.48	8.25	11.0	16.6	22.2
1.24	14-7/8	2.89	4.27	5.55	8.36	11.2	16.8	22.5
1.25	15		4.32	5.62	8.46	11.3	17.0	22.8
1.26	15-1/8		4.37	5.69	8.56	11.5	17.2	23.0
1.27	15-1/4		4.43	5.76	8.67	11.6	17.4	23.3
1.28	15-3/8		4.48	5.82	8.77	11.7	17.7	23.6
1.29	15-1/2		4.53	5.89	8.88	11.9	17.9	23.9
1.30	15-5/8		4.59	5.96	8.99	12.0	18.1	24.2
1.31	15-3/4		4.64	6.03	9.09	12.2	18.3	24.5
1.32	15-13/16		4.69	6.10	9.20	12.3	18.5	24.8
1.33	15-15/16		4.75	6.18	9.30	12.4	18.8	25.1
1.34	16-1/16		4.80	6.25	9.41	12.6	19.0	25.4
1.35	16-3/16		4.86	6.32	9.52	12.7	19.2	25.7
1.36	16-5/16		4.92	6.39	9.63	12.9	19.4	26.0
1.37	16-7/16		4.97	6.46	9.74	13.0	19.6	26.3
1.38	16-9/16		5.03	6.53	9.85	13.2	19.9	26.6
1.39	16-11/16		5.08	6.60	9.95	13.3	20.1	26.9
1.40	16-13/16			6.68	10.1	13.5	20.3	27.2
1.41	16-15/16			6.75	10.2	13.6	20.6	27.5
1.42	17-1/16			6.82	10.3	13.8	20.8	27.8
1.43	17-3/16			6.89	10.4	13.9	21.0	28.1
1.44	17-1/4			6.97	10.5	14.1	21.2	28.5
1.45	17-3/8			7.04	10.6	14.2	21.3	28.8
1.46	17-1/2			7.12	10.7	14.4	21.7	29.1
1.47	17-5/8			7.19	10.8	14.5	21.9	29.4
1.48	17-3/4			7.26	11.0	14.7	22.2	29.7
1.49	17-7/8			7.34	11.1	14.9	22.4	30.0
1.50	18			7.41	11.2	15.0	22.6	30.3


RAMPED BROAD CRESTED WEIR¹

General Description

The ramped broad crested weir (RBCW) has been used successfully in a number of canals in Southern Idaho and is one of several types of broad crested weirs. This device requires only a single upstream depth measurement for discharge determination. The structure can not be used to regulate flow, but is capable of accurately measuring a wide range of discharges. Construction costs for this weir may be relatively lower than other measurement structures used on larger ditches or canals. The RBCW also passes floating debris and sediment well. As with other weirs and flumes, normal periodic maintenance is required.

Installation and Measurement

A computer model has been developed for use in designing the RBCW and allows the weir to be tailored to fit the channel configuration. The computer program also generates a rating table using the as-built dimensions. Discharge is then determined by reading the height of water on the staff gauge with the corresponding height listed on the computer generated rating table. Further detailed information about the weir and computer program may be obtained from the University of Idaho Kimberly Research and Extension Center or the Idaho Department of Water Resources.

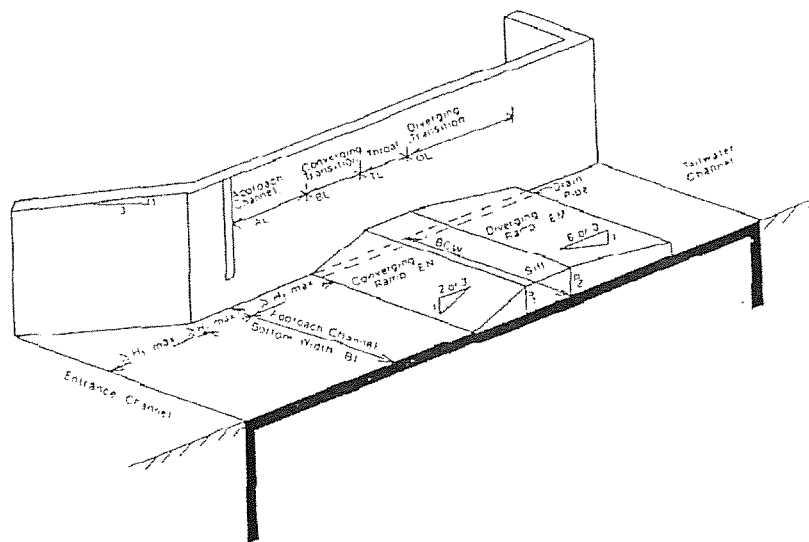

Schematic view of a ramped broad crested weir.

¹ RBCW text and figures reprinted from France, K.E. and Brockway, C.E., Flow Measurement Using Ramped Broad Crested Weirs. Idaho Water Resource Research Institute, University of Idaho, Moscow, Idaho. September, 1987.

CONSTANT HEAD ORIFICE TURNOUT (CHO)¹


General Description

The constant head orifice turnout (CHO) is a combination regulating and measuring structure that uses an adjustable submerged orifice for the discharge measurement. The structure has been developed and widely adopted by the Bureau of Reclamation. Its operation is based upon setting and maintaining a constant head differential (usually 0.20 foot) across the orifice. Discharges are varied by changing the gate opening, that is, the area of the orifice. The rate of flow is measured by using the principle that a submerged orifice of a given size operating under a specific differential head will always pass the same known quantity of water.

The CHO turnout consists of a short entrance channel leading to a headwall containing one or more gate-controlled openings, a stilling basin section, and a downstream headwall with one or more gate-controlled openings that release the flow into the delivery channel. The turnouts are usually placed at right angles to the main canal. The upstream gate or gates constitute the orifice, the size of which can be increased or decreased by opening or closing the gates. The head across the orifice is measured at a constant value, usually 0.20 foot, by adjusting the downstream gate or gates, and is measured by staff gauges or stilling wells upstream and downstream from the orifice gate headwall.

How to Measure

The opening of the orifice for the desired discharge is obtained from discharge tables. With the upstream gates set at this opening, the downstream gates are adjusted until the differential head across the orifice as measured by the staff gauges or stilling wells is at the required constant head (usually 0.20 foot). The discharge will then be at the desired value.

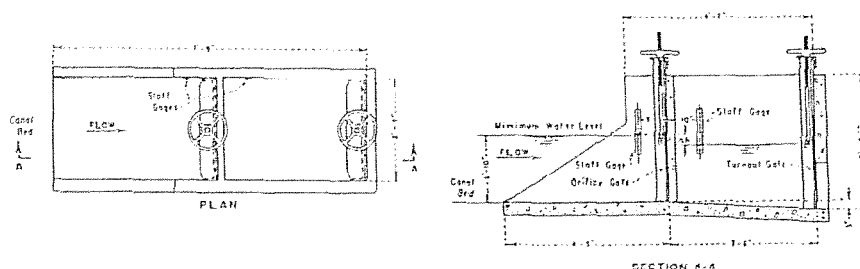

Schematic view of a CHO turnout with a horizontal inlet channel

¹CHO text, figures and tables reprinted from Water Measurement Manual, Department of Interior Bureau of Reclamation. Second Edition Revised Reprint: 1984 (Denver) pp. 95-99, 298-299.

WATER MEASUREMENT MANUAL

TABLES

Table 32.—Discharge of constant-head orifice turnout in second-feet.
Capacity 20 second-feet, gate size 30 by 24 inches, $\Delta h=0.20$
foot. (See sec. 64.)

Discharge, second-feet	Gate opening in feet		Discharge, second-feet	Gate opening in feet	
	2 gates	1 gate		2 gates	1 gate
0.25	0.02	0.04	10.25	0.81	
.50	.04	.06	10.50	.83	
.75	.06	.12	10.75	.85	
1.00	.08	.16	11.00	.87	
1.25	.10	.20	11.25	.89	
1.50	.12	.24	11.50	.91	
1.75	.14	.28	11.75	.93	
2.00	.16	.32	12.00	.95	
2.25	.18	.36	12.25	.97	
2.50	.20	.40	12.50	.99	
2.75	.22	.44	12.75	1.01	
3.00	.24	.48	13.00	1.03	
3.25	.26	.52	13.25	1.05	
3.50	.28	.56	13.50	1.07	
3.75	.30	.60	13.75	1.085	
4.00	.32	.64	14.00	1.10	
4.25	.34	.68	14.25	1.12	
4.50	.36	.72	14.50	1.14	
4.75	.38	.755	14.75	1.16	
5.00	.40	.79	15.00	1.18	
5.25	.42	.83	15.25	1.20	
5.50	.44	.87	15.50	1.22	
5.75	.46	.91	15.75	1.24	
6.00	.48	.95	16.00	1.26	
6.25	.50	.99	16.25	1.28	
6.50	.52	1.03	16.50	1.30	
6.75	.54	1.065	16.75	1.32	
7.00	.56	1.10	17.00	1.34	
7.25	.58	1.14	17.25	1.355	
7.50	.60	1.18	17.50	1.37	
7.75	.62	1.22	17.75	1.39	
8.00	.64	1.26	18.00	1.41	
8.25	.66	1.30	18.25	1.43	
8.50	.68	1.34	18.50	1.45	
8.75	.70	1.375	18.75	1.47	
9.00	.72	1.41	19.00	1.49	
9.25	.74	1.45	19.25	1.51	
9.50	.76	1.49	19.50	1.53	
9.75	.775	1.525	19.75	1.545	
10.00	.79	1.56	20.00	1.56	

Table 33.—Discharge of constant-head orifice turnout in second-feet.
Capacity 10 second-feet, gate size 24 by 18 inches, $\Delta h=0.20$
foot. (See sec. 64.)

Discharge, second-feet	Gate opening in feet		Discharge, second-feet	Gate opening in feet	
	2 gates	1 gate		2 gates	1 gate
0.25	0.021	0.05	4.25	0.525	
.50	.05	.10	4.50	.525	
.75	.075	.15	4.75	.525	
1.00	.10	.20	5.00	.60	
1.25	.125	.25	5.25	.625	
1.50	.15	.30	5.50	.65	
1.75	.175	.35	5.75	.675	
2.00	.20	.40	6.00	.70	
2.25	.225	.45	6.25	.725	
2.50	.25	.50	6.50	.75	
2.75	.275	.55	6.75	.775	
3.00	.30	.60	7.00	.80	
3.25	.325	.65	7.25	.815	
3.50	.35	.70	7.50	.83	
3.75	.375	.75	7.75	.85	
4.00	.40	.80	8.00	.86	
4.25	.425	.84	8.25	.875	
4.50	.45	.89	8.50	.89	
4.75	.475	.94	8.75	.91	
5.00	.50	.99	9.00	.925	
			9.25	.94	
			9.50	.965	
			9.75	.97	
			10.0		

CERTIFICATE OF SERVICE

I HEREBY CERTIFY that on this 3 day of September, 2013, true and correct copies of the documents described below were served by placing a copy of the same with the United States Postal Service, postage prepaid and properly addressed to the following:

Documents Served: Controllable-lockable Diversion Works and Measureable Device Order Pine Creek and Tributaries

RANDY E NOAH
2874 WARFIELD RD
CAMBRIDGE ID 83610

SONJA C HAUXWELL
DONALD L HAUXWELL
PO BOX 131
CAMBRIDGE ID 83610

MARDELLE SHINN
CLIFFORD W SHINN
3239 HWY 71
CAMBRIDGE ID 83610

KATHERINE M RUST
CARL W RUST
41 BONDS FLAT RD
LA GRANGE CA 95329

WILLIAM J NANCE
4525 W LAMONT
MERIDIAN ID 83642

JAMES L BUMGARNER
2934 HWY 71
CAMBRIDGE ID 83610

LINDA M KELLAR
LARRY J KELLAR
PO BOX 164
CAMBRIDGE ID 83610

MARY L SHIRTS
FRANK C SHIRTS
HC 69 BOX 3450
CAMBRIDGE ID 83610

CHARLES R EDWARDS
BOX 281
CAMBRIDGE ID 83610

MICHAEL D MACEDO
1254 W 1ST ST
WEISER ID 83672

CUDDY MEADOWS RANCH LLP
2165 SEID CREEK RD
CAMBRIDGE ID 83610

LILA L DOWNEY
HC 69 BOX 3650
CAMBRIDGE ID 83610

STEPHEN C MACKEY
RUTH MACKEY
2095 SEID CREEK RD
CAMBRIDGE ID 83610

ZOLA A NOAH
BILL E NOAH
2490 W PINE CREEK RD
CAMBRIDGE ID 83610

ARVID MYHRE
FERRINI RANCH
PO BOX 459
SAN ARDO CA 93450

NORMAN HANSEN
SANDRA HANSEN
2982 HWY 71
CAMBRIDGE ID 83610

GUY AMIDON
KAREN AMIDON
2711 TONEY LN
CAMBRIDGE ID 83610

MONTE R SPIERING
HOLLY K SPIERING
2591 HORSE FLAT RD
CAMBRIDGE ID 83610

MINK LAND & LIVESTOCK CO
2920 HWY 95
CAMBRIDGE ID 83610

JACK R BARKER
768 JONATHAN RD
WEISER ID 83672

RAY POTTER
INA C POTTER
PO BOX 95
CAMBRIDGE ID 83610

LELAND W DAVIS
LOUISE F DAVIS
2971 HWY 71
CAMBRIDGE ID 83610

GORDAN S GALUS
PO BOX 298
CAMBRIDGE ID 83610

STATE OF IDAHO
DEPT OF FISH & GAME
PO BOX 25
BOISE ID 83707

PINE CREEK PROPERTY OWNERS
IRR ASSN
C/O PEARL J KETZ
PO BOX 190
CAMBRIDGE ID 836100

USDA FOREST SERVICE - BOISE
NATIONAL FOREST
1249 VINNELL WAY SUITE 200
BOISE ID 83709

WENDELL HORN
3645 MILL CREEK RD
CAMBRIDGE ID 83610

MARY NOAH
CREED A NOAH
3039 HWY 71
CAMBRIDGE ID 83610

NICHOLAS W WIEBE
DEBORAH J WIEBE
PO BOX 13
CAMBRIDGE ID 83610

JANICE I LEE
2707 TONEY LN
CAMBRIDGE ID 83610

HAROLD W GIBSON
C/O GENE GIBSON
20 LILAC LN
SAGLE ID 83860

CINDY M SEDLACEK-NANCE
4240 W VICTORY
MERIDIAN ID 83642

RANDY HOWLAND
HC 69 BOX 3360
CAMBRIDGE ID 83610

CHARLES R EDWARDS
BOX 281
CAMBRIDGE ID 83610

ROBERT STINNETT
3068 HWY 71
CAMBRIDGE ID 83610

MILLER FAMILY TRUST
7000 S MERIDIAN RD
MERIDIAN ID 83642

MELISSA A NOAH
CREED N NOAH
2925 COVE RD
CAMBRIDGE ID 83610


ROBERT T WOODY
SHARON M WOODY
63210 MC KENZIE LN
SUMMERVILLE OR 97876

DIANE E DOWNEY
KENNETH F DOWNEY
2373 LAPPIN LN
COUNCIL ID 83612

MARVIN G CLURE
SHIRLEY A CLURE
PO BOX 337
CAMBRIDGE ID 83610

NATURAL RESOURCE
CONSERVATION SERVICE
849 E 9TH
WEISER ID 83672

BRANDI HORTON
WATERMASTER #67
2297 SNAPP LN
MIDVALE ID 83645



Megan Gregory
Office Specialist II